

Алматы (7273)495-231
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35


Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(7172)727-132

Киргизия +996(312)96-26-47

<https://liv.nt-rt.ru/> || vis@nt-rt.ru



Product description

standard Swivel transport castor with brake with an overall height of 180 mm

Wheel diameter x width: 150 x 40 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with roller bearing and black rubber tyre with hardness 80 ° Shore A on polypropylene

the double brake system, brakes the turning of the wheel and the swivel rotation.

Approved and tested load capacity

Dynamic 170 kg

Static 210 kg

Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

Advantages of this Smooth drive wheel Swivel transport castor with brake:

- ✓ wet floor
- ✓ reduces the transmission of both vibration and noise
- ✓ with low obstacles

LIV SYSTEMS standard Swivel transport castor with brake + black rubber tyre Ø150 x W40mm for 170kg Prod ID: 31213

ID 31213: Castor overall height 180 mm | 4 mounting holes with distance 105x80 mm | Wheel with roller bearing and black rubber tyre with hardness 80 ° Shore A | The double brake system, brakes the turning of the wheel and the swivel rotation. | Smooth dri

Product information

- Article code 2-931 ISO
- SKU 31213
- EAN 3838461312137



Product description

standard Wheel with plain bearing and grey rubber tyre with hardness 83 ° Shore A on polypropylene

Wheel diameter x width: 150 x 40 mm

Axle hole: 20 mm

Hub length: 58 mm

Approved and tested load capacity

Dynamic 170 kg

Static 210 kg

Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

Advantages of this Elegant trip wheel:

- ✓ rubber is non-marking and leaves no marks on the floor
- ✓ reduces the transmission of both vibration and noise
- ✓ and outdoor use

LIV SYSTEMS standard wheel + grey rubber tyre Ø150 x W40mm for 170kg

Prod ID: 39365

ID 39365: standard Wheel with plain bearing and grey rubber tyre with hardness 83 ° Shore A on polypropylene | Axle hole: 20 mm | Hub length: 58 mm | Elegant trip, Grey rubber is non-marking and leaves no marks on the floor, rubber reduces the transmission

Product information

- Article code 2-945 ISO
- SKU 39365
- EAN 3838461393655



Product description

standard Wheel with roller bearing and grey rubber tyre with hardness 83 ° Shore A on polypropylene

Wheel diameter x width: 150 x 40 mm

Axle hole: 20 mm

Hub length: 58 mm

Approved and tested load capacity

Dynamic 170 kg

Static 210 kg

Temperature range:

Continous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

Advantages of this Elegant trip wheel:

- ✓ rubber is non-marking and leaves no marks on the floor
- ✓ reduces the transmission of both vibration and noise
- ✓ and outdoor use

LIV SYSTEMS standard wheel + grey rubber tyre Ø150 x W40mm for 170kg

Prod ID: 39364

ID 39364: standard Wheel with roller bearing and grey rubber tyre with hardness 83 ° Shore A on polypropylene | Axle hole: 20 mm | Hub length: 58 mm | Elegant trip, Grey rubber is non-marking and leaves no marks on the floor, rubber reduces the transmissio

Product information

- Article code 2-945 A
- SKU 39364
- EAN 3838461393648



Product description

standard Swivel castor with an overall height of 180 mm

Wheel diameter x width: 150 x 40 mm

Top plate with 4 mounting holes of #\$\$ mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 93 mm

Wheel with roller bearing and grey rubber tyre with hardness 83 ° Shore A on polypropylene.

Approved and tested load capacity

Dynamic 170 kg

Static 210 kg

Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

Advantages of this Elegant trip Swivel castor:

- ✓ rubber is non-marking and leaves no marks on the floor
- ✓ reduces the transmission of both vibration and noise
- ✓ and outdoor use

LIV SYSTEMS standard Swivel castor + grey rubber tyre Ø150 x W40mm for 170kg Prod ID: 39474

ID 39474: Castor overall height 180 mm | 4 mounting holes with distance #\$\$ mm | Wheel with roller bearing and grey rubber tyre with hardness 83 ° Shore A | Elegant trip, Grey rubber is non-marking and leaves no marks on the floor, rubber reduces the tran

Product information

- Article code 2-968 ISO
- SKU 39474
- EAN 3838461394744



Product description

standard Wheel with roller bearing and black rubber tyre with hardness 80 ° Shore A on polypropylene

Wheel diameter x width: 150 x 40 mm

Axle hole: 20 mm

Hub length: 58 mm

Approved and tested load capacity

Dynamic 170 kg

Static 210 kg

Temperature range:

Continous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

Advantages of this Smooth drive wheel wheel:

- ✓ wet floor
- ✓ reduces the transmission of both vibration and noise
- ✓ with low obstacles

LIV SYSTEMS standard transport wheel + black rubber tyre Ø150 x W40mm for 170kg Prod ID: 30245

ID 30245: standard Wheel with roller bearing and black rubber tyre with hardness 80 ° Shore A on polypropylene | Axle hole: 20 mm | Hub length: 58 mm | Smooth drive wheel, for wet floor, rubber reduces the transmission of both vibration and noise, perfect

Product information

- Article code 2-945 A
- SKU 30245
- EAN 3838461302459



Product description

standard Wheel with roller bearing and black rubber tyre with hardness 80 ° Shore A on steel rim with electrogalvanization zinc plating anti-corrosion protection Cr6-free

Wheel diameter x width: 150 x 40 mm

Axle hole: 20 mm

Hub length: 58 mm

Approved and tested load capacity

Dynamic 170 kg

Static 210 kg

Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

Advantages of this Comfortable drive wheel:

- ✓ to manoeuvre
- ✓ performance on uneven floor or obstacles
- ✓ and strong wheel systems


LIV SYSTEMS standard transport wheel + black rubber tyre Ø150 x W40mm for 170kg Prod ID: 54154

ID 54154: standard Wheel with roller bearing and black rubber tyre with hardness 80 ° Shore A on steel rim with electrogalvanization zinc plating anti-corrosion protection Cr6-free | Axle hole: 20 mm | Hub length: 58 mm |

Comfortable drive, easy to manoeuvre

Product information

- Article code 2-425 ISO
- SKU 54154
- EAN 3838461541544

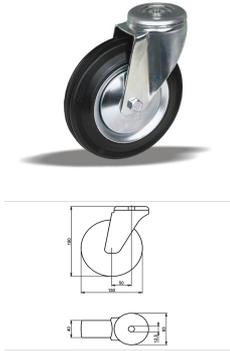

Product description

standard Swivel transport castor with an overall height of 180 mm

Wheel diameter x width: 150 x 40 mm

Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 93 mm

Wheel with roller bearing and black rubber tyre with hardness 80 ° Shore A on steel rim with electrogalvanization zinc plating anti-corrosion protection Cr6-free.

Approved and tested load capacity

Dynamic 170 kg

Static 210 kg

Temperature range:

Continious operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

Advantages of this Comfortable drive Swivel transport castor:

- ✓ to manoeuvre
- ✓ performance on uneven floor or obstacles
- ✓ and strong wheel systems

LIV SYSTEMS standard Swivel transport castor + black rubber tyre Ø150 x W40mm for 170kg Prod ID: 34025

ID 34025: Castor overall height 180 mm | 4 mounting holes with distance #\$\$ mm | Wheel with roller bearing and black rubber tyre with hardness 80 ° Shore A | Comfortable drive, easy to manoeuvre, good performance on uneven floor or obstacles, robust and s

Product information


- Article code 2-631 L12
- SKU 34025
- EAN 3838461340253

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)



Product description

standard Swivel castor with an overall height of 180 mm

Wheel diameter x width: 150 x 40 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with plain bearing and grey rubber tyre with hardness 83 ° Shore A on polypropylene.

Approved and tested load capacity

Dynamic 170 kg

Static 210 kg

Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

Advantages of this Elegant trip Swivel castor:

- ✓ rubber is non-marking and leaves no marks on the floor
- ✓ reduces the transmission of both vibration and noise
- ✓ and outdoor use

LIV SYSTEMS standard Swivel castor + grey rubber tyre Ø150 x W40mm for 170kg Prod ID: 39395

ID 39395: Castor overall height 180 mm | 4 mounting holes with distance 105x80 mm | Wheel with plain bearing and grey rubber tyre with hardness 83 ° Shore A | Elegant trip, Grey rubber is non-marking and leaves no marks on the floor, rubber reduces the tr

Product information


- Article code 2-924 ISO
- SKU 39395
- EAN 3838461393952

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)



Product description

standard Swivel castor with an overall height of 180 mm

Wheel diameter x width: 150 x 40 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with roller bearing and grey rubber tyre with hardness 83 ° Shore A on polypropylene.

Approved and tested load capacity

Dynamic 170 kg

Static 210 kg

Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

Advantages of this Elegant trip Swivel castor:

- ✓ rubber is non-marking and leaves no marks on the floor
- ✓ reduces the transmission of both vibration and noise
- ✓ and outdoor use

LIV SYSTEMS standard Swivel castor + grey rubber tyre Ø150 x W40mm for 170kg Prod ID: 39394

ID 39394: Castor overall height 180 mm | 4 mounting holes with distance 105x80 mm | Wheel with roller bearing and grey rubber tyre with hardness 83 ° Shore A | Elegant trip, Grey rubber is non-marking and leaves no marks on the floor, rubber reduces the t

Product information


- Article code 2-917 ISO
- SKU 39394
- EAN 3838461393945

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)



Product description

standard Swivel castor with brake with an overall height of 180 mm

Wheel diameter x width: 150 x 40 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x110 mm and top plate outer dimensions: 135x110 mm

Wheel with plain bearing and grey rubber tyre with hardness 83 ° Shore A on polypropylene

the double brake system, brakes the turning of the wheel and the swivel rotation.

Approved and tested load capacity

Dynamic 170 kg

Static 210 kg

Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

Advantages of this Elegant trip Swivel castor with brake:

- ✓ rubber is non-marking and leaves no marks on the floor
- ✓ reduces the transmission of both vibration and noise
- ✓ and outdoor use

LIV SYSTEMS standard Swivel castor with brake + grey rubber tyre Ø150 x W40mm for 170kg Prod ID: 39434

ID 39434: Castor overall height 180 mm | 4 mounting holes with distance 105x110 mm | Wheel with plain bearing and grey rubber tyre with hardness 83 ° Shore A | The double brake system, brakes the turning of the wheel and the swivel rotation. | Elegant tri

Product information


- Article code 2-938 ISO
- SKU 39434
- EAN 3838461394348

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)



Product description

standard Swivel castor with brake with an overall height of 180 mm

Wheel diameter x width: 150 x 40 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x110 mm and top plate outer dimensions: 135x110 mm

Wheel with roller bearing and grey rubber tyre with hardness 83 ° Shore A on polypropylene

the double brake system, brakes the turning of the wheel and the swivel rotation.

Approved and tested load capacity

Dynamic 170 kg

Static 210 kg

Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

Advantages of this Elegant trip Swivel castor with brake:

- ✓ rubber is non-marking and leaves no marks on the floor
- ✓ reduces the transmission of both vibration and noise
- ✓ and outdoor use

LIV SYSTEMS standard Swivel castor with brake + grey rubber tyre Ø150 x W40mm for 170kg Prod ID: 39433

ID 39433: Castor overall height 180 mm | 4 mounting holes with distance 105x110 mm | Wheel with roller bearing and grey rubber tyre with hardness 83 ° Shore A | The double brake system, brakes the turning of the wheel and the swivel rotation. | Elegant tr

Product information

- Article code 2-931 ISO
- SKU 39433
- EAN 3838461394331

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)



Product description

standard Swivel castor with an overall height of 180 mm

Wheel diameter x width: 150 x 40 mm

Top plate with 4 mounting holes of #\$\$ mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 93 mm

Wheel with plain bearing and grey rubber tyre with hardness 83 ° Shore A on polypropylene.

Approved and tested load capacity

Dynamic 170 kg

Static 210 kg

Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

Advantages of this Elegant trip Swivel castor:

- ✓ rubber is non-marking and leaves no marks on the floor
- ✓ reduces the transmission of both vibration and noise
- ✓ and outdoor use

LIV SYSTEMS standard Swivel castor + grey rubber tyre Ø150 x W40mm for 170kg Prod ID: 39475

ID 39475: Castor overall height 180 mm | 4 mounting holes with distance #\$\$ mm | Wheel with plain bearing and grey rubber tyre with hardness 83 ° Shore A | Elegant trip, Grey rubber is non-marking and leaves no marks on the floor, rubber reduces the trans

Product information

- Article code 2-975 ISO
- SKU 39475
- EAN 3838461394751



Product description

standard Swivel castor with brake with an overall height of 180 mm

Wheel diameter x width: 150 x 40 mm

Top plate with 4 mounting holes of 40 mm, mounting hole distance 100 mm and top plate outer dimensions: 93 mm

Wheel with plain bearing and grey rubber tyre with hardness 83 ° Shore A on polypropylene the double brake system, brakes the turning of the wheel and the swivel rotation.

Approved and tested load capacity

Dynamic 170 kg

Static 210 kg

Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

Advantages of this Elegant trip Swivel castor with brake:

- ✓ rubber is non-marking and leaves no marks on the floor
- ✓ reduces the transmission of both vibration and noise
- ✓ and outdoor use

LIV SYSTEMS standard Swivel castor with brake + grey rubber tyre Ø150 x W40mm for 170kg Prod ID: 39524

ID 39524: Castor overall height 180 mm | 4 mounting holes with distance 100 mm | Wheel with plain bearing and grey rubber tyre with hardness 83 ° Shore A | The double brake system, brakes the turning of the wheel and the swivel rotation. | Elegant trip, G

Product information

- 
- Article code 2-989 ISO
 - SKU 39524
 - EAN 3838461395246



Product description

standard Swivel castor with brake with an overall height of 180 mm

Wheel diameter x width: 150 x 40 mm

Top plate with 4 mounting holes of 40 mm, mounting hole distance 100 mm and top plate outer dimensions: 93 mm

Wheel with roller bearing and grey rubber tyre with hardness 83 ° Shore A on polypropylene the double brake system, brakes the turning of the wheel and the swivel rotation.

Approved and tested load capacity

Dynamic 170 kg

Static 210 kg

Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

Advantages of this Elegant trip Swivel castor with brake:


- ✓ rubber is non-marking and leaves no marks on the floor
- ✓ reduces the transmission of both vibration and noise
- ✓ and outdoor use

LIV SYSTEMS standard Swivel castor with brake + grey rubber tyre Ø150 x W40mm for 170kg Prod ID: 39523

ID 39523: Castor overall height 180 mm | 4 mounting holes with distance 100 mm | Wheel with roller bearing and grey rubber tyre with hardness 83 ° Shore A | The double brake system, brakes the turning of the wheel and the swivel rotation. | Elegant trip,

Product information

- 
- Article code 2-982 ISO
 - SKU 39523
 - EAN 3838461395239



Product description

standard Swivel castor with an overall height of 180 mm

Wheel diameter x width: 150 x 40 mm

Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 93 mm

Wheel with plain bearing and grey rubber tyre with hardness 83 ° Shore A on polypropylene.

Approved and tested load capacity

Dynamic 170 kg

Static 210 kg

Temperature range:

Continous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

Advantages of this Elegant trip Swivel castor:

- ✓ rubber is non-marking and leaves no marks on the floor
- ✓ reduces the transmission of both vibration and noise
- ✓ and outdoor use

LIV SYSTEMS standard Swivel castor + grey rubber tyre Ø150 x W40mm for 170kg Prod ID: 39564

ID 39564: Castor overall height 180 mm | 4 mounting holes with distance #\$\$ mm | Wheel with plain bearing and grey rubber tyre with hardness 83 ° Shore A | Elegant trip, Grey rubber is non-marking and leaves no marks on the floor, rubber reduces the trans

Product information


- Article code 2-975 L12
- SKU 39564
- EAN 3838461395642

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)



Product description

standard Swivel castor with an overall height of 180 mm

Wheel diameter x width: 150 x 40 mm

Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 93 mm

Wheel with roller bearing and grey rubber tyre with hardness 83 ° Shore A on polypropylene.

Approved and tested load capacity

Dynamic 170 kg

Static 210 kg

Temperature range:

Continous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

Advantages of this Elegant trip Swivel castor:

- ✓ rubber is non-marking and leaves no marks on the floor
- ✓ reduces the transmission of both vibration and noise
- ✓ and outdoor use

LIV SYSTEMS standard Swivel castor + grey rubber tyre Ø150 x W40mm for 170kg Prod ID: 39563

ID 39563: Castor overall height 180 mm | 4 mounting holes with distance #\$\$ mm | Wheel with roller bearing and grey rubber tyre with hardness 83 ° Shore A | Elegant trip, Grey rubber is non-marking and leaves no marks on the floor, rubber reduces the tran

Product information


- Article code 2-968 L12
- SKU 39563
- EAN 3838461395635

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

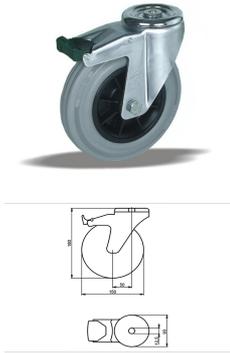

Product description

standard Swivel castor with brake with an overall height of 180 mm
 Wheel diameter x width: 150 x 40 mm
 Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 93 mm
 Wheel with plain bearing and grey rubber tyre with hardness 83 ° Shore A on polypropylene
 the double brake system, brakes the turning of the wheel and the swivel rotation.

Approved and tested load capacity

Dynamic 170 kg
 Static 210 kg

Temperature range:

Continious operation: -20 | +70°C
 Short (10 min) exposure: -30 | +80°C

Advantages of this Elegant trip Swivel castor with brake:

- ✓ rubber is non-marking and leaves no marks on the floor
- ✓ reduces the transmission of both vibration and noise
- ✓ and outdoor use

LIV SYSTEMS standard Swivel castor with brake + grey rubber tyre Ø150 x W40mm for 170kg Prod ID: 39605

ID 39605: Castor overall height 180 mm | 4 mounting holes with distance #\$\$ mm | Wheel with plain bearing and grey rubber tyre with hardness 83 ° Shore A | The double brake system, brakes the turning of the wheel and the swivel rotation. | Elegant trip, G


Product information

- Article code 2-989 L12
- SKU 39605
- EAN 3838461396052

Specifications

The result of our quality is maximum performance!

[Close](#)
[Close](#)

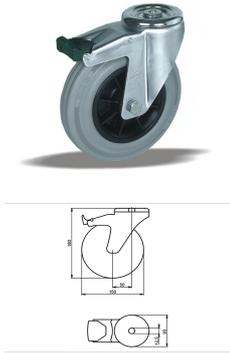

Product description

standard Swivel castor with brake with an overall height of 180 mm
 Wheel diameter x width: 150 x 40 mm
 Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 93 mm
 Wheel with roller bearing and grey rubber tyre with hardness 83 ° Shore A on polypropylene
 the double brake system, brakes the turning of the wheel and the swivel rotation.

Approved and tested load capacity

Dynamic 170 kg
 Static 210 kg

Temperature range:

Continious operation: -20 | +70°C
 Short (10 min) exposure: -30 | +80°C

Advantages of this Elegant trip Swivel castor with brake:

- ✓ rubber is non-marking and leaves no marks on the floor
- ✓ reduces the transmission of both vibration and noise
- ✓ and outdoor use

LIV SYSTEMS standard Swivel castor with brake + grey rubber tyre Ø150 x W40mm for 170kg Prod ID: 39604

ID 39604: Castor overall height 180 mm | 4 mounting holes with distance #\$\$ mm | Wheel with roller bearing and grey rubber tyre with hardness 83 ° Shore A | The double brake system, brakes the turning of the wheel and the swivel rotation. | Elegant trip,


Product information

- Article code 2-982 L12
- SKU 39604
- EAN 3838461396045

Specifications

The result of our quality is maximum performance!

[Close](#)
[Close](#)

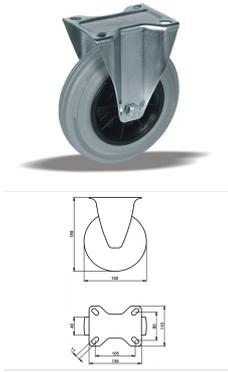

Product description

standard Fixed castor with an overall height of 180 mm

Wheel diameter x width: 150 x 40 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with plain bearing and grey rubber tyre with hardness 83 ° Shore A on polypropylene.

Approved and tested load capacity

Dynamic 170 kg

Static 210 kg

Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

Advantages of this Elegant trip Fixed castor:

- ✓ rubber is non-marking and leaves no marks on the floor
- ✓ reduces the transmission of both vibration and noise
- ✓ and outdoor use

LIV SYSTEMS standard Fixed castor + grey rubber tyre Ø150 x W40mm for 170kg Prod ID: 39645

ID 39645: Castor overall height 180 mm | 4 mounting holes with distance 105x80 mm | Wheel with plain bearing and grey rubber tyre with hardness 83 ° Shore A | Elegant trip, Grey rubber is non-marking and leaves no marks on the floor, rubber reduces the tr

Product information


- Article code 2-961 ISO
- SKU 39645
- EAN 3838461396458

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

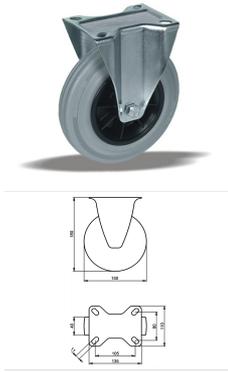

Product description

standard Fixed castor with an overall height of 180 mm

Wheel diameter x width: 150 x 40 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with roller bearing and grey rubber tyre with hardness 83 ° Shore A on polypropylene.

Approved and tested load capacity

Dynamic 170 kg

Static 210 kg

Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

Advantages of this Elegant trip Fixed castor:

- ✓ rubber is non-marking and leaves no marks on the floor
- ✓ reduces the transmission of both vibration and noise
- ✓ and outdoor use

LIV SYSTEMS standard Fixed castor + grey rubber tyre Ø150 x W40mm for 170kg Prod ID: 39644

ID 39644: Castor overall height 180 mm | 4 mounting holes with distance 105x80 mm | Wheel with roller bearing and grey rubber tyre with hardness 83 ° Shore A | Elegant trip, Grey rubber is non-marking and leaves no marks on the floor, rubber reduces the t

Product information

- Article code 2-954 ISO
- SKU 39644
- EAN 3838461396441

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)



Product description

standard Wheel with plain bearing and black rubber tyre with hardness 80 ° Shore A on polypropylene

Wheel diameter x width: 150 x 40 mm

Axle hole: 20 mm

Hub length: 58 mm

Approved and tested load capacity

Dynamic 170 kg

Static 210 kg

Temperature range:

Continous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

Advantages of this Smooth drive wheel wheel:


- ✓ wet floor
- ✓ reduces the transmission of both vibration and noise
- ✓ with low obstacles

LIV SYSTEMS standard transport wheel + black rubber tyre Ø150 x W40mm for 170kg Prod ID: 30253

ID 30253:standard Wheel with plain bearing and black rubber tyre with hardness 80 ° Shore A on polypropylene | Axle hole: 20 mm | Hub length: 58 mm | Smooth drive wheel, for wet floor, rubber reduces the transmission of both vibration and noise, perfect w

Product information

- Article code 2-945 ISO
- SKU 30253
- EAN 3838461302534



Product description

standard Swivel transport castor with an overall height of 180 mm

Wheel diameter x width: 150 x 40 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with plain bearing and black rubber tyre with hardness 80 ° Shore A on polypropylene.

Approved and tested load capacity

Dynamic 170 kg

Static 210 kg

Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

Advantages of this Smooth drive wheel Swivel transport castor:

- ✓ wet floor
- ✓ reduces the transmission of both vibration and noise
- ✓ with low obstacles

LIV SYSTEMS standard Swivel transport castor + black rubber tyre Ø150 x W40mm for 170kg Prod ID: 31134

ID 31134: Castor overall height 180 mm | 4 mounting holes with distance 105x80 mm | Wheel with plain bearing and black rubber tyre with hardness 80 ° Shore A | Smooth drive wheel, for wet floor, rubber reduces the transmission of both vibration and noise,

Product information


- Article code 2-924 ISO
- SKU 31134
- EAN 3838461311345

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)



Product description

standard Swivel transport castor with an overall height of 180 mm

Wheel diameter x width: 150 x 40 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with roller bearing and black rubber tyre with hardness 80 ° Shore A on polypropylene.

Approved and tested load capacity

Dynamic 170 kg

Static 210 kg

Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

Advantages of this Smooth drive wheel Swivel transport castor:

- ✓ wet floor
- ✓ reduces the transmission of both vibration and noise
- ✓ with low obstacles

LIV SYSTEMS standard Swivel transport castor + black rubber tyre Ø150 x W40mm for 170kg Prod ID: 31133

ID 31133: Castor overall height 180 mm | 4 mounting holes with distance 105x80 mm | Wheel with roller bearing and black rubber tyre with hardness 80 ° Shore A | Smooth drive wheel, for wet floor, rubber reduces the transmission of both vibration and noise

Product information


- Article code 2-917 ISO
- SKU 31133
- EAN 3838461311338

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)



Product description

standard Swivel transport castor with brake with an overall height of 180 mm

Wheel diameter x width: 150 x 40 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with plain bearing and black rubber tyre with hardness 80 ° Shore A on polypropylene

the double brake system, brakes the turning of the wheel and the swivel rotation.

Approved and tested load capacity

Dynamic 170 kg

Static 210 kg

Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

Advantages of this Smooth drive wheel Swivel transport castor with brake:

- ✓ wet floor
- ✓ reduces the transmission of both vibration and noise
- ✓ with low obstacles

LIV SYSTEMS standard Swivel transport castor with brake + black rubber tyre Ø150 x W40mm for 170kg Prod ID: 31214

ID 31214: Castor overall height 180 mm | 4 mounting holes with distance 105x80 mm | Wheel with plain bearing and black rubber tyre with hardness 80 ° Shore A | The double brake system, brakes the turning of the wheel and the swivel rotation. | Smooth driv

Product information

- Article code 2-938 ISO
- SKU 31214
- EAN 3838461312144

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)



Product description

standard Swivel transport castor with an overall height of 180 mm

Wheel diameter x width: 150 x 40 mm

Top plate with 4 mounting holes of #\$\$ mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 93 mm

Wheel with plain bearing and black rubber tyre with hardness 80 ° Shore A on polypropylene.

Approved and tested load capacity

Dynamic 170 kg

Static 210 kg

Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

Advantages of this Smooth drive wheel Swivel transport castor:

- ✓ wet floor
- ✓ reduces the transmission of both vibration and noise
- ✓ with low obstacles

LIV SYSTEMS standard Swivel transport castor + black rubber tyre Ø150 x W40mm for 170kg Prod ID: 31294

ID 31294: Castor overall height 180 mm | 4 mounting holes with distance #\$\$ mm | Wheel with plain bearing and black rubber tyre with hardness 80 ° Shore A | Smooth drive wheel, for wet floor, rubber reduces the transmission of both vibration and noise, pe

Product information

- Article code 2-975 ISO
- SKU 31294
- EAN 3838461312946



Product description

standard Swivel transport castor with an overall height of 180 mm

Wheel diameter x width: 150 x 40 mm

Top plate with 4 mounting holes of #\$\$ mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 93 mm

Wheel with roller bearing and black rubber tyre with hardness 80 ° Shore A on polypropylene.

Approved and tested load capacity

Dynamic 170 kg

Static 210 kg

Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

Advantages of this Smooth drive wheel Swivel transport castor:

- ✓ wet floor
- ✓ reduces the transmission of both vibration and noise
- ✓ with low obstacles

LIV SYSTEMS standard Swivel transport castor + black rubber tyre Ø150 x W40mm for 170kg Prod ID: 31293

ID 31293: Castor overall height 180 mm | 4 mounting holes with distance #\$\$ mm | Wheel with roller bearing and black rubber tyre with hardness 80 ° Shore A | Smooth drive wheel, for wet floor, rubber reduces the transmission of both vibration and noise, p

Product information

- Article code 2-968 ISO
- SKU 31293
- EAN 3838461312939



Product description

standard Swivel transport castor with brake with an overall height of 180 mm

Wheel diameter x width: 150 x 40 mm

Top plate with 4 mounting holes of #\$\$% mm, mounting hole distance #\$\$% mm and top plate outer dimensions: 93 mm

Wheel with plain bearing and black rubber tyre with hardness 80 ° Shore A on polypropylene the double brake system, brakes the turning of the wheel and the swivel rotation.

Approved and tested load capacity

Dynamic 170 kg

Static 210 kg

Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

Advantages of this Smooth drive wheel Swivel transport castor with brake:

- ✓ wet floor
- ✓ reduces the transmission of both vibration and noise
- ✓ with low obstacles

LIV SYSTEMS standard Swivel transport castor with brake + black rubber tyre Ø150 x W40mm for 170kg Prod ID: 31395

ID 31395: Castor overall height 180 mm | 4 mounting holes with distance #\$\$% mm | Wheel with plain bearing and black rubber tyre with hardness 80 ° Shore A | The double brake system, brakes the turning of the wheel and the swivel rotation. | Smooth drive w

Product information

- 
- Article code 2-989 ISO
 - SKU 31395
 - EAN 3838461313950



Product description

standard Swivel transport castor with brake with an overall height of 180 mm

Wheel diameter x width: 150 x 40 mm

Top plate with 4 mounting holes of #\$\$ mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 93 mm

Wheel with roller bearing and black rubber tyre with hardness 80 ° Shore A on polypropylene the double brake system, brakes the turning of the wheel and the swivel rotation.

Approved and tested load capacity

Dynamic 170 kg

Static 210 kg

Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

Advantages of this Smooth drive wheel Swivel transport castor with brake:


- ✓ wet floor
- ✓ reduces the transmission of both vibration and noise
- ✓ with low obstacles

LIV SYSTEMS standard Swivel transport castor with brake + black rubber tyre Ø150 x W40mm for 170kg Prod ID: 31393

ID 31393: Castor overall height 180 mm | 4 mounting holes with distance #\$\$ mm | Wheel with roller bearing and black rubber tyre with hardness 80 ° Shore A | The double brake system, brakes the turning of the wheel and the swivel rotation. | Smooth drive

Product information

- 
- Article code 2-982 ISO
 - SKU 31393
 - EAN 3838461313936

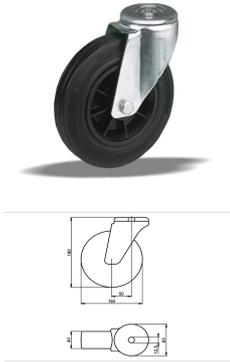

Product description

standard Swivel transport castor with an overall height of 180 mm

Wheel diameter x width: 150 x 40 mm

Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 93 mm

Wheel with plain bearing and black rubber tyre with hardness 80 ° Shore A on polypropylene.

Approved and tested load capacity

Dynamic 170 kg

Static 210 kg

Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

Advantages of this Smooth drive wheel Swivel transport castor:

- ✓ wet floor
- ✓ reduces the transmission of both vibration and noise
- ✓ with low obstacles

LIV SYSTEMS standard Swivel transport castor + black rubber tyre Ø150 x W40mm for 170kg Prod ID: 34154

ID 34154: Castor overall height 180 mm | 4 mounting holes with distance #\$\$ mm | Wheel with plain bearing and black rubber tyre with hardness 80 ° Shore A | Smooth drive wheel, for wet floor, rubber reduces the transmission of both vibration and noise, pe

Product information


- Article code 2-975 L12
- SKU 34154
- EAN 3838461341540

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

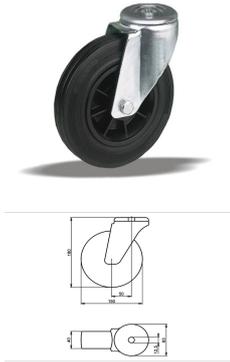

Product description

standard Swivel transport castor with an overall height of 180 mm

Wheel diameter x width: 150 x 40 mm

Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 93 mm

Wheel with roller bearing and black rubber tyre with hardness 80 ° Shore A on polypropylene.

Approved and tested load capacity

Dynamic 170 kg

Static 210 kg

Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

Advantages of this Smooth drive wheel Swivel transport castor:

- ✓ wet floor
- ✓ reduces the transmission of both vibration and noise
- ✓ with low obstacles

LIV SYSTEMS standard Swivel transport castor + black rubber tyre Ø150 x W40mm for 170kg Prod ID: 34153

ID 34153: Castor overall height 180 mm | 4 mounting holes with distance #\$\$ mm | Wheel with roller bearing and black rubber tyre with hardness 80 ° Shore A | Smooth drive wheel, for wet floor, rubber reduces the transmission of both vibration and noise, p

Product information


- Article code 2-982 L12
- SKU 34153
- EAN 3838461341533

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)



Product description

standard Swivel transport castor with brake with an overall height of 180 mm

Wheel diameter x width: 150 x 40 mm

Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 93 mm

Wheel with plain bearing and black rubber tyre with hardness 80 ° Shore A on polypropylene

the double brake system, brakes the turning of the wheel and the swivel rotation.

Approved and tested load capacity

Dynamic 170 kg

Static 210 kg

Temperature range:

Continious operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

Advantages of this Smooth drive wheel Swivel transport castor with brake:

- ✓ wet floor
- ✓ reduces the transmission of both vibration and noise
- ✓ with low obstacles

LIV SYSTEMS standard Swivel transport castor with brake + black rubber tyre Ø150 x W40mm for 170kg Prod ID: 34224

ID 34224: Castor overall height 180 mm | 4 mounting holes with distance #\$\$ mm | Wheel with plain bearing and black rubber tyre with hardness 80 ° Shore A | The double brake system, brakes the turning of the wheel and the swivel rotation. | Smooth drive w

Product information


- Article code 2-989 L12
- SKU 34224
- EAN 3838461342240

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)



Product description

standard Swivel transport castor with brake with an overall height of 180 mm

Wheel diameter x width: 150 x 40 mm

Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 93 mm

Wheel with roller bearing and black rubber tyre with hardness 80 ° Shore A on polypropylene

the double brake system, brakes the turning of the wheel and the swivel rotation.

Approved and tested load capacity

Dynamic 170 kg

Static 210 kg

Temperature range:

Continious operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

Advantages of this Smooth drive wheel Swivel transport castor with brake:

- ✓ wet floor
- ✓ reduces the transmission of both vibration and noise
- ✓ with low obstacles

LIV SYSTEMS standard Swivel transport castor with brake + black rubber tyre Ø150 x W40mm for 170kg Prod ID: 34223

ID 34223: Castor overall height 180 mm | 4 mounting holes with distance #\$\$ mm | Wheel with roller bearing and black rubber tyre with hardness 80 ° Shore A | The double brake system, brakes the turning of the wheel and the swivel rotation. | Smooth drive

Product information


- Article code 2-982 L12
- SKU 34223
- EAN 3838461342233

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

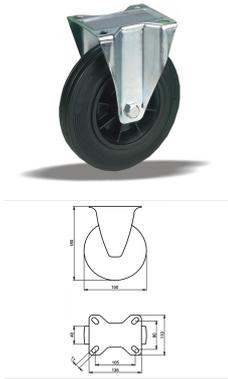

Product description

standard fixed transport castor with an overall height of 180 mm

Wheel diameter x width: 150 x 40 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with plain bearing and black rubber tyre with hardness 80 ° Shore A on polypropylene.

Approved and tested load capacity

Dynamic 170 kg

Static 210 kg

Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

Advantages of this Smooth drive wheel fixed transport castor:

- ✓ wet floor
- ✓ reduces the transmission of both vibration and noise
- ✓ with low obstacles

LIV SYSTEMS standard fixed transport castor + black rubber tyre Ø150 x W40mm for 170kg Prod ID: 31494

ID 31494: Castor overall height 180 mm | 4 mounting holes with distance 105x80 mm | Wheel with plain bearing and black rubber tyre with hardness 80 ° Shore A | Smooth drive wheel, for wet floor, rubber reduces the transmission of both vibration and noise,

Product information


- Article code 2-961 ISO
- SKU 31494
- EAN 3838461314940

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

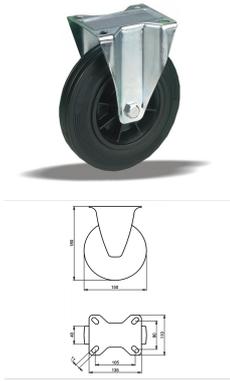

Product description

standard fixed transport castor with an overall height of 180 mm

Wheel diameter x width: 150 x 40 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with roller bearing and black rubber tyre with hardness 80 ° Shore A on polypropylene.

Approved and tested load capacity

Dynamic 170 kg

Static 210 kg

Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

Advantages of this Smooth drive wheel fixed transport castor:

- ✓ wet floor
- ✓ reduces the transmission of both vibration and noise
- ✓ with low obstacles

LIV SYSTEMS standard fixed transport castor + black rubber tyre Ø150 x W40mm for 170kg Prod ID: 31493

ID 31493: Castor overall height 180 mm | 4 mounting holes with distance 105x80 mm | Wheel with roller bearing and black rubber tyre with hardness 80 ° Shore A | Smooth drive wheel, for wet floor, rubber reduces the transmission of both vibration and noise

Product information

- Article code 2-954 ISO
- SKU 31493
- EAN 3838461314933

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)



Product description

standard Wheel with plain bearing and black rubber tyre with hardness 80 ° Shore A on steel rim with electrogalvanization zinc plating anti-corrosion protection Cr6-free

Wheel diameter x width: 150 x 40 mm

Axle hole: 20 mm

Hub length: 58 mm

Approved and tested load capacity

Dynamic 170 kg

Static 210 kg

Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

Advantages of this Comfortable drive wheel:


- ✓ to manoeuvre
- ✓ performance on uneven floor or obstacles
- ✓ and strong wheel systems

LIV SYSTEMS standard transport wheel + black rubber tyre Ø150 x W40mm for 170kg Prod ID: 61876

ID 61876: standard Wheel with plain bearing and black rubber tyre with hardness 80 ° Shore A on steel rim with electrogalvanization zinc plating anti-corrosion protection Cr6-free | Axle hole: 20 mm | Hub length: 58 mm | Comfortable drive, easy to manoeuvre

Product information

- Article code 2-339 ISO
- SKU 61876
- EAN 3838461618765



Product description

standard Swivel transport castor with an overall height of 180 mm

Wheel diameter x width: 150 x 40 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with plain bearing and black rubber tyre with hardness 80 ° Shore A on steel rim with electrogalvanization zinc plating anti-corrosion protection Cr6-free.

Approved and tested load capacity

Dynamic 170 kg

Static 210 kg

Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

Advantages of this Comfortable drive Swivel transport castor:

- ✓ to manoeuvre
- ✓ performance on uneven floor or obstacles
- ✓ and strong wheel systems

LIV SYSTEMS standard Swivel transport castor + black rubber tyre Ø150 x W40mm for 170kg Prod ID: 62392

ID 62392: Castor overall height 180 mm | 4 mounting holes with distance 105x80 mm | Wheel with plain bearing and black rubber tyre with hardness 80 ° Shore A | Comfortable drive, easy to manoeuvre, good performance on uneven floor or obstacles, robust and

Product information


- Article code 2-348 ISO
- SKU 62392
- EAN 3838461623929

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)



Product description

standard Swivel transport castor with an overall height of 180 mm

Wheel diameter x width: 150 x 40 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with roller bearing and black rubber tyre with hardness 80 ° Shore A on steel rim with electrogalvanization zinc plating anti-corrosion protection Cr6-free.

Approved and tested load capacity

Dynamic 170 kg

Static 210 kg

Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

Advantages of this Comfortable drive Swivel transport castor:

- ✓ to manoeuvre
- ✓ performance on uneven floor or obstacles
- ✓ and strong wheel systems

LIV SYSTEMS standard Swivel transport castor + black rubber tyre Ø150 x W40mm for 170kg Prod ID: 55356

ID 55356: Castor overall height 180 mm | 4 mounting holes with distance 105x80 mm | Wheel with roller bearing and black rubber tyre with hardness 80 ° Shore A | Comfortable drive, easy to manoeuvre, good performance on uneven floor or obstacles, robust an

Product information


- Article code 2-426 A
- SKU 55356
- EAN 3838461553561

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)



Product description

standard Swivel transport castor with brake with an overall height of 180 mm

Wheel diameter x width: 150 x 40 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with plain bearing and black rubber tyre with hardness 80 ° Shore A on steel rim with electrogalvanization zinc plating anti-corrosion protection Cr6-free the double brake system, brakes the turning of the wheel and the swivel rotation.

Approved and tested load capacity

Dynamic 170 kg

Static 210 kg

Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

Advantages of this Comfortable drive Swivel transport castor with brake:

- ✓ to manoeuvre
- ✓ performance on uneven floor or obstacles
- ✓ and strong wheel systems

LIV SYSTEMS standard Swivel transport castor with brake + black rubber tyre Ø150 x W40mm for 170kg Prod ID: 30323

ID 30323: Castor overall height 180 mm | 4 mounting holes with distance 105x80 mm | Wheel with plain bearing and black rubber tyre with hardness 80 ° Shore A | The double brake system, brakes the turning of the wheel and the swivel rotation. | Comfortable

Product information


- Article code 2-624 A
- SKU 30323
- EAN 3838461303234

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)



Product description

standard Swivel transport castor with brake with an overall height of 180 mm

Wheel diameter x width: 150 x 40 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with roller bearing and black rubber tyre with hardness 80 ° Shore A on steel rim with electrogalvanization zinc plating anti-corrosion protection Cr6-free the double brake system, brakes the turning of the wheel and the swivel rotation.

Approved and tested load capacity

Dynamic 170 kg

Static 210 kg

Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

Advantages of this Comfortable drive Swivel transport castor with brake:

- ✓ to manoeuvre
- ✓ performance on uneven floor or obstacles
- ✓ and strong wheel systems

LIV SYSTEMS standard Swivel transport castor with brake + black rubber tyre Ø150 x W40mm for 170kg Prod ID: 30314

ID 30314: Castor overall height 180 mm | 4 mounting holes with distance 105x80 mm | Wheel with roller bearing and black rubber tyre with hardness 80 ° Shore A | The double brake system, brakes the turning of the wheel and the swivel rotation. | Comfortabl

Product information

- Article code 2-426 A
- SKU 30314
- EAN 3838461303142

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)



Product description

standard Swivel transport castor with an overall height of 180 mm

Wheel diameter x width: 150 x 40 mm

Top plate with 4 mounting holes of #\$\$ mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 93 mm

Wheel with plain bearing and black rubber tyre with hardness 80 ° Shore A on steel rim with electrogalvanization zinc plating anti-corrosion protection Cr6-free.

Approved and tested load capacity

Dynamic 170 kg

Static 210 kg

Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

Advantages of this Comfortable drive Swivel transport castor:

- ✓ to manoeuvre
- ✓ performance on uneven floor or obstacles
- ✓ and strong wheel systems

LIV SYSTEMS standard Swivel transport castor + black rubber tyre Ø150 x W40mm for 170kg Prod ID: 65144

ID 65144: Castor overall height 180 mm | 4 mounting holes with distance #\$\$ mm | Wheel with plain bearing and black rubber tyre with hardness 80 ° Shore A | Comfortable drive, easy to manoeuvre, good performance on uneven floor or obstacles, robust and st

Product information

- 
- Article code 2-357
 - SKU 65144
 - EAN 3838461651441



Product description

standard Swivel transport castor with an overall height of 180 mm

Wheel diameter x width: 150 x 40 mm

Top plate with 4 mounting holes of #\$\$ mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 93 mm

Wheel with roller bearing and black rubber tyre with hardness 80 ° Shore A on steel rim with electrogalvanization zinc plating anti-corrosion protection Cr6-free.

Approved and tested load capacity

Dynamic 170 kg

Static 210 kg

Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

Advantages of this Comfortable drive Swivel transport castor:

- ✓ to manoeuvre
- ✓ performance on uneven floor or obstacles
- ✓ and strong wheel systems

LIV SYSTEMS standard Swivel transport castor + black rubber tyre Ø150 x W40mm for 170kg Prod ID: 65142

ID 65142: Castor overall height 180 mm | 4 mounting holes with distance #\$\$ mm | Wheel with roller bearing and black rubber tyre with hardness 80 ° Shore A | Comfortable drive, easy to manoeuvre, good performance on uneven floor or obstacles, robust and s

Product information

- 
- Article code 2-631
 - SKU 65142
 - EAN 3838461651427



Product description

standard Swivel transport castor with brake with an overall height of 180 mm

Wheel diameter x width: 150 x 40 mm

Top plate with 4 mounting holes of #\$\$ mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 93 mm

Wheel with plain bearing and black rubber tyre with hardness 80 ° Shore A on steel rim with electrogalvanization zinc plating anti-corrosion protection Cr6-free

the double brake system, brakes the turning of the wheel and the swivel rotation.

Approved and tested load capacity

Dynamic 170 kg

Static 210 kg

Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

Advantages of this Comfortable drive Swivel transport castor with brake:

- ✓ to manoeuvre
- ✓ performance on uneven floor or obstacles
- ✓ and strong wheel systems

LIV SYSTEMS standard Swivel transport castor with brake + black rubber tyre Ø150 x W40mm for 170kg Prod ID: 30403

ID 30403: Castor overall height 180 mm | 4 mounting holes with distance #\$\$ mm | Wheel with plain bearing and black rubber tyre with hardness 80 ° Shore A | The double brake system, brakes the turning of the wheel and the swivel rotation. | Comfortable dr

Product information



- Article code 2-597 A
- SKU 30403
- EAN 3838461304033



Product description

standard Swivel transport castor with brake with an overall height of 180 mm

Wheel diameter x width: 150 x 40 mm

Top plate with 4 mounting holes of #\$\$ mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 93 mm

Wheel with roller bearing and black rubber tyre with hardness 80 ° Shore A on steel rim with electrogalvanization zinc plating anti-corrosion protection Cr6-free

the double brake system, brakes the turning of the wheel and the swivel rotation.

Approved and tested load capacity

Dynamic 170 kg

Static 210 kg

Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

Advantages of this Comfortable drive Swivel transport castor with brake:

- ✓ to manoeuvre
- ✓ performance on uneven floor or obstacles
- ✓ and strong wheel systems


LIV SYSTEMS standard Swivel transport castor with brake + black rubber tyre Ø150 x W40mm for 170kg Prod ID: 30395

ID 30395: Castor overall height 180 mm | 4 mounting holes with distance #\$\$ mm | Wheel with roller bearing and black rubber tyre with hardness 80 ° Shore A | The double brake system, brakes the turning of the wheel and the swivel rotation. | Comfortable d

Product information



- Article code 2-609 A
- SKU 30395
- EAN 3838461303951

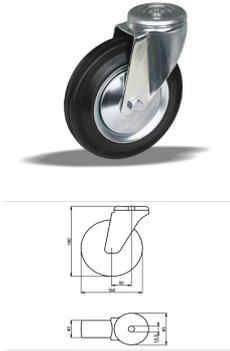

Product description

standard Swivel transport castor with an overall height of 180 mm

Wheel diameter x width: 150 x 40 mm

Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 93 mm

Wheel with plain bearing and black rubber tyre with hardness 80 ° Shore A on steel rim with electrogalvanization zinc plating anti-corrosion protection Cr6-free.

Approved and tested load capacity

Dynamic 170 kg

Static 210 kg

Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

Advantages of this Comfortable drive Swivel transport castor:

- ✓ to manoeuvre
- ✓ performance on uneven floor or obstacles
- ✓ and strong wheel systems

LIV SYSTEMS standard Swivel transport castor + black rubber tyre Ø150 x W40mm for 170kg Prod ID: 34033

ID 34033: Castor overall height 180 mm | 4 mounting holes with distance #\$\$ mm | Wheel with plain bearing and black rubber tyre with hardness 80 ° Shore A | Comfortable drive, easy to manoeuvre, good performance on uneven floor or obstacles, robust and st

Product information


- Article code 2-357 L12
- SKU 34033
- EAN 3838461340338

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

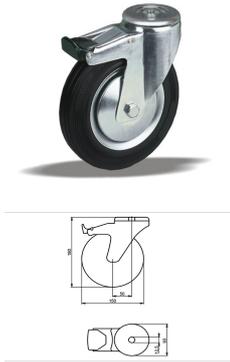

Product description

standard Swivel transport castor with brake with an overall height of 180 mm

Wheel diameter x width: 150 x 40 mm

Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 93 mm

Wheel with plain bearing and black rubber tyre with hardness 80 ° Shore A on steel rim with electrogalvanization zinc plating anti-corrosion protection Cr6-free the double brake system, brakes the turning of the wheel and the swivel rotation.

Approved and tested load capacity

Dynamic 170 kg

Static 210 kg

Temperature range:

Continious operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

Advantages of this Comfortable drive Swivel transport castor with brake:

- ✓ to manoeuvre
- ✓ performance on uneven floor or obstacles
- ✓ and strong wheel systems

LIV SYSTEMS standard Swivel transport castor with brake + black rubber tyre Ø150 x W40mm for 170kg Prod ID: 34085

ID 34085: Castor overall height 180 mm | 4 mounting holes with distance #\$\$ mm | Wheel with plain bearing and black rubber tyre with hardness 80 ° Shore A | The double brake system, brakes the turning of the wheel and the swivel rotation. | Comfortable dr

Product information


- Article code 2-597 L12
- SKU 34085
- EAN 3838461340857

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

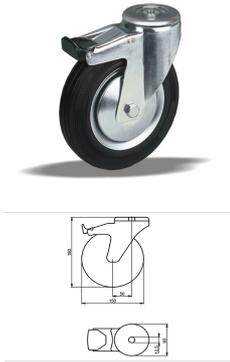

Product description

standard Swivel transport castor with brake with an overall height of 180 mm

Wheel diameter x width: 150 x 40 mm

Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 93 mm

Wheel with roller bearing and black rubber tyre with hardness 80 ° Shore A on steel rim with electrogalvanization zinc plating anti-corrosion protection Cr6-free the double brake system, brakes the turning of the wheel and the swivel rotation.

Approved and tested load capacity

Dynamic 170 kg

Static 210 kg

Temperature range:

Continious operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

Advantages of this Comfortable drive Swivel transport castor with brake:

- ✓ to manoeuvre
- ✓ performance on uneven floor or obstacles
- ✓ and strong wheel systems

LIV SYSTEMS standard Swivel transport castor with brake + black rubber tyre Ø150 x W40mm for 170kg Prod ID: 34084

ID 34084: Castor overall height 180 mm | 4 mounting holes with distance #\$\$ mm | Wheel with roller bearing and black rubber tyre with hardness 80 ° Shore A | The double brake system, brakes the turning of the wheel and the swivel rotation. | Comfortable d

Product information


- Article code 2-609 L12
- SKU 34084
- EAN 3838461340840

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

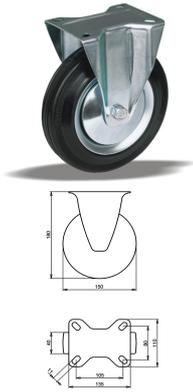

Product description

standard fixed transport castor with an overall height of 180 mm

Wheel diameter x width: 150 x 40 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with plain bearing and black rubber tyre with hardness 80 ° Shore A on steel rim with electrogalvanization zinc plating anti-corrosion protection Cr6-free.

Approved and tested load capacity

Dynamic 170 kg

Static 210 kg

Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

Advantages of this Comfortable drive fixed transport castor:

- ✓ to manoeuvre
- ✓ performance on uneven floor or obstacles
- ✓ and strong wheel systems

LIV SYSTEMS standard fixed transport castor + black rubber tyre Ø150 x W40mm for 170kg Prod ID: 62402

ID 62402: Castor overall height 180 mm | 4 mounting holes with distance 105x80 mm | Wheel with plain bearing and black rubber tyre with hardness 80 ° Shore A | Comfortable drive, easy to manoeuvre, good performance on uneven floor or obstacles, robust and

Product information


- Article code 2-280 ISO
- SKU 62402
- EAN 3838461624025

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

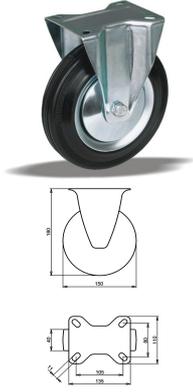

Product description

standard fixed transport castor with an overall height of 180 mm

Wheel diameter x width: 150 x 40 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with roller bearing and black rubber tyre with hardness 80 ° Shore A on steel rim with electrogalvanization zinc plating anti-corrosion protection Cr6-free.

Approved and tested load capacity

Dynamic 170 kg

Static 210 kg

Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

Advantages of this Comfortable drive fixed transport castor:

- ✓ to manoeuvre
- ✓ performance on uneven floor or obstacles
- ✓ and strong wheel systems

LIV SYSTEMS standard fixed transport castor + black rubber tyre Ø150 x W40mm for 170kg Prod ID: 55359

ID 55359: Castor overall height 180 mm | 4 mounting holes with distance 105x80 mm | Wheel with roller bearing and black rubber tyre with hardness 80 ° Shore A | Comfortable drive, easy to manoeuvre, good performance on uneven floor or obstacles, robust an

Product information

- Article code 2-424 ISO
- SKU 55359
- EAN 3838461553592

Алматы (7273)495-231
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чеховсары (8352)28-53-07
Челябинск (351)202-03-61
Ставрополь (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(7172)727-132

Киргизия +996(312)96-26-47

<https://liv.nt-rt.ru/> || vis@nt-rt.ru