

Алматы (7273)495-231
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижегород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35


Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(7172)727-132

Киргизия +996(312)96-26-47

<https://liv.nt-rt.ru/> || vis@nt-rt.ru

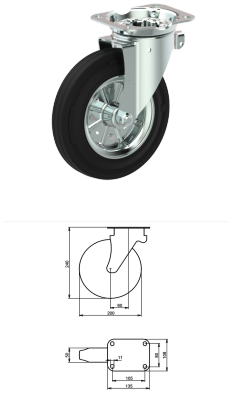

Product description

waste bin castors Swivel castor with an overall height of 240 mm

Wheel diameter x width: 200 x 50 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x108 mm

Wheel with plain bearing and black rubber tyre with hardness 80 ° Shore A on steel rim with electrogalvanization zinc plating anti-corrosion protection Cr6-free.

Approved and tested load capacity

Dynamic 250 kg

Static 310 kg

Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

Advantages of this Container floor power Swivel castor:

- ✓ diverse weather conditions
- ✓ robust handling
- ✓ lifetime

LIV SYSTEMS waste bin castors Swivel castor + black rubber tyre Ø200 x W50mm for 250kg Prod ID: 44341


ID 44341: Castor overall height 240 mm | 4 mounting holes with distance 105x80 mm | Wheel with plain bearing and black rubber tyre with hardness 80 ° Shore A | Container floor power, for diverse weather conditions, for robust handling, long lifetime

Product information

- Article code 2-020-G11
- SKU 44341
- EAN 3838461443411

Specifications

The result of our quality is maximum performance!



Product description

waste bin castors Swivel castor with an overall height of 200 mm

Wheel diameter x width: 160 x 40 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x108 mm

Wheel with plain bearing and black rubber tyre with hardness 80 ° Shore A on polypropylene.

Approved and tested load capacity

Dynamic 200 kg

Static 250 kg

Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

Advantages of this Container stand and roll Swivel castor:

- ✓ and humid surroundings
- ✓ through the obstacles
- ✓ handling

LIV SYSTEMS waste bin castors Swivel castor + black rubber tyre Ø160 x W40mm for 200kg Prod ID: 44336


ID 44336: Castor overall height 200 mm | 4 mounting holes with distance 105x80 mm | Wheel with plain bearing and black rubber tyre with hardness 80 ° Shore A | Container stand and roll, wet and humid surroundings, get through the obstacles, easy handling

Product information

- Article code 2-020-G13
- SKU 44791
- EAN 3838461447914

Specifications

The result of our quality is maximum performance!

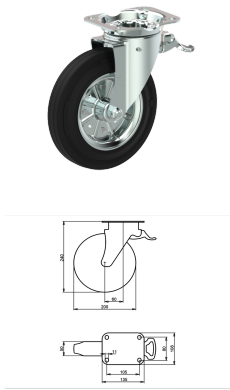

Product description

waste bin castors Swivel castor with brake with an overall height of 240 mm

Wheel diameter x width: 200 x 50 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x108 mm

Wheel with roller bearing and black rubber tyre with hardness 80 ° Shore A on steel rim with electrogalvanization zinc plating anti-corrosion protection Cr6-free the double brake system, brakes the turning of the wheel and the swivel rotation.

Approved and tested load capacity

Dynamic 250 kg

Static 310 kg

Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

Advantages of this Container floor power Swivel castor with brake:

- ✓ diverse weather conditions
- ✓ robust handling
- ✓ lifetime

LIV SYSTEMS waste bin castors Swivel castor with brake + black rubber tyre Ø200 x W50mm for 250kg Prod ID: 44792


ID 44792: Castor overall height 240 mm | 4 mounting holes with distance 105x80 mm | Wheel with roller bearing and black rubber tyre with hardness 80 ° Shore A | The double brake system, brakes the turning of the wheel and the swivel rotation. | Container

Product information

- Article code 2-020-Z14
- SKU 44792
- EAN 3838461447921

Specifications

The result of our quality is maximum performance!



Product description

waste bin castors Swivel castor with an overall height of 240 mm

Wheel diameter x width: 200 x 50 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x108 mm

Wheel with plain bearing and black rubber tyre with hardness 80 ° Shore A on polypropylene.

Approved and tested load capacity

Dynamic 250 kg

Static 310 kg

Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

Advantages of this Container stand and roll Swivel castor:

- ✓ and humid surroundings
- ✓ through the obstacles
- ✓ handling

LIV SYSTEMS waste bin castors Swivel castor + black rubber tyre Ø200 x W50mm for 250kg Prod ID: 44761

ID 44761: Castor overall height 240 mm | 4 mounting holes with distance 105x80 mm | Wheel with plain bearing and black rubber tyre with hardness 80 ° Shore A | Container stand and roll, wet and humid surroundings, get through the obstacles, easy handling

Product information

- Article code 2-020-G12
- SKU 44761
- EAN 3838461447617

Specifications

The result of our quality is maximum performance!



Product description

waste bin castors Wheel with plain bearing and rubber tyre with hardness 80 ° Shore A on polypropylene

Wheel diameter x width: 200 x 50 mm

Axle hole: 22 mm

Hub length: mm

Approved and tested load capacity

Dynamic 160 kg

Static 200 kg

Temperature range:

Continous operation: #\$\$°C

Short (10 min) exposure: #\$\$°C

Advantages of this Container stand and roll wheel:

- ✓ and humid surroundings
- ✓ throughg the obstacles
- ✓ handling

LIV SYSTEMS waste bin castors wheel + rubber tyre Ø200 x W50mm for 160kg Prod ID: 68947


ID 68947:waste bin castors Wheel with plain bearing and rubber tyre with hardness 80 ° Shore A on polypropylene |

Axle hole: 22 mm | Hub length: mm | Container stand and roll, wet and humid surroundings, get throughg the obstacles, easy handling

Product information

- Article code 2-949
- SKU 68947
- EAN 3838461689475

Specifications

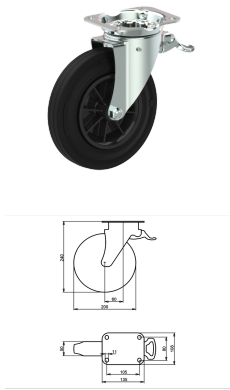

Product description

waste bin castors Swivel castor with brake with an overall height of 240 mm

Wheel diameter x width: 200 x 50 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x108 mm

Wheel with plain bearing and black rubber tyre with hardness 80 ° Shore A on polypropylene

the double brake system, brakes the turning of the wheel and the swivel rotation.

Approved and tested load capacity

Dynamic 250 kg

Static 310 kg

Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

Advantages of this Container stand and roll Swivel castor with brake:

- ✓ and humid surroundings
- ✓ through the obstacles
- ✓ handling

LIV SYSTEMS waste bin castors Swivel castor with brake + black rubber tyre Ø200 x W50mm for 250kg Prod ID: 44762


ID 44762: Castor overall height 240 mm | 4 mounting holes with distance 105x80 mm | Wheel with plain bearing and black rubber tyre with hardness 80 ° Shore A | The double brake system, brakes the turning of the wheel and the swivel rotation. | Container s

Product information

- Article code 2-020-Z12
- SKU 44762
- EAN 3838461447624

Specifications

The result of our quality is maximum performance!



Product description

waste bin castors Swivel castor with brake with an overall height of 240 mm

Wheel diameter x width: 200 x 50 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x108 mm

Wheel with plain bearing and black rubber tyre with hardness 80 ° Shore A on steel rim with electrogalvanization zinc plating anti-corrosion protection Cr6-free the double brake system, brakes the turning of the wheel and the swivel rotation.

Approved and tested load capacity

Dynamic 250 kg

Static 310 kg

Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

Advantages of this Container floor power Swivel castor with brake:

- ✓ diverse weather conditions
- ✓ robust handling
- ✓ lifetime

LIV SYSTEMS waste bin castors Swivel castor with brake + black rubber tyre Ø200 x W50mm for 250kg Prod ID: 44343


ID 44343: Castor overall height 240 mm | 4 mounting holes with distance 105x80 mm | Wheel with plain bearing and black rubber tyre with hardness 80 ° Shore A | The double brake system, brakes the turning of the wheel and the swivel rotation. | Container f

Product information

- Article code 2-020-Z11
- SKU 44343
- EAN 3838461443435

Specifications

The result of our quality is maximum performance!



Product description

waste bin castors Swivel castor with an overall height of 240 mm

Wheel diameter x width: 200 x 50 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x108 mm

Wheel with roller bearing and black rubber tyre with hardness 80 ° Shore A on steel rim with electrogalvanization zinc plating anti-corrosion protection Cr6-free.

Approved and tested load capacity

Dynamic 250 kg

Static 310 kg

Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

Advantages of this Container floor power Swivel castor:

- ✓ diverse weather conditions
- ✓ robust handling
- ✓ lifetime

LIV SYSTEMS waste bin castors Swivel castor + black rubber tyre Ø200 x W50mm for 250kg Prod ID: 44790


ID 44790: Castor overall height 240 mm | 4 mounting holes with distance 105x80 mm | Wheel with roller bearing and black rubber tyre with hardness 80 ° Shore A | Container floor power, for diverse weather conditions, for robust handling, long lifetime

Product information

- Article code 2-020-G14
- SKU 44790
- EAN 3838461447907

Specifications

The result of our quality is maximum performance!

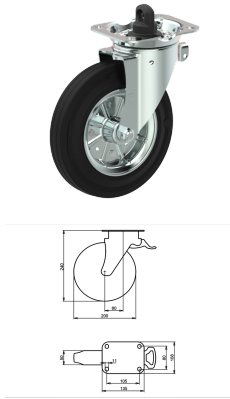

Product description

waste bin castors Swivel castor with brake with an overall height of 240 mm

Wheel diameter x width: 200 x 50 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x108 mm

Wheel with plain bearing and black rubber tyre with hardness 80 ° Shore A on steel rim with electrogalvanization zinc plating anti-corrosion protection Cr6-free.

Approved and tested load capacity

Dynamic 250 kg

Static 310 kg

Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

Advantages of this Container floor power Swivel castor with brake:

- ✓ diverse weather conditions
- ✓ robust handling
- ✓ lifetime

LIV SYSTEMS waste bin castors Swivel castor with brake + black rubber tyre Ø200 x W50mm for 250kg Prod ID: 44345


ID 44345: Castor overall height 240 mm | 4 mounting holes with distance 105x80 mm | Wheel with plain bearing and black rubber tyre with hardness 80 ° Shore A | Container floor power, for diverse weather conditions, for robust handling, long lifetime

Product information

- Article code 2-020-C11
- SKU 44345
- EAN 3838461443459

Specifications

The result of our quality is maximum performance!

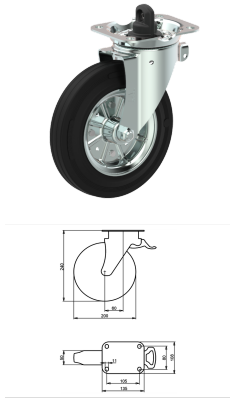

Product description

waste bin castors Swivel castor with brake with an overall height of 240 mm

Wheel diameter x width: 200 x 50 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x108 mm

Wheel with roller bearing and black rubber tyre with hardness 80 ° Shore A on steel rim with electrogalvanization zinc plating anti-corrosion protection Cr6-free.

Approved and tested load capacity

Dynamic 250 kg

Static 310 kg

Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

Advantages of this Container floor power Swivel castor with brake:

- ✓ diverse weather conditions
- ✓ robust handling
- ✓ lifetime

LIV SYSTEMS waste bin castors Swivel castor with brake + black rubber tyre Ø200 x W50mm for 250kg Prod ID: 44794


ID 44794: Castor overall height 240 mm | 4 mounting holes with distance 105x80 mm | Wheel with roller bearing and black rubber tyre with hardness 80 ° Shore A | Container floor power, for diverse weather conditions, for robust handling, long lifetime

Product information

- Article code 2-020-C14
- SKU 44794
- EAN 3838461447945

Specifications

The result of our quality is maximum performance!

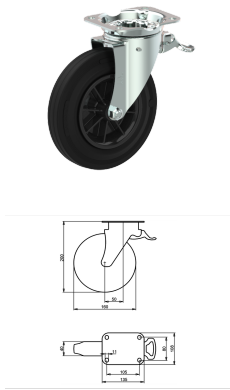

Product description

waste bin castors Swivel castor with brake with an overall height of 200 mm

Wheel diameter x width: 160 x 40 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x108 mm

Wheel with roller bearing and black rubber tyre with hardness 80 ° Shore A on polypropylene
the double brake system, brakes the turning of the wheel and the swivel rotation.

Approved and tested load capacity

Dynamic 200 kg

Static 250 kg

Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

Advantages of this Container stand and roll Swivel castor with brake:

- ✓ and humid surroundings
- ✓ through the obstacles
- ✓ handling

LIV SYSTEMS waste bin castors Swivel castor with brake + black rubber tyre Ø160 x W40mm for 200kg Prod ID: 44781


ID 44781: Castor overall height 200 mm | 4 mounting holes with distance 105x80 mm | Wheel with roller bearing and black rubber tyre with hardness 80 ° Shore A | The double brake system, brakes the turning of the wheel and the swivel rotation. | Container

Product information

- Article code 2-020-Z13
- SKU 44793
- EAN 3838461447938

Specifications

The result of our quality is maximum performance!

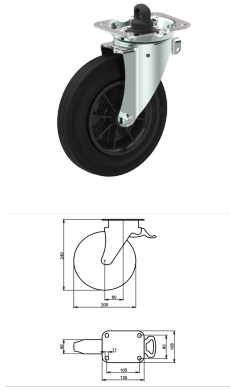

Product description

waste bin castors Swivel castor with brake with an overall height of 240 mm

Wheel diameter x width: 200 x 50 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x108 mm

Wheel with plain bearing and black rubber tyre with hardness 80 ° Shore A on polypropylene.

Approved and tested load capacity

Dynamic 250 kg

Static 310 kg

Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

Advantages of this Container stand and roll Swivel castor with brake:

- ✓ and humid surroundings
- ✓ through the obstacles
- ✓ handling

LIV SYSTEMS waste bin castors Swivel castor with brake + black rubber tyre Ø200 x W50mm for 250kg Prod ID: 44763


ID 44763: Castor overall height 240 mm | 4 mounting holes with distance 105x80 mm | Wheel with plain bearing and black rubber tyre with hardness 80 ° Shore A | Container stand and roll, wet and humid surroundings, get through the obstacles, easy handling

Product information

- Article code 2-020-C12
- SKU 44763
- EAN 3838461447631

Specifications

The result of our quality is maximum performance!

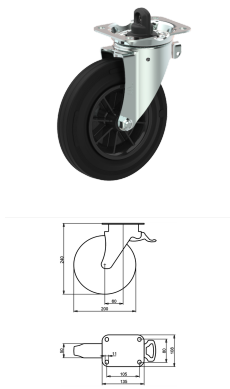

Product description

waste bin castors Swivel castor with brake with an overall height of 240 mm

Wheel diameter x width: 200 x 50 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x108 mm

Wheel with roller bearing and black rubber tyre with hardness 80 ° Shore A on polypropylene.

Approved and tested load capacity

Dynamic 250 kg

Static 310 kg

Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

Advantages of this Container stand and roll Swivel castor with brake:

- ✓ and humid surroundings
- ✓ through the obstacles
- ✓ handling

LIV SYSTEMS waste bin castors Swivel castor with brake + black rubber tyre Ø200 x W50mm for 250kg Prod ID: 44795

ID 44795: Castor overall height 240 mm | 4 mounting holes with distance 105x80 mm | Wheel with roller bearing and black rubber tyre with hardness 80 ° Shore A | Container stand and roll, wet and humid surroundings, get through the obstacles, easy handling

Product information

- Article code 2-020-C13
- SKU 44795
- EAN 3838461447952

Specifications

The result of our quality is maximum performance!

Алматы (7273)495-231
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Орел (4862)44-53-42
Омск (3812)21-46-40
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(7172)727-132

Киргизия +996(312)96-26-47

<https://liv.nt-rt.ru/> || vis@nt-rt.ru