

Алматы (7273)495-231  
Ангарск (3955)60-70-56  
Архангельск (8182)63-90-72  
Астрахань (8512)99-46-04  
Барнаул (3852)73-04-60  
Белгород (4722)40-23-64  
Благовещенск (4162)22-76-07  
Брянск (4832)59-03-52  
Владивосток (423)249-28-31  
Владикавказ (8672)28-90-48  
Владимир (4922)49-43-18  
Волгоград (844)278-03-48  
Вологда (8172)26-41-59  
Воронеж (473)204-51-73  
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06  
Ижевск (3412)26-03-58  
Иркутск (395)279-98-46  
Казань (843)206-01-48  
Калининград (4012)72-03-81  
Калуга (4842)92-23-67  
Кемерово (3842)65-04-62  
Киров (8332)68-02-04  
Коломна (4966)23-41-49  
Кострома (4942)77-07-48  
Краснодар (861)203-40-90  
Красноярск (391)204-63-61  
Курск (4712)77-13-04  
Курган (3522)50-90-47  
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13  
Москва (495)268-04-70  
Мурманск (8152)59-64-93  
Набережные Челны (8552)20-53-41  
Нижний Новгород (831)429-08-12  
Новокузнецк (3843)20-46-81  
Ноябрьск (3496)41-32-12  
Новосибирск (383)227-86-73  
Омск (3812)21-46-40  
Орел (4862)44-53-42  
Оренбург (3532)37-68-04  
Пенза (8412)22-31-16  
Петрозаводск (8142)55-98-37  
Псков (8112)59-10-37  
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15  
Рязань (4912)46-61-64  
Самара (846)206-03-16  
Санкт-Петербург (812)309-46-40  
Саратов (845)249-38-78  
Севастополь (8692)22-31-93  
Саранск (8342)22-96-24  
Симферополь (3652)67-13-56  
Смоленск (4812)29-41-54  
Сочи (862)225-72-31  
Ставрополь (8652)20-65-13  
Сургут (3462)77-98-35  
Сыктывкар (8212)25-95-17  
Тамбов (4752)50-40-97  
Тверь (4822)63-31-35

Тольятти (8482)63-91-07  
Томск (3822)98-41-53  
Тула (4872)33-79-87  
Тюмень (3452)66-21-18  
Ульяновск (8422)24-23-59  
Улан-Удэ (3012)59-97-51  
Уфа (347)229-48-12  
Хабаровск (4212)92-98-04  
Чебоксары (8352)28-53-07  
Челябинск (351)202-03-61  
Череповец (8202)49-02-64  
Чита (3022)38-34-83  
Якутск (4112)23-90-97  
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(7172)727-132

Киргизия +996(312)96-26-47

<https://liv.nt-rt.ru/> || [vis@nt-rt.ru](mailto:vis@nt-rt.ru)



## Product description

standard Wheel with roller bearing and solid polyamide wheel with hardness 70±5 Shore D

Wheel diameter x width: 150 x 46 mm

Axle hole: 20 mm

Hub length: 58 mm

### Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

### Temperature range:

Continuous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

### Advantages of this Glide through the hall wheel:

- ✓ chemical resistance
- ✓ load capacity and shock impact resistant
- ✓ high temperature shifts

## LIV SYSTEMS standard wheel + solid polyamide wheel Ø150 x W46mm for 300kg Prod ID: 66706

ID 66706: standard Wheel with roller bearing and solid polyamide wheel with hardness 70±5 Shore D | Axle hole: 20 mm | Hub length: 58 mm | Glide through the hall, good chemical resistance, high load capacity and shock impact resistant, for high temperature

## Product information

- Article code 2-753 ISO
- SKU 66706
- EAN 3838461667060



## Product description

standard Wheel with plain bearing and solid polyamide wheel with hardness 70±5 Shore D

Wheel diameter x width: 150 x 46 mm

Axle hole: 20 mm

Hub length: 58 mm

### Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

### Temperature range:

Continuous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

### Advantages of this Glide through the hall wheel:

- ✓ chemical resistance
- ✓ load capacity and shock impact resistant
- ✓ high temperature shifts

## LIV SYSTEMS standard wheel + solid polyamide wheel Ø150 x W46mm for 300kg Prod ID: 66716

ID 66716: standard Wheel with plain bearing and solid polyamide wheel with hardness 70±5 Shore D | Axle hole: 20 mm | Hub length: 58 mm | Glide through the hall, good chemical resistance, high load capacity and shock impact resistant, for high temperature

## Product information

- Article code 2-763 ISO
- SKU 66716
- EAN 3838461667169

## Specifications



## Product description

standard Wheel with roller bearing and solid polyamide wheel with hardness 70±5 Shore D

Wheel diameter x width: 150 x 46 mm

Axle hole: 20 mm

Hub length: 58 mm

### Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

### Temperature range:

Continuous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

### Advantages of this Glide through the hall wheel:

- ✓ chemical resistance
- ✓ load capacity and shock impact resistant
- ✓ high temperature shifts

## LIV SYSTEMS standard wheel + solid polyamide wheel Ø150 x W46mm for 300kg Prod ID: 66701

ID 66701: standard Wheel with roller bearing and solid polyamide wheel with hardness 70±5 Shore D | Axle hole: 20 mm | Hub length: 58 mm | Glide through the hall, good chemical resistance, high load capacity and shock impact resistant, for high temperature

## Product information

- Article code 2-753 ISO
- SKU 66701
- EAN 3838461667015

## Specifications



## Product description

standard Wheel with plain bearing and solid polyamide wheel with hardness  $70\pm 5$  Shore D

Wheel diameter x width: 150 x 40 mm

Axle hole: 20 mm

Hub length: 50 mm

### Approved and tested load capacity

Dynamic 350 kg

Static 430 kg

### Temperature range:

Continuous operation:  $-25$  |  $+80^{\circ}\text{C}$

Short (10 min) exposure:  $-30$  |  $+110^{\circ}\text{C}$

### Advantages of this Glide through the hall wheel:

- ✓ chemical resistance
- ✓ load capacity and shock impact resistant
- ✓ high temperature shifts

## LIV SYSTEMS standard wheel + solid polyamide wheel $\varnothing 150$ x W40mm for 350kg Prod ID: 91631

ID 91631: standard Wheel with plain bearing and solid polyamide wheel with hardness  $70\pm 5$  Shore D | Axle hole: 20 mm | Hub length: 50 mm | Glide through the hall, good chemical resistance, high load capacity and shock impact resistant, for high temperature

## Product information

- Article code 2-763 A
- SKU 91631
- EAN 3838461916311

## Specifications



## Product description

standard Wheel with plain bearing and solid polyamide wheel with hardness 70±5 Shore D

Wheel diameter x width: 150 x 46 mm

Axle hole: 20 mm

Hub length: 58 mm

### Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

### Temperature range:

Continious operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

### Advantages of this Glide through the hall wheel:

- ✓ chemical resistance
- ✓ load capacity and shock impact resistant
- ✓ high temperature shifts

## LIV SYSTEMS standard wheel + solid polyamide wheel Ø150 x W46mm for 300kg Prod ID: 66711

ID 66711: standard Wheel with plain bearing and solid polyamide wheel with hardness 70±5 Shore D | Axle hole: 20 mm | Hub length: 58 mm | Glide through the hall, good chemical resistance, high load capacity and shock impact resistant, for high temperature

## Product information

- Article code 2-763 ISO
- SKU 66711
- EAN 3838461667114

## Specifications



## Product description

standard Wheel with plain bearing and solid polyamide wheel with hardness 70±5 Shore D

Wheel diameter x width: 150 x 40 mm

Axle hole: 20 mm

Hub length: 50 mm

### Approved and tested load capacity

Dynamic 350 kg

Static 430 kg

### Temperature range:

Continuous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

### Advantages of this Glide through the hall wheel:

- ✓ chemical resistance
- ✓ load capacity and shock impact resistant
- ✓ high temperature shifts


## LIV SYSTEMS standard wheel + solid polyamide wheel Ø150 x W40mm for 350kg Prod ID: 91355

ID 91355: standard Wheel with plain bearing and solid polyamide wheel with hardness 70±5 Shore D | Axle hole: 20 mm | Hub length: 50 mm | Glide through the hall, good chemical resistance, high load capacity and shock impact resistant, for high temperature

## Product information

- Article code 2-763 A
- SKU 91355
- EAN 3838461913556

## Specifications



## Product description

standard Swivel castor with an overall height of 180 mm

Wheel diameter x width: 150 x 46 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with plain bearing and solid polyamide wheel with hardness 70±5 Shore D.

### Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

### Temperature range:

Continuous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

### Advantages of this Glide through the hall Swivel castor:

- ✓ chemical resistance
- ✓ load capacity and shock impact resistant
- ✓ high temperature shifts

## LIV SYSTEMS standard Swivel castor + solid polyamide wheel Ø150 x W46mm for 300kg Prod ID: 66845

ID 66845: Castor overall height 180 mm | 4 mounting holes with distance 105x80 mm | Wheel with plain bearing and solid polyamide wheel with hardness 70±5 Shore D | Glide through the hall, good chemical resistance, high load capacity and shock impact resi

## Product information


- Article code 2-673 ISO
- SKU 66845
- EAN 3838461668456

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)



## Product description

standard Swivel castor with an overall height of 180 mm

Wheel diameter x width: 150 x 46 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with roller bearing and solid polyamide wheel with hardness 70±5 Shore D.

### Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

### Temperature range:

Continuous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

### Advantages of this Glide through the hall Swivel castor:

- ✓ chemical resistance
- ✓ load capacity and shock impact resistant
- ✓ high temperature shifts

## LIV SYSTEMS standard Swivel castor + solid polyamide wheel Ø150 x W46mm for 300kg Prod ID: 66731

ID 66731: Castor overall height 180 mm | 4 mounting holes with distance 105x80 mm | Wheel with roller bearing and solid polyamide wheel with hardness 70±5 Shore D | Glide through the hall, good chemical resistance, high load capacity and shock impact res

## Product information

- Article code 2-663 ISO
- SKU 66731
- EAN 3838461667312


## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)





## Product description

standard Swivel castor with brake with an overall height of 180 mm

Wheel diameter x width: 150 x 46 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with plain bearing and solid polyamide wheel with hardness 70±5 Shore D

the double brake system, brakes the turning of the wheel and the swivel rotation.

### Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

### Temperature range:

Continuous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

### Advantages of this Glide through the hall Swivel castor with brake:

- ✓ chemical resistance
- ✓ load capacity and shock impact resistant
- ✓ high temperature shifts

## LIV SYSTEMS standard Swivel castor with brake + solid polyamide wheel Ø150 x W46mm for 300kg Prod ID: 30474

ID 30474: Castor overall height 180 mm | 4 mounting holes with distance 105x80 mm | Wheel with plain bearing and solid polyamide wheel with hardness 70±5 Shore D |

The double brake system, brakes the turning of the wheel and the swivel rotation. | Glide

## Product information


- Article code 2-685 A
- SKU 30474
- EAN 3838461304743

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)



## Product description

standard Swivel castor with brake with an overall height of 180 mm

Wheel diameter x width: 150 x 46 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with roller bearing and solid polyamide wheel with hardness 70±5 Shore D

the double brake system, brakes the turning of the wheel and the swivel rotation.

### Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

### Temperature range:

Continuous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

### Advantages of this Glide through the hall Swivel castor with brake:

- ✓ chemical resistance
- ✓ load capacity and shock impact resistant
- ✓ high temperature shifts

## LIV SYSTEMS standard Swivel castor with brake + solid polyamide wheel Ø150 x W46mm for 300kg Prod ID: 30465

ID 30465: Castor overall height 180 mm | 4 mounting holes with distance 105x80 mm | Wheel with roller bearing and solid polyamide wheel with hardness 70±5 Shore D |

The double brake system, brakes the turning of the wheel and the swivel rotation. | Glide

## Product information


- Article code 2-724 A
- SKU 30465
- EAN 3838461304651

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

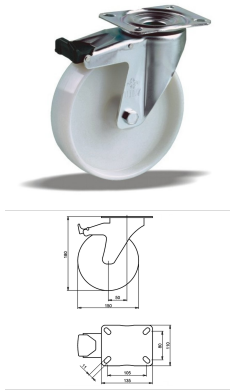

## Product description

standard Swivel castor with brake with an overall height of 180 mm

Wheel diameter x width: 150 x 46 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with plain bearing and solid polyamide wheel with hardness 70±5 Shore D

the double brake system, brakes the turning of the wheel and the swivel rotation.

### Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

### Temperature range:

Continuous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

### Advantages of this Glide through the hall Swivel castor with brake:

- ✓ chemical resistance
- ✓ load capacity and shock impact resistant
- ✓ high temperature shifts

## LIV SYSTEMS standard Swivel castor with brake + solid polyamide wheel Ø150 x W46mm for 300kg Prod ID: 30505

ID 30505: Castor overall height 180 mm | 4 mounting holes with distance 105x80 mm | Wheel with plain bearing and solid polyamide wheel with hardness 70±5 Shore D |

The double brake system, brakes the turning of the wheel and the swivel rotation. | Glide

## Product information


- Article code 2-685 A
- SKU 30505
- EAN 3838461305054

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

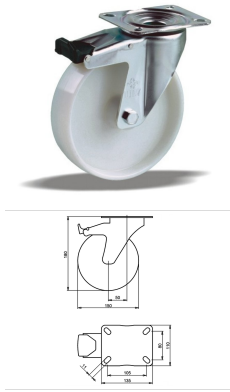

## Product description

standard Swivel castor with brake with an overall height of 180 mm

Wheel diameter x width: 150 x 46 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with ball bearing and solid polyamide wheel with hardness 70±5 Shore D  
the double brake system, brakes the turning of the wheel and the swivel rotation.

### Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

### Temperature range:

Continuous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

### Advantages of this Glide through the hall Swivel castor with brake:

- ✓ chemical resistance
- ✓ load capacity and shock impact resistant
- ✓ high temperature shifts

## LIV SYSTEMS standard Swivel castor with brake + solid polyamide wheel Ø150 x W46mm for 300kg Prod ID: 30504

ID 30504: Castor overall height 180 mm | 4 mounting holes with distance 105x80 mm | Wheel with ball bearing and solid polyamide wheel with hardness 70±5 Shore D | The double brake system, brakes the turning of the wheel and the swivel rotation. | Glide t

## Product information


- Article code 2-724 A
- SKU 30504
- EAN 3838461305047

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

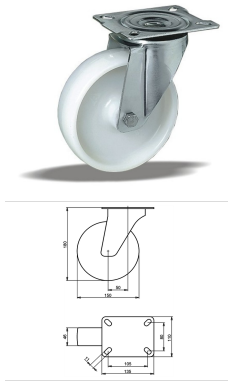

## Product description

standard Swivel castor with an overall height of 180 mm

Wheel diameter x width: 150 x 46 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with plain bearing and solid polyamide wheel with hardness 70±5 Shore D.

### Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

### Temperature range:

Continuous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

### Advantages of this Glide through the hall Swivel castor:

- ✓ chemical resistance
- ✓ load capacity and shock impact resistant
- ✓ high temperature shifts

## LIV SYSTEMS standard Swivel castor + solid polyamide wheel Ø150 x W46mm for 300kg Prod ID: 66850

ID 66850: Castor overall height 180 mm | 4 mounting holes with distance 105x80 mm | Wheel with plain bearing and solid polyamide wheel with hardness 70±5 Shore D | Glide through the hall, good chemical resistance, high load capacity and shock impact resi

## Product information


- Article code 2-673 ISO
- SKU 66850
- EAN 3838461668500

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

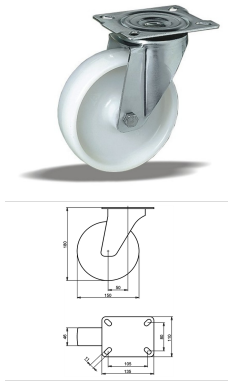

## Product description

standard Swivel castor with an overall height of 180 mm

Wheel diameter x width: 150 x 46 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with roller bearing and solid polyamide wheel with hardness 70±5 Shore D.

### Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

### Temperature range:

Continuous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

### Advantages of this Glide through the hall Swivel castor:

- ✓ chemical resistance
- ✓ load capacity and shock impact resistant
- ✓ high temperature shifts

## LIV SYSTEMS standard Swivel castor + solid polyamide wheel Ø150 x W46mm for 300kg Prod ID: 66734

ID 66734: Castor overall height 180 mm | 4 mounting holes with distance 105x80 mm | Wheel with roller bearing and solid polyamide wheel with hardness 70±5 Shore D | Glide through the hall, good chemical resistance, high load capacity and shock impact res

## Product information


- Article code 2-663 ISO
- SKU 66734
- EAN 3838461667343

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)



## Product description

standard Swivel castor with an overall height of 180 mm

Wheel diameter x width: 150 x 46 mm

Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 93 mm

Wheel with plain bearing and solid polyamide wheel with hardness 70±5 Shore D.

### Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

### Temperature range:

Continuous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

### Advantages of this Glide through the hall Swivel castor:

- ✓ chemical resistance
- ✓ load capacity and shock impact resistant
- ✓ high temperature shifts

## LIV SYSTEMS standard Swivel castor + solid polyamide wheel Ø150 x W46mm for 300kg Prod ID: 34423

ID 34423: Castor overall height 180 mm | 4 mounting holes with distance #\$\$ mm | Wheel with plain bearing and solid polyamide wheel with hardness 70±5 Shore D | Glide through the hall, good chemical resistance, high load capacity and shock impact resistance

## Product information


- Article code 2-768 L12
- SKU 34423
- EAN 3838461344237

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)



## Product description

standard Swivel castor with an overall height of 180 mm

Wheel diameter x width: 150 x 46 mm

Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 93 mm

Wheel with roller bearing and solid polyamide wheel with hardness 70±5 Shore D.

### Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

### Temperature range:

Continuous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

### Advantages of this Glide through the hall Swivel castor:

- ✓ chemical resistance
- ✓ load capacity and shock impact resistant
- ✓ high temperature shifts

## LIV SYSTEMS standard Swivel castor + solid polyamide wheel Ø150 x W46mm for 300kg Prod ID: 34415

ID 34415: Castor overall height 180 mm | 4 mounting holes with distance #\$\$ mm | Wheel with roller bearing and solid polyamide wheel with hardness 70±5 Shore D | Glide through the hall, good chemical resistance, high load capacity and shock impact resist

## Product information

- Article code 2-758 L12
- SKU 34415
- EAN 3838461344152


## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)





## Product description

standard Swivel castor with brake with an overall height of 180 mm  
 Wheel diameter x width: 150 x 46 mm  
 Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 93 mm  
 Wheel with plain bearing and solid polyamide wheel with hardness 70±5 Shore D  
 the double brake system, brakes the turning of the wheel and the swivel rotation.

### Approved and tested load capacity

Dynamic 300 kg  
 Static 370 kg

### Temperature range:

Continuous operation: -25 | +80°C  
 Short (10 min) exposure: -30 | +110°C

### Advantages of this Glide through the hall Swivel castor with brake:

- ✓ chemical resistance
- ✓ load capacity and shock impact resistant
- ✓ high temperature shifts

## LIV SYSTEMS standard Swivel castor with brake + solid polyamide wheel Ø150 x W46mm for 300kg Prod ID: 34684

ID 34684: Castor overall height 180 mm | 4 mounting holes with distance #\$\$ mm | Wheel with plain bearing and solid polyamide wheel with hardness 70±5 Shore D | The double brake system, brakes the turning of the wheel and the swivel rotation. | Glide thr

## Product information


- Article code 2-796 L12
- SKU 34684
- EAN 3838461346842

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)



## Product description

standard Swivel castor with brake with an overall height of 180 mm  
 Wheel diameter x width: 150 x 46 mm  
 Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 93 mm  
 Wheel with roller bearing and solid polyamide wheel with hardness 70±5 Shore D  
 the double brake system, brakes the turning of the wheel and the swivel rotation.

### Approved and tested load capacity

Dynamic 300 kg  
 Static 370 kg

### Temperature range:

Continuous operation: -25 | +80°C  
 Short (10 min) exposure: -30 | +110°C

### Advantages of this Glide through the hall Swivel castor with brake:

- ✓ chemical resistance
- ✓ load capacity and shock impact resistant
- ✓ high temperature shifts

## LIV SYSTEMS standard Swivel castor with brake + solid polyamide wheel Ø150 x W46mm for 300kg Prod ID: 34665

ID 34665: Castor overall height 180 mm | 4 mounting holes with distance #\$\$ mm | Wheel with roller bearing and solid polyamide wheel with hardness 70±5 Shore D | The double brake system, brakes the turning of the wheel and the swivel rotation. | Glide th

## Product information


- Article code 2-791 L12
- SKU 34665
- EAN 3838461346651

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

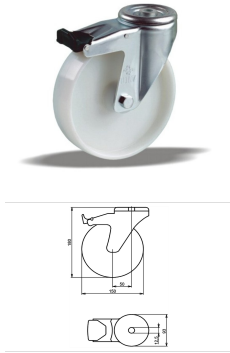

## Product description

standard Swivel castor with brake with an overall height of 180 mm  
 Wheel diameter x width: 150 x 46 mm  
 Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 93 mm  
 Wheel with plain bearing and solid polyamide wheel with hardness 70±5 Shore D  
 the double brake system, brakes the turning of the wheel and the swivel rotation.

### Approved and tested load capacity

Dynamic 300 kg  
 Static 370 kg

### Temperature range:

Continuous operation: -25 | +80°C  
 Short (10 min) exposure: -30 | +110°C

### Advantages of this Glide through the hall Swivel castor with brake:

- ✓ chemical resistance
- ✓ load capacity and shock impact resistant
- ✓ high temperature shifts

## LIV SYSTEMS standard Swivel castor with brake + solid polyamide wheel Ø150 x W46mm for 300kg Prod ID: 34735

ID 34735: Castor overall height 180 mm | 4 mounting holes with distance #\$\$ mm | Wheel with plain bearing and solid polyamide wheel with hardness 70±5 Shore D | The double brake system, brakes the turning of the wheel and the swivel rotation. | Glide thr

## Product information


- Article code 2-796 L12
- SKU 34735
- EAN 3838461347351

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

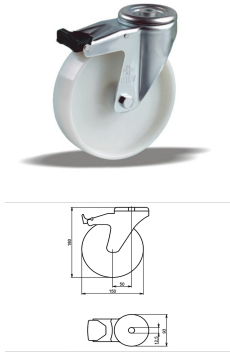

## Product description

standard Swivel castor with brake with an overall height of 180 mm  
 Wheel diameter x width: 150 x 46 mm  
 Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 93 mm  
 Wheel with roller bearing and solid polyamide wheel with hardness 70±5 Shore D  
 the double brake system, brakes the turning of the wheel and the swivel rotation.

### Approved and tested load capacity

Dynamic 300 kg  
 Static 370 kg

### Temperature range:

Continious operation: -25 | +80°C  
 Short (10 min) exposure: -30 | +110°C

### Advantages of this Glide through the hall Swivel castor with brake:

- ✓ chemical resistance
- ✓ load capacity and shock impact resistant
- ✓ high temperature shifts

## LIV SYSTEMS standard Swivel castor with brake + solid polyamide wheel Ø150 x W46mm for 300kg Prod ID: 34734

ID 34734: Castor overall height 180 mm | 4 mounting holes with distance #\$\$ mm | Wheel with roller bearing and solid polyamide wheel with hardness 70±5 Shore D | The double brake system, brakes the turning of the wheel and the swivel rotation. | Glide th

## Product information


- Article code 2-791 L12
- SKU 34734
- EAN 3838461347344

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

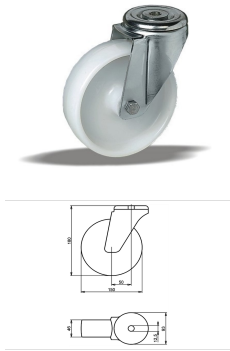

## Product description

standard Swivel castor with an overall height of 180 mm

Wheel diameter x width: 150 x 46 mm

Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 93 mm

Wheel with plain bearing and solid polyamide wheel with hardness 70±5 Shore D.

### Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

### Temperature range:

Continuous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

### Advantages of this Glide through the hall Swivel castor:

- ✓ chemical resistance
- ✓ load capacity and shock impact resistant
- ✓ high temperature shifts

## LIV SYSTEMS standard Swivel castor + solid polyamide wheel Ø150 x W46mm for 300kg Prod ID: 34483

ID 34483: Castor overall height 180 mm | 4 mounting holes with distance #\$\$ mm | Wheel with plain bearing and solid polyamide wheel with hardness 70±5 Shore D | Glide through the hall, good chemical resistance, high load capacity and shock impact resista

## Product information


- Article code 2-768 L12
- SKU 34483
- EAN 3838461344831

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)



## Product description

standard Swivel castor with an overall height of 180 mm

Wheel diameter x width: 150 x 46 mm

Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 93 mm

Wheel with roller bearing and solid polyamide wheel with hardness 70±5 Shore D.

### Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

### Temperature range:

Continuous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

### Advantages of this Glide through the hall Swivel castor:

- ✓ chemical resistance
- ✓ load capacity and shock impact resistant
- ✓ high temperature shifts

## LIV SYSTEMS standard Swivel castor + solid polyamide wheel Ø150 x W46mm for 300kg Prod ID: 34475

ID 34475: Castor overall height 180 mm | 4 mounting holes with distance #\$\$ mm | Wheel with roller bearing and solid polyamide wheel with hardness 70±5 Shore D | Glide through the hall, good chemical resistance, high load capacity and shock impact resist

## Product information


- Article code 2-758 L12
- SKU 34475
- EAN 3838461344756

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)



## Product description

standard Fixed castor with an overall height of 180 mm

Wheel diameter x width: 150 x 46 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with plain bearing and solid polyamide wheel with hardness 70±5 Shore D.

### Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

### Temperature range:

Continuous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

### Advantages of this Glide through the hall Fixed castor:

- ✓ chemical resistance
- ✓ load capacity and shock impact resistant
- ✓ high temperature shifts

## LIV SYSTEMS standard Fixed castor + solid polyamide wheel Ø150 x W46mm for 300kg Prod ID: 67012

ID 67012: Castor overall height 180 mm | 4 mounting holes with distance 105x80 mm | Wheel with plain bearing and solid polyamide wheel with hardness 70±5 Shore D |

Glide through the hall, good chemical resistance, high load capacity and shock impact resi

## Product information


- Article code 2-678 ISO
- SKU 67012
- EAN 3838461670121

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)



## Product description

standard Fixed castor with an overall height of 180 mm

Wheel diameter x width: 150 x 46 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with roller bearing and solid polyamide wheel with hardness 70±5 Shore D.

### Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

### Temperature range:

Continuous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

### Advantages of this Glide through the hall Fixed castor:

- ✓ chemical resistance
- ✓ load capacity and shock impact resistant
- ✓ high temperature shifts

## LIV SYSTEMS standard Fixed castor + solid polyamide wheel Ø150 x W46mm for 300kg Prod ID: 66996

ID 66996: Castor overall height 180 mm | 4 mounting holes with distance 105x80 mm | Wheel with roller bearing and solid polyamide wheel with hardness 70±5 Shore D |

Glide through the hall, good chemical resistance, high load capacity and shock impact res

## Product information

- Article code 2-668 ISO
- SKU 66996
- EAN 3838461669965


## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)



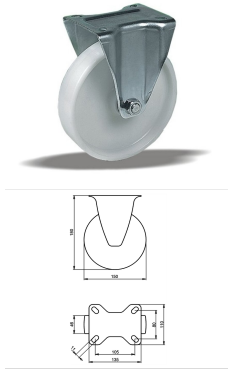

## Product description

standard Fixed castor with an overall height of 180 mm

Wheel diameter x width: 150 x 46 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with plain bearing and solid polyamide wheel with hardness 70±5 Shore D.

### Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

### Temperature range:

Continuous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

### Advantages of this Glide through the hall Fixed castor:

- ✓ chemical resistance
- ✓ load capacity and shock impact resistant
- ✓ high temperature shifts

## LIV SYSTEMS standard Fixed castor + solid polyamide wheel Ø150 x W46mm for 300kg Prod ID: 67017

ID 67017: Castor overall height 180 mm | 4 mounting holes with distance 105x80 mm | Wheel with plain bearing and solid polyamide wheel with hardness 70±5 Shore D |

Glide through the hall, good chemical resistance, high load capacity and shock impact resi

## Product information


- Article code 2-678 ISO
- SKU 67017
- EAN 3838461670176

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

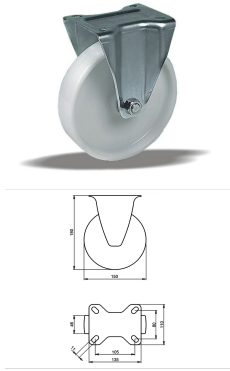

## Product description

standard Fixed castor with an overall height of 180 mm

Wheel diameter x width: 150 x 46 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with roller bearing and solid polyamide wheel with hardness 70±5 Shore D.

### Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

### Temperature range:

Continuous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

### Advantages of this Glide through the hall Fixed castor:

- ✓ chemical resistance
- ✓ load capacity and shock impact resistant
- ✓ high temperature shifts

## LIV SYSTEMS standard Fixed castor + solid polyamide wheel Ø150 x W46mm for 300kg Prod ID: 67002

ID 67002: Castor overall height 180 mm | 4 mounting holes with distance 105x80 mm | Wheel with roller bearing and solid polyamide wheel with hardness 70±5 Shore D | Glide through the hall, good chemical resistance, high load capacity and shock impact res

## Product information

- Article code 2-668 ISO
- SKU 67002
- EAN 3838461670022

**Алматы** (7273)495-231  
**Ангарск** (3955)60-70-56  
**Архангельск** (8182)63-90-72  
**Астрахань** (8512)99-46-04  
**Барнаул** (3852)73-04-60  
**Белгород** (4722)40-23-64  
**Благовещенск** (4162)22-76-07  
**Брянск** (4832)59-03-52  
**Владивосток** (423)249-28-31  
**Владикавказ** (8672)28-90-48  
**Владимир** (4922)49-43-18  
**Волгоград** (844)278-03-48  
**Вологда** (8172)26-41-59  
**Воронеж** (473)204-51-73  
**Екатеринбург** (343)384-55-89

**Иваново** (4932)77-34-06  
**Ижевск** (3412)26-03-58  
**Иркутск** (395)279-98-46  
**Казань** (843)206-01-48  
**Калининград** (4012)72-03-81  
**Калуга** (4842)92-23-67  
**Кемерово** (3842)65-04-62  
**Киров** (8332)68-02-04  
**Коломна** (4966)23-41-49  
**Кострома** (4942)77-07-48  
**Краснодар** (861)203-40-90  
**Красноярск** (391)204-63-61  
**Курск** (4712)77-13-04  
**Курган** (3522)50-90-47  
**Липецк** (4742)52-20-81

**Магнитогорск** (3519)55-03-13  
**Москва** (495)268-04-70  
**Мурманск** (8152)59-64-93  
**Набережные Челны** (8552)20-53-41  
**Нижний Новгород** (831)429-08-12  
**Новокузнецк** (3843)20-46-81  
**Ноябрьск** (3496)41-32-12  
**Новосибирск** (383)227-86-73  
**Омск** (3812)21-46-40  
**Орел** (4862)44-53-42  
**Оренбург** (3532)37-68-04  
**Пенза** (8412)22-31-16  
**Петрозаводск** (8142)55-98-37  
**Псков** (8112)59-10-37  
**Пермь** (342)205-81-47

**Ростов-на-Дону** (863)308-18-15  
**Рязань** (4912)46-61-64  
**Самара** (846)206-03-16  
**Санкт-Петербург** (812)309-46-40  
**Саратов** (845)249-38-78  
**Севастополь** (8692)22-31-93  
**Саранск** (8342)22-96-24  
**Симферополь** (3652)67-13-56  
**Смоленск** (4812)29-41-54  
**Сочи** (862)225-72-31  
**Ставрополь** (8652)20-65-13  
**Сургут** (3462)77-98-35  
**Сыктывкар** (8212)25-95-17  
**Тамбов** (4752)50-40-97  
**Тверь** (4822)63-31-35

**Тольятти** (8482)63-91-07  
**Томск** (3822)98-41-53  
**Тула** (4872)33-79-87  
**Тюмень** (3452)66-21-18  
**Ульяновск** (8422)24-23-59  
**Улан-Удэ** (3012)59-97-51  
**Уфа** (347)229-48-12  
**Хабаровск** (4212)92-98-04  
**Чебоксары** (8352)28-53-07  
**Челябинск** (351)202-03-61  
**Череповец** (8202)49-02-64  
**Чита** (3022)38-34-83  
**Якутск** (4112)23-90-97  
**Ярославль** (4852)69-52-93

**Россия** +7(495)268-04-70

**Казахстан** +7(7172)727-132

**Киргизия** +996(312)96-26-47

<https://liv.nt-rt.ru/> || [vis@nt-rt.ru](mailto:vis@nt-rt.ru)