

Алматы (7273)495-231
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35


Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(7172)727-132

Киргизия +996(312)96-26-47

<https://liv.nt-rt.ru/> || vis@nt-rt.ru

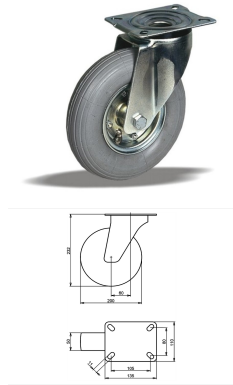

Product description

for rough floors Swivel castor with an overall height of 232 mm

Wheel diameter x width: 200 x 50 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with roller bearing and grey pneumatic with hardness 83 ° Shore A on steel rim with electrogalvanization zinc plating anti-corrosion protection Cr6-free.

Approved and tested load capacity

Dynamic 75 kg

Static 90 kg

Temperature range:

Continuous operation: -5 | +60°C

Short (10 min) exposure: -5 | +60°C

Advantages of this Soft route Swivel castor:

- ✓ over obstacles
- ✓ the floor untact
- ✓ crushed stone ground

LIV SYSTEMS for rough floors Swivel castor + grey pneumatic Ø200 x W50mm for 75kg Prod ID: 62098

ID 62098: Castor overall height 232 mm | 4 mounting holes with distance 105x80 mm | Wheel with roller bearing and grey pneumatic with hardness 83 ° Shore A | Soft route, gentle over obstacles, keep the floor untact, for crushed stone ground

Product information

- Article code 2-611 ISO
- SKU 62098
- EAN 3838461620980

Specifications

The result of our quality is maximum performance!



Product description

for rough floors Wheel with roller bearing and grey pneumatic with hardness 83 ° Shore A on steel rim with electrogalvanization zinc plating anti-corrosion protection Cr6-free

Wheel diameter x width: 200 x 50 mm

Axle hole: 20 mm

Hub length: 58 mm

Approved and tested load capacity

Dynamic 75 kg

Static 90 kg

Temperature range:

Continuous operation: -5 | +60°C

Short (10 min) exposure: -5 | +60°C

Advantages of this Soft route wheel:

- ✓ over obstacles
- ✓ the floor untact
- ✓ crushed stone ground

LIV SYSTEMS for rough floors wheel + grey pneumatic Ø200 x W50mm for 75kg Prod ID: 62097

ID 62097: for rough floors Wheel with roller bearing and grey pneumatic with hardness 83 ° Shore A on steel rim with electrogalvanization zinc plating anti-corrosion protection Cr6-free | Axle hole: 20 mm | Hub length: 58 mm | Soft route, gentle over obst

Product information

- Article code 2-512 ISO
- SKU 62097
- EAN 3838461620973

Product description

for rough floors Swivel castor with an overall height of 232 mm

Wheel diameter x width: 200 x 50 mm

Top plate with 4 mounting holes of #\$\$% mm, mounting hole distance #\$\$% mm and top plate outer dimensions: 93 mm

Wheel with plain bearing and grey pneumatic with hardness 83 ° Shore A on steel rim with electrogalvanization zinc plating anti-corrosion protection Cr6-free.

Approved and tested load capacity

Dynamic 75 kg

Static 90 kg

Temperature range:

Continuous operation: -5 | +60°C

Short (10 min) exposure: -5 | +60°C

Advantages of this Soft route Swivel castor:

- ✓ over obstacles
- ✓ the floor untact
- ✓ crushed stone ground

LIV SYSTEMS for rough floors Swivel castor + grey pneumatic Ø200 x W50mm for 75kg Prod ID: 31844


ID 31844: Castor overall height 232 mm | 4 mounting holes with distance #\$\$% mm | Wheel with plain bearing and grey pneumatic with hardness 83 ° Shore A | Soft route, gentle over obstacles, keep the floor untact, for crushed stone ground

Product information

- Article code 2-499
- SKU 31844
- EAN 3838461318443

Specifications

The result of our quality is maximum performance!

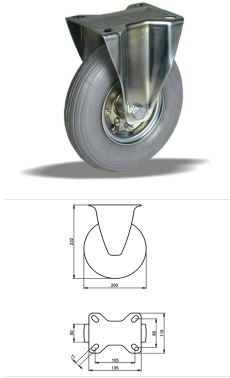

Product description

for rough floors Fixed castor with an overall height of 232 mm

Wheel diameter x width: 200 x 50 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with plain bearing and grey pneumatic with hardness 83 ° Shore A on steel rim with electrogalvanization zinc plating anti-corrosion protection Cr6-free.

Approved and tested load capacity

Dynamic 75 kg

Static 90 kg

Temperature range:

Continuous operation: -5 | +60°C

Short (10 min) exposure: -5 | +60°C

Advantages of this Soft route Fixed castor:

- ✓ over obstacles
- ✓ the floor untact
- ✓ crushed stone ground

LIV SYSTEMS for rough floors Fixed castor + grey pneumatic Ø200 x W50mm for 75kg Prod ID: 31834


ID 31834: Castor overall height 232 mm | 4 mounting holes with distance 105x80 mm | Wheel with plain bearing and grey pneumatic with hardness 83 ° Shore A | Soft route, gentle over obstacles, keep the floor untact, for crushed stone ground

Product information

- Article code 2-546 ISO
- SKU 31834
- EAN 3838461318344

Specifications

The result of our quality is maximum performance!

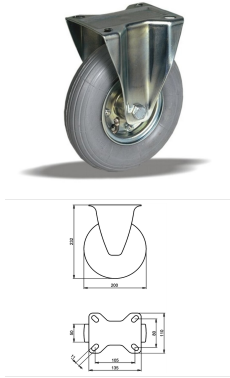

Product description

for rough floors Fixed castor with an overall height of 232 mm

Wheel diameter x width: 200 x 50 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with roller bearing and grey pneumatic with hardness 83 ° Shore A on steel rim with electrogalvanization zinc plating anti-corrosion protection Cr6-free.

Approved and tested load capacity

Dynamic 75 kg

Static 90 kg

Temperature range:

Continuous operation: -5 | +60°C

Short (10 min) exposure: -5 | +60°C

Advantages of this Soft route Fixed castor:

- ✓ over obstacles
- ✓ the floor untact
- ✓ crushed stone ground

LIV SYSTEMS for rough floors Fixed castor + grey pneumatic Ø200 x W50mm for 75kg Prod ID: 62099

ID 62099: Castor overall height 232 mm | 4 mounting holes with distance 105x80 mm | Wheel with roller bearing and grey pneumatic with hardness 83 ° Shore A | Soft route, gentle over obstacles, keep the floor untact, for crushed stone ground

Product information

- Article code 2-612 ISO
- SKU 62099
- EAN 3838461620997

Specifications

The result of our quality is maximum performance!



Product description

for rough floors Wheel with plain bearing and grey pneumatic with hardness 83 ° Shore A on polypropylene

Wheel diameter x width: 200 x 50 mm

Axle hole: 20 mm

Hub length: 58 mm

Approved and tested load capacity

Dynamic 60 kg

Static 70 kg

Temperature range:

Continuous operation: -5 | +60°C

Short (10 min) exposure: -5 | +60°C

Advantages of this Light run wheel:

- ✓ marks left
- ✓ for uneven terrain
- ✓ amortisation

LIV SYSTEMS for rough floors wheel + grey pneumatic Ø200 x W50mm for 60kg Prod ID: 64100

ID 64100: for rough floors Wheel with plain bearing and grey pneumatic with hardness 83 ° Shore A on polypropylene | Axle hole: 20 mm | Hub length: 58 mm | Light run, no marks left, appropriate for uneven terrain, good amortisation

Product information

- Article code 2-634 ISO
- SKU 64100
- EAN 3838461641008

Specifications



Product description

for rough floors Wheel with roller bearing and grey pneumatic with hardness 83 ° Shore A on polypropylene

Wheel diameter x width: 200 x 50 mm

Axle hole: 20 mm

Hub length: 58 mm

Approved and tested load capacity

Dynamic 60 kg

Static 70 kg

Temperature range:

Continuous operation: -5 | +60°C

Short (10 min) exposure: -5 | +60°C

Advantages of this Light run wheel:

- ✓ marks left
- ✓ for uneven terrain
- ✓ amortisation


LIV SYSTEMS for rough floors wheel + grey pneumatic Ø200 x W50mm for 60kg Prod ID: 64097

ID 64097: for rough floors Wheel with roller bearing and grey pneumatic with hardness 83 ° Shore A on polypropylene | Axle hole: 20 mm | Hub length: 58 mm | Light run, no marks left, appropriate for uneven terrain, good amortisation

Product information

- Article code 2-633 ISO
- SKU 64097
- EAN 3838461640971

Specifications

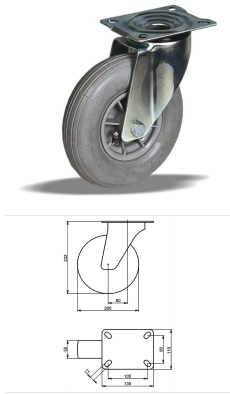

Product description

for rough floors Swivel castor with an overall height of 232 mm

Wheel diameter x width: 200 x 50 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with roller bearing and grey pneumatic with hardness 83 ° Shore A on polypropylene.

Approved and tested load capacity

Dynamic 60 kg

Static 70 kg

Temperature range:

Continuous operation: -5 | +60°C

Short (10 min) exposure: -5 | +60°C

Advantages of this Light run Swivel castor:

- ✓ marks left
- ✓ for uneven terrain
- ✓ amortisation

LIV SYSTEMS for rough floors Swivel castor + grey pneumatic Ø200 x W50mm for 60kg Prod ID: 32645


ID 32645: Castor overall height 232 mm | 4 mounting holes with distance 105x80 mm | Wheel with roller bearing and grey pneumatic with hardness 83 ° Shore A | Light run, no marks left, appropriate for uneven terrain, good amortisation

Product information

- Article code 2-406 ISO
- SKU 32645
- EAN 3838461326455

Specifications

The result of our quality is maximum performance!

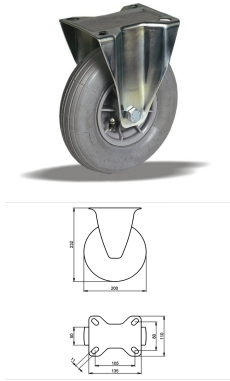

Product description

for rough floors Fixed castor with an overall height of 232 mm

Wheel diameter x width: 200 x 50 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with roller bearing and grey pneumatic with hardness 83 ° Shore A on polypropylene.

Approved and tested load capacity

Dynamic 60 kg

Static 70 kg

Temperature range:

Continuous operation: -5 | +60°C

Short (10 min) exposure: -5 | +60°C

Advantages of this Light run Fixed castor:

- ✓ marks left
- ✓ for uneven terrain
- ✓ amortisation

LIV SYSTEMS for rough floors Fixed castor + grey pneumatic Ø200 x W50mm for 60kg Prod ID: 32693

ID 32693: Castor overall height 232 mm | 4 mounting holes with distance 105x80 mm | Wheel with roller bearing and grey pneumatic with hardness 83 ° Shore A | Light run, no marks left, appropriate for uneven terrain, good amortisation

Product information

- Article code 2-447 ISO
- SKU 32693
- EAN 3838461326936

Specifications

The result of our quality is maximum performance!



Product description

for rough floors Wheel with plain bearing and grey pneumatic with hardness 83 ° Shore A on steel rim with electrogalvanization zinc plating anti-corrosion protection Cr6-free

Wheel diameter x width: 200 x 50 mm

Axle hole: 20 mm

Hub length: 58 mm

Approved and tested load capacity

Dynamic 75 kg

Static 90 kg

Temperature range:

Continuous operation: -5 | +60°C

Short (10 min) exposure: -5 | +60°C

Advantages of this Soft route wheel:


- ✓ over obstacles
- ✓ the floor untact
- ✓ crushed stone ground

LIV SYSTEMS for rough floors wheel + grey pneumatic Ø200 x W50mm for 75kg Prod ID: 91044

ID 91044: for rough floors Wheel with plain bearing and grey pneumatic with hardness 83 ° Shore A on steel rim with electrogalvanization zinc plating anti-corrosion protection Cr6-free | Axle hole: 20 mm | Hub length: 58 mm | Soft route, gentle over obsta

Product information

- Article code 2-501 ISO
- SKU 91044
- EAN 3838461910449

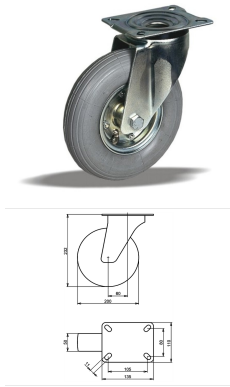

Product description

for rough floors Swivel castor with an overall height of 232 mm

Wheel diameter x width: 200 x 50 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with plain bearing and grey pneumatic with hardness 83 ° Shore A on steel rim with electrogalvanization zinc plating anti-corrosion protection Cr6-free.

Approved and tested load capacity

Dynamic 75 kg

Static 90 kg

Temperature range:

Continuous operation: -5 | +60°C

Short (10 min) exposure: -5 | +60°C

Advantages of this Soft route Swivel castor:

- ✓ over obstacles
- ✓ the floor untact
- ✓ crushed stone ground

LIV SYSTEMS for rough floors Swivel castor + grey pneumatic Ø200 x W50mm for 75kg Prod ID: 31833

ID 31833: Castor overall height 232 mm | 4 mounting holes with distance 105x80 mm | Wheel with plain bearing and grey pneumatic with hardness 83 ° Shore A | Soft route, gentle over obstacles, keep the floor untact, for crushed stone ground

Product information

- Article code 2-536 ISO
- SKU 31833
- EAN 3838461318337

Specifications

The result of our quality is maximum performance!

Product description

for rough floors Swivel castor with an overall height of 232 mm

Wheel diameter x width: 200 x 50 mm

Top plate with 4 mounting holes of #\$\$% mm, mounting hole distance #\$\$% mm and top plate outer dimensions: 93 mm

Wheel with roller bearing and grey pneumatic with hardness 83 ° Shore A on steel rim with electrogalvanization zinc plating anti-corrosion protection Cr6-free.

Approved and tested load capacity

Dynamic 75 kg

Static 90 kg

Temperature range:

Continuous operation: -5 | +60°C

Short (10 min) exposure: -5 | +60°C

Advantages of this Soft route Swivel castor:

- ✓ over obstacles
- ✓ the floor untact
- ✓ crushed stone ground

LIV SYSTEMS for rough floors Swivel castor + grey pneumatic Ø200 x W50mm for 75kg Prod ID: 31843


ID 31843: Castor overall height 232 mm | 4 mounting holes with distance #\$\$% mm | Wheel with roller bearing and grey pneumatic with hardness 83 ° Shore A | Soft route, gentle over obstacles, keep the floor untact, for crushed stone ground

Product information

- Article code 2-497
- SKU 31843
- EAN 3838461318436

Specifications

The result of our quality is maximum performance!

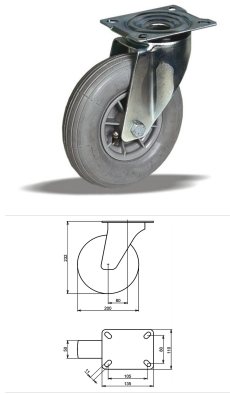

Product description

for rough floors Swivel castor with an overall height of 232 mm

Wheel diameter x width: 200 x 50 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with plain bearing and grey pneumatic with hardness 83 ° Shore A on polypropylene.

Approved and tested load capacity

Dynamic 60 kg

Static 70 kg

Temperature range:

Continuous operation: -5 | +60°C

Short (10 min) exposure: -5 | +60°C

Advantages of this Light run Swivel castor:

- ✓ marks left
- ✓ for uneven terrain
- ✓ amortisation

LIV SYSTEMS for rough floors Swivel castor + grey pneumatic Ø200 x W50mm for 60kg Prod ID: 32664

ID 32664: Castor overall height 232 mm | 4 mounting holes with distance 105x80 mm | Wheel with plain bearing and grey pneumatic with hardness 83 ° Shore A | Light run, no marks left, appropriate for uneven terrain, good amortisation

Product information

- Article code 2-412 ISO
- SKU 32664
- EAN 3838461326646

Specifications

The result of our quality is maximum performance!

Product description

for rough floors Swivel castor with an overall height of 232 mm

Wheel diameter x width: 200 x 50 mm

Top plate with 4 mounting holes of #\$\$% mm, mounting hole distance #\$\$% mm and top plate outer dimensions: 93 mm

Wheel with plain bearing and grey pneumatic with hardness 83 ° Shore A on polypropylene.

Approved and tested load capacity

Dynamic 60 kg

Static 70 kg

Temperature range:

Continuous operation: -5 | +60°C

Short (10 min) exposure: -5 | +60°C

Advantages of this Light run Swivel castor:

- ✓ marks left
- ✓ for uneven terrain
- ✓ amortisation

LIV SYSTEMS for rough floors Swivel castor + grey pneumatic Ø200 x W50mm for 60kg Prod ID: 32684

ID 32684: Castor overall height 232 mm | 4 mounting holes with distance #\$\$% mm | Wheel with plain bearing and grey pneumatic with hardness 83 ° Shore A | Light run, no marks left, appropriate for uneven terrain, good amortisation

Product information

- Article code 2-445
- SKU 32684
- EAN 3838461326844

Specifications

The result of our quality is maximum performance!

Product description

for rough floors Swivel castor with an overall height of 232 mm

Wheel diameter x width: 200 x 50 mm

Top plate with 4 mounting holes of #\$\$ mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 93 mm

Wheel with roller bearing and grey pneumatic with hardness 83 ° Shore A on polypropylene.

Approved and tested load capacity

Dynamic 60 kg

Static 70 kg

Temperature range:

Continuous operation: -5 | +60°C

Short (10 min) exposure: -5 | +60°C

Advantages of this Light run Swivel castor:

- ✓ marks left
- ✓ for uneven terrain
- ✓ amortisation

LIV SYSTEMS for rough floors Swivel castor + grey pneumatic Ø200 x W50mm for 60kg Prod ID: 32683


ID 32683: Castor overall height 232 mm | 4 mounting holes with distance #\$\$ mm | Wheel with roller bearing and grey pneumatic with hardness 83 ° Shore A | Light run, no marks left, appropriate for uneven terrain, good amortisation

Product information

- Article code 2-432
- SKU 32683
- EAN 3838461326837

Specifications

The result of our quality is maximum performance!

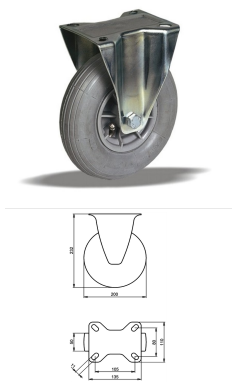

Product description

for rough floors Fixed castor with an overall height of 232 mm

Wheel diameter x width: 200 x 50 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with plain bearing and grey pneumatic with hardness 83 ° Shore A on polypropylene.

Approved and tested load capacity

Dynamic 60 kg

Static 70 kg

Temperature range:

Continuous operation: -5 | +60°C

Short (10 min) exposure: -5 | +60°C

Advantages of this Light run Fixed castor:

- ✓ marks left
- ✓ for uneven terrain
- ✓ amortisation

LIV SYSTEMS for rough floors Fixed castor + grey pneumatic Ø200 x W50mm for 60kg Prod ID: 32703

ID 32703: Castor overall height 232 mm | 4 mounting holes with distance 105x80 mm | Wheel with plain bearing and grey pneumatic with hardness 83 ° Shore A | Light run, no marks left, appropriate for uneven terrain, good amortisation

Product information

- Article code 2-448 ISO
- SKU 32703
- EAN 3838461327032

Specifications

The result of our quality is maximum performance!

Алматы (7273)495-231
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Россия +7(495)268-04-70

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Казахстан +7(7172)727-132

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Киргизия +996(312)96-26-47

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

<https://liv.nt-rt.ru/> || vis@nt-rt.ru