

Алматы (7273)495-231
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35


Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(7172)727-132

Киргизия +996(312)96-26-47

<https://liv.nt-rt.ru/> || vis@nt-rt.ru

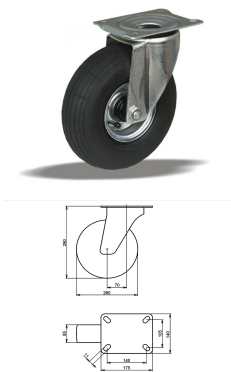

Product description

for rough floors Swivel castor with an overall height of 290 mm

Wheel diameter x width: 260 x 85 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 140x105 mm and top plate outer dimensions: 175x140 mm

Wheel with roller bearing and black pneumatic with hardness 80 ° Shore A on steel rim with electrogalvanization zinc plating anti-corrosion protection Cr6-free.

Approved and tested load capacity

Dynamic 200 kg

Static 250 kg

Temperature range:

Continuous operation: -5 | +60°C

Short (10 min) exposure: -5 | +60°C

Advantages of this Camel Trophy trip Swivel castor:

- ✓ absorbing
- ✓ pass the obstacle
- ✓ uneven ground

LIV SYSTEMS for rough floors Swivel castor + black pneumatic Ø260 x W85mm for 200kg Prod ID: 30174

ID 30174: Castor overall height 290 mm | 4 mounting holes with distance 140x105 mm | Wheel with roller bearing and black pneumatic with hardness 80 ° Shore A | Camel Trophy trip, Shock absorbing, easily pass the obstacle, for uneven ground

Product information

- Article code 2-619 A
- SKU 30174
- EAN 3838461301742

Specifications

The result of our quality is maximum performance!



Product description

for rough floors Wheel with roller bearing and black pneumatic with hardness 80 ° Shore A on steel rim with electrogalvanization zinc plating anti-corrosion protection Cr6-free

Wheel diameter x width: 260 x 85 mm

Axle hole: 20 mm

Hub length: 75 mm

Approved and tested load capacity

Dynamic 200 kg

Static 250 kg

Temperature range:

Continuous operation: -5 | +60°C

Short (10 min) exposure: -5 | +60°C

Advantages of this Camel Trophy trip wheel:


- ✓ absorbing
- ✓ pass the obstacle
- ✓ uneven ground

LIV SYSTEMS for rough floors wheel + black pneumatic Ø260 x W85mm for 200kg Prod ID: 91045

ID 91045: for rough floors Wheel with roller bearing and black pneumatic with hardness 80 ° Shore A on steel rim with electrogalvanization zinc plating anti-corrosion protection Cr6-free | Axle hole: 20 mm | Hub length: 75 mm | Camel Trophy trip, Shock ab

Product information

- Article code 2-514 D
- SKU 91045
- EAN 3838461910456

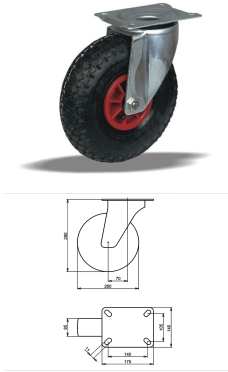

Product description

for rough floors Swivel castor with an overall height of 290 mm

Wheel diameter x width: 260 x 85 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 140x105 mm and top plate outer dimensions: 175x140 mm

Wheel with roller bearing and black pneumatic with hardness 80 ° Shore A on polypropylene.

Approved and tested load capacity

Dynamic 150 kg

Static 180 kg

Temperature range:

Continuous operation: -5 | +60°C

Short (10 min) exposure: -5 | +60°C

Advantages of this Rugged floor tour Swivel castor:

- ✓ over big stones
- ✓ manipulation
- ✓ absorbing

LIV SYSTEMS for rough floors Swivel castor + black pneumatic Ø260 x W85mm for 150kg Prod ID: 91122

ID 91122: Castor overall height 290 mm | 4 mounting holes with distance 140x105 mm | Wheel with roller bearing and black pneumatic with hardness 80 ° Shore A | Rugged floor tour, flexible over big stones, simple manipulation, Shock absorbing

Product information

- Article code 2-449 ISO
- SKU 91122
- EAN 3838461911224

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)



Product description

for rough floors Wheel with plain bearing and black pneumatic with hardness 80 ° Shore A on polypropylene

Wheel diameter x width: 260 x 85 mm

Axle hole: 20 mm

Hub length: 75 mm

Approved and tested load capacity

Dynamic 150 kg

Static 180 kg

Temperature range:

Continuous operation: -5 | +60°C

Short (10 min) exposure: -5 | +60°C

Advantages of this Rugged floor tour wheel:

- ✓ over big stones
- ✓ manipulation
- ✓ absorbing


LIV SYSTEMS for rough floors wheel + black pneumatic Ø260 x W85mm for 150kg Prod ID: 64107

ID 64107: for rough floors Wheel with plain bearing and black pneumatic with hardness 80 ° Shore A on polypropylene | Axle hole: 20 mm | Hub length: 75 mm | Rugged floor tour, flexible over big stones, simple manipulation, Shock absorbing

Product information

- Article code 2-638 ISO
- SKU 64107
- EAN 3838461641077

Specifications

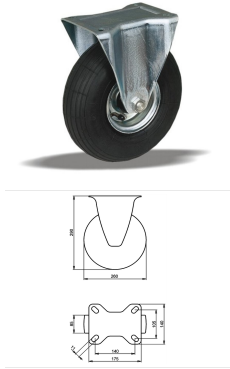

Product description

for rough floors Fixed castor with an overall height of 290 mm

Wheel diameter x width: 260 x 85 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 140x105 mm and top plate outer dimensions: 175x140 mm

Wheel with roller bearing and black pneumatic with hardness 80 ° Shore A on steel rim with electrogalvanization zinc plating anti-corrosion protection Cr6-free.

Approved and tested load capacity

Dynamic 200 kg

Static 250 kg

Temperature range:

Continuous operation: -5 | +60°C

Short (10 min) exposure: -5 | +60°C

Advantages of this Camel Trophy trip Fixed castor:

- ✓ absorbing
- ✓ pass the obstacle
- ✓ uneven ground

LIV SYSTEMS for rough floors Fixed castor + black pneumatic Ø260 x W85mm for 200kg Prod ID: 30175

ID 30175: Castor overall height 290 mm | 4 mounting holes with distance 140x105 mm | Wheel with roller bearing and black pneumatic with hardness 80 ° Shore A | Camel Trophy trip, Shock absorbing, easily pass the obstacle, for uneven ground

Product information

- Article code 2-620 A
- SKU 30175
- EAN 3838461301759

Specifications

The result of our quality is maximum performance!



Product description

for rough floors Wheel with roller bearing and black pneumatic with hardness 80 ° Shore A on polypropylene

Wheel diameter x width: 260 x 85 mm

Axle hole: 20 mm

Hub length: 75 mm

Approved and tested load capacity

Dynamic 150 kg

Static 180 kg

Temperature range:

Continuous operation: -5 | +60°C

Short (10 min) exposure: -5 | +60°C

Advantages of this Rugged floor tour wheel:

- ✓ over big stones
- ✓ manipulation
- ✓ absorbing


LIV SYSTEMS for rough floors wheel + black pneumatic Ø260 x W85mm for 150kg Prod ID: 64102

ID 64102:for rough floors Wheel with roller bearing and black pneumatic with hardness 80 ° Shore A on polypropylene | Axle hole: 20 mm | Hub length: 75 mm | Rugged floor tour, flexible over big stones, simple manipulation, Shock absorbing

Product information

- Article code 2-636 ISO
- SKU 64102
- EAN 3838461641022

Specifications

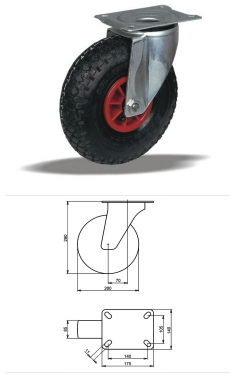

Product description

for rough floors Swivel castor with an overall height of 290 mm

Wheel diameter x width: 260 x 85 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 140x105 mm and top plate outer dimensions: 175x140 mm

Wheel with plain bearing and black pneumatic with hardness 80 ° Shore A on polypropylene.

Approved and tested load capacity

Dynamic 150 kg

Static 180 kg

Temperature range:

Continuous operation: -5 | +60°C

Short (10 min) exposure: -5 | +60°C

Advantages of this Rugged floor tour Swivel castor:

- ✓ over big stones
- ✓ manipulation
- ✓ absorbing

LIV SYSTEMS for rough floors Swivel castor + black pneumatic Ø260 x W85mm for 150kg Prod ID: 91123


ID 91123: Castor overall height 290 mm | 4 mounting holes with distance 140x105 mm | Wheel with plain bearing and black pneumatic with hardness 80 ° Shore A | Rugged floor tour, flexible over big stones, simple manipulation, Shock absorbing

Product information

- Article code 2-452 ISO
- SKU 91123
- EAN 3838461911231

Specifications

The result of our quality is maximum performance!

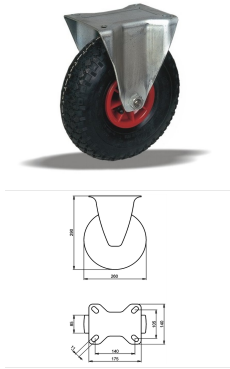

Product description

for rough floors Fixed castor with an overall height of 290 mm

Wheel diameter x width: 260 x 85 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 140x105 mm and top plate outer dimensions: 175x140 mm

Wheel with plain bearing and black pneumatic with hardness 80 ° Shore A on polypropylene.

Approved and tested load capacity

Dynamic 150 kg

Static 180 kg

Temperature range:

Continuous operation: -5 | +60°C

Short (10 min) exposure: -5 | +60°C

Advantages of this Rugged floor tour Fixed castor:

- ✓ over big stones
- ✓ manipulation
- ✓ absorbing

LIV SYSTEMS for rough floors Fixed castor + black pneumatic Ø260 x W85mm for 150kg Prod ID: 91125


ID 91125: Castor overall height 290 mm | 4 mounting holes with distance 140x105 mm | Wheel with plain bearing and black pneumatic with hardness 80 ° Shore A | Rugged floor tour, flexible over big stones, simple manipulation, Shock absorbing

Product information

- Article code 2-457 ISO
- SKU 91125
- EAN 3838461911255

Specifications

The result of our quality is maximum performance!

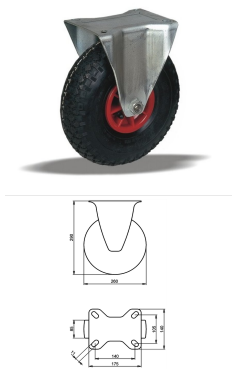

Product description

for rough floors Fixed castor with an overall height of 290 mm

Wheel diameter x width: 260 x 85 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 140x105 mm and top plate outer dimensions: 175x140 mm

Wheel with roller bearing and black pneumatic with hardness 80 ° Shore A on polypropylene.

Approved and tested load capacity

Dynamic 150 kg

Static 180 kg

Temperature range:

Continuous operation: -5 | +60°C

Short (10 min) exposure: -5 | +60°C

Advantages of this Rugged floor tour Fixed castor:

- ✓ over big stones
- ✓ manipulation
- ✓ absorbing

LIV SYSTEMS for rough floors Fixed castor + black pneumatic Ø260 x W85mm for 150kg Prod ID: 91124

ID 91124: Castor overall height 290 mm | 4 mounting holes with distance 140x105 mm | Wheel with roller bearing and black pneumatic with hardness 80 ° Shore A | Rugged floor tour, flexible over big stones, simple manipulation, Shock absorbing

Product information

- Article code 2-453 ISO
- SKU 91124
- EAN 3838461911248

Specifications

The result of our quality is maximum performance!

Алматы (7273)495-231
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(7172)727-132

Киргизия +996(312)96-26-47

<https://liv.nt-rt.ru/> || vis@nt-rt.ru