

Алматы (7273)495-231
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-57
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35


Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(7172)727-132

Киргизия +996(312)96-26-47

<https://liv.nt-rt.ru/> || vis@nt-rt.ru

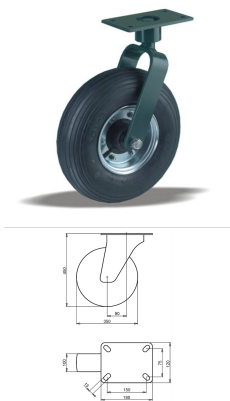

Product description

for rough floors Swivel castor with an overall height of 450 mm

Wheel diameter x width: 350 x 100 mm

Top plate with 4 mounting holes of 13 mm, mounting hole distance 150x75 mm and top plate outer dimensions: 190x120 mm

Wheel with ball bearing and black pneumatic with hardness 80 ° Shore A on steel rim with electrogalvanization zinc plating anti-corrosion protection Cr6-free.

Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

Temperature range:

Continuous operation: -5 | +60°C

Short (10 min) exposure: -5 | +60°C

Advantages of this Macadam ride Swivel castor:

- ✓ rolls over obstacles
- ✓ ground adapting
- ✓ to manipulate

LIV SYSTEMS for rough floors Swivel castor + black pneumatic Ø350 x W100mm for 300kg Prod ID: 31361


ID 31361: Castor overall height 450 mm | 4 mounting holes with distance 150x75 mm | Wheel with ball bearing and black pneumatic with hardness 80 ° Shore A | Macadam ride, easily rolls over obstacles, effortless ground adapting, simple to manipulate

Product information

- Article code 2-516
- SKU 31361
- EAN 3838461313615

Specifications

The result of our quality is maximum performance!

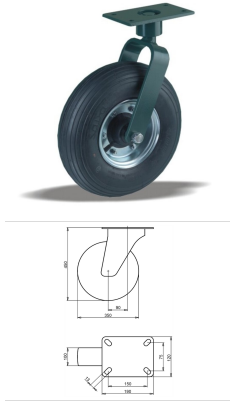

Product description

for rough floors Swivel castor with an overall height of 450 mm

Wheel diameter x width: 350 x 100 mm

Top plate with 4 mounting holes of 13 mm, mounting hole distance 150x75 mm and top plate outer dimensions: 190x120 mm

Wheel with ball bearing and black rubber tyre with hardness 80 ° Shore A on steel rim with electrogalvanization zinc plating anti-corrosion protection Cr6-free.

Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

Advantages of this Off floor trip Swivel castor:

- ✓ rolls over obstacles
- ✓ ground adapting
- ✓ to manipulate

LIV SYSTEMS for rough floors Swivel castor + black rubber tyre Ø350 x W100mm for 300kg Prod ID: 22950

ID 22950: Castor overall height 450 mm | 4 mounting holes with distance 150x75 mm | Wheel with ball bearing and black rubber tyre with hardness 80 ° Shore A | Off floor trip, easily rolls over obstacles, effortless ground adapting, simple to manipulate

Product information

- Article code 2-269
- SKU 22950
- EAN 3838461229503

Specifications

The result of our quality is maximum performance!



Product description

for rough floors Wheel with ball bearing and black pneumatic with hardness 80 ° Shore A on steel rim with electrogalvanization zinc plating anti-corrosion protection Cr6-free

Wheel diameter x width: 350 x 100 mm

Axle hole: 25 mm

Hub length: 56 mm

Approved and tested load capacity

Dynamic 150 kg

Static 180 kg

Temperature range:

Continuous operation: -5 | +60°C

Short (10 min) exposure: -5 | +60°C

Advantages of this Macadam ride wheel:

- ✓ rolls over obstacles
- ✓ ground adapting
- ✓ to manipulate


LIV SYSTEMS for rough floors wheel + black pneumatic Ø350 x W100mm for 150kg Prod ID: 57806

ID 57806: for rough floors Wheel with ball bearing and black pneumatic with hardness 80 ° Shore A on steel rim with electrogalvanization zinc plating anti-corrosion protection Cr6-free | Axle hole: 25 mm | Hub length: 56 mm |

Macadam ride, easily rolls ov

Product information

- Article code 2-300
- SKU 57806
- EAN 3838461578069

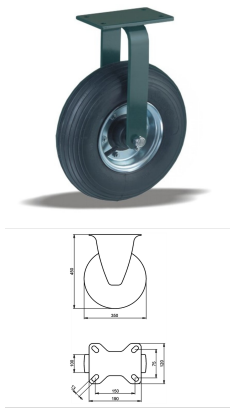

Product description

for rough floors Fixed castor with an overall height of 450 mm

Wheel diameter x width: 350 x 100 mm

Top plate with 4 mounting holes of 13 mm, mounting hole distance 150x75 mm and top plate outer dimensions: 190x120 mm

Wheel with ball bearing and black rubber tyre with hardness 80 ° Shore A on steel rim with electrogalvanization zinc plating anti-corrosion protection Cr6-free.

Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

Advantages of this Off floor trip Fixed castor:

- ✓ rolls over obstacles
- ✓ ground adapting
- ✓ to manipulate

LIV SYSTEMS for rough floors Fixed castor + black rubber tyre Ø350 x W100mm for 300kg Prod ID: 22827

ID 22827: Castor overall height 450 mm | 4 mounting holes with distance 150x75 mm | Wheel with ball bearing and black rubber tyre with hardness 80 ° Shore A | Off floor trip, easily rolls over obstacles, effortless ground adapting, simple to manipulate

Product information

- Article code 2-239
- SKU 22827
- EAN 3838461228278

Specifications

The result of our quality is maximum performance!



Product description

for rough floors Wheel with ball bearing and black pneumatic with hardness 80 ° Shore A on steel rim with electrogalvanization zinc plating anti-corrosion protection Cr6-free

Wheel diameter x width: 350 x 100 mm

Axle hole: 25 mm

Hub length: 56 mm

Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

Temperature range:

Continuous operation: -5 | +60°C

Short (10 min) exposure: -5 | +60°C

Advantages of this Macadam ride wheel:

- ✓ rolls over obstacles
- ✓ ground adapting
- ✓ to manipulate

LIV SYSTEMS for rough floors wheel + black pneumatic Ø350 x W100mm for 300kg Prod ID: 22898

ID 22898:for rough floors Wheel with ball bearing and black pneumatic with hardness 80 ° Shore A on steel rim with electrogalvanization zinc plating anti-corrosion protection Cr6-free | Axle hole: 25 mm | Hub length: 56 mm |

Macadam ride, easily rolls ov

Product information

- Article code 2-298
- SKU 22898
- EAN 3838461228988



Product description

for rough floors Wheel with plain bearing and black pneumatic with hardness 80 ° Shore A on steel rim with electrogalvanization zinc plating anti-corrosion protection Cr6-free

Wheel diameter x width: 350 x 100 mm

Axle hole: 25 mm

Hub length: 67 mm

Approved and tested load capacity

Dynamic 150 kg

Static 180 kg

Temperature range:

Continuous operation: -5 | +60°C

Short (10 min) exposure: -5 | +60°C

Advantages of this Macadam ride wheel:


- ✓ rolls over obstacles
- ✓ ground adapting
- ✓ to manipulate

LIV SYSTEMS for rough floors wheel + black pneumatic Ø350 x W100mm for 150kg Prod ID: 28226

ID 28226: for rough floors Wheel with plain bearing and black pneumatic with hardness 80 ° Shore A on steel rim with electrogalvanization zinc plating anti-corrosion protection Cr6-free | Axle hole: 25 mm | Hub length: 67 mm | Macadam ride, easily rolls o

Product information

- Article code 2-283
- SKU 28226
- EAN 3838461282263

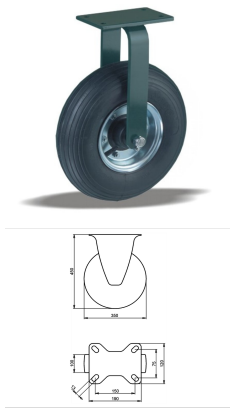

Product description

for rough floors Fixed castor with an overall height of 450 mm

Wheel diameter x width: 350 x 100 mm

Top plate with 4 mounting holes of 13 mm, mounting hole distance 150x75 mm and top plate outer dimensions: 190x120 mm

Wheel with ball bearing and black pneumatic with hardness 80 ° Shore A on steel rim with electrogalvanization zinc plating anti-corrosion protection Cr6-free.

Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

Temperature range:

Continuous operation: -5 | +60°C

Short (10 min) exposure: -5 | +60°C

Advantages of this Macadam ride Fixed castor:

- ✓ rolls over obstacles
- ✓ ground adapting
- ✓ to manipulate

LIV SYSTEMS for rough floors Fixed castor + black pneumatic Ø350 x W100mm for 300kg Prod ID: 31362

ID 31362: Castor overall height 450 mm | 4 mounting holes with distance 150x75 mm | Wheel with ball bearing and black pneumatic with hardness 80 ° Shore A | Macadam ride, easily rolls over obstacles, effortless ground adapting, simple to manipulate

Product information

- Article code 2-517
- SKU 31362
- EAN 3838461313622

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)



Product description

for rough floors Wheel with ball bearing and black rubber tyre with hardness 80 ° Shore A on steel rim with electrogalvanization zinc plating anti-corrosion protection Cr6-free

Wheel diameter x width: 350 x 100 mm

Axle hole: 25 mm

Hub length: 56 mm

Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

Advantages of this Off floor trip wheel:

- ✓ rolls over obstacles
- ✓ ground adapting
- ✓ to manipulate

LIV SYSTEMS for rough floors wheel + black rubber tyre Ø350 x W100mm for 300kg Prod ID: 22899

ID 22899: for rough floors Wheel with ball bearing and black rubber tyre with hardness 80 ° Shore A on steel rim with electrogalvanization zinc plating anti-corrosion protection Cr6-free | Axle hole: 25 mm | Hub length: 56 mm | Off floor trip, easily rolls

Product information

- Article code 2-213
- SKU 22899
- EAN 3838461228995

Алматы (7273)495-231
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(7172)727-132

Киргизия +996(312)96-26-47