

Product description

standard Fixed castor with an overall height of 128 mm

Wheel diameter x width: 100 x 32 mm

Top plate with 4 mounting holes of 9 mm, mounting hole distance 80x60 mm and top plate outer dimensions: 105x85 mm

Wheel with plain bearing and injection-moulded polyurethane with hardness 92 ° shore A on polyamide.

Approved and tested load capacity

Dynamic 150 kg

Static 180 kg

Temperature range:

Continuous operation: -20 | +80°C

Short (10 min) exposure: -40 | +100°C

Advantages of this Jump floor champion Fixed castor:

- ✓ stoney floor
- ✓ -proof
- ✓ high temperature differences

LIV SYSTEMS standard Fixed castor + injection-moulded polyurethane Ø100 x W32mm for 150kg Prod ID: 40454

ID 40454: Castor overall height 128 mm | 4 mounting holes with distance 80x60 mm | Wheel with plain bearing and injection-moulded polyurethane with hardness 92 ° shore

A | Jump floor champion, on stoney floor, cuts-proof, for high temperature difference

Product information

- Article code 2-051-20D
- SKU 40454
- EAN 3838461404542

Алматы (7273)495-231
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35


Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Россия +7(495)268-04-70

Казахстан +7(7172)727-132

Киргизия +996(312)96-26-47

<https://liv.nt-rt.ru/> || vis@nt-rt.ru

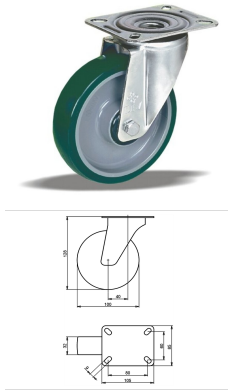

Product description

standard Swivel castor with an overall height of 128 mm

Wheel diameter x width: 100 x 32 mm

Top plate with 4 mounting holes of 9 mm, mounting hole distance 80x60 mm and top plate outer dimensions: 105x85 mm

Wheel with ball bearing and injection-moulded polyurethane with hardness 92 ° shore A on polyamide.

Approved and tested load capacity

Dynamic 150 kg

Static 180 kg

Temperature range:

Continuous operation: -25 | +55°C

Short (10 min) exposure: -30 | +55°C

Advantages of this Jump floor champion Swivel castor:

- ✓ stoney floor
- ✓-proof
- ✓ high temperature differences

LIV SYSTEMS standard Swivel castor + injection-moulded polyurethane Ø100 x W32mm for 150kg Prod ID: 40503

ID 40503: Castor overall height 128 mm | 4 mounting holes with distance 80x60 mm | Wheel with ball bearing and injection-moulded polyurethane with hardness 92 ° shore A
| Jump floor champion, on stoney floor, cuts-proof, for high temperature differences

Product information


- Article code 2-052-20K
- SKU 40503
- EAN 3838461405037

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

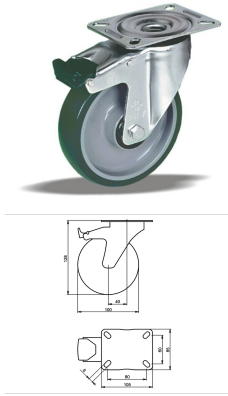

Product description

standard Swivel castor with brake with an overall height of 128 mm
 Wheel diameter x width: 100 x 32 mm
 Top plate with 4 mounting holes of 9 mm, mounting hole distance 80x60 mm and top plate outer dimensions: 105x85 mm
 Wheel with ball bearing and injection-moulded polyurethane with hardness 92 ° shore A on polyamide
 the double brake system, brakes the turning of the wheel and the swivel rotation.

Approved and tested load capacity

Dynamic 150 kg
 Static 180 kg

Temperature range:

Continuous operation: -25 | +55°C
 Short (10 min) exposure: -30 | +55°C

Advantages of this Jump floor champion Swivel castor with brake:

- ✓ stoney floor
- ✓-proof
- ✓ high temperature differences

LIV SYSTEMS standard Swivel castor with brake + injection-moulded polyurethane Ø100 x W32mm for 150kg Prod ID: 40543

ID 40543: Castor overall height 128 mm | 4 mounting holes with distance 80x60 mm | Wheel with ball bearing and injection-moulded polyurethane with hardness 92 ° shore A
 | The double brake system, brakes the turning of the wheel and the swivel rotation.

Product information

- Article code 2-053-20K
- SKU 40543
- EAN 3838461405433

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)



Product description

standard Wheel with ball bearing and injection-moulded polyurethane with hardness 92 ° shore A on polyamide

Wheel diameter x width: 100 x 32 mm

Axle hole: 12 mm

Hub length: 44 mm

Approved and tested load capacity

Dynamic 150 kg

Static 180 kg

Temperature range:

Continuous operation: -25 | +55°C

Short (10 min) exposure: -30 | +55°C

Advantages of this Jump floor champion wheel:


- ✓ stoney floor
- ✓-proof
- ✓ high temperature differences

LIV SYSTEMS standard wheel + injection-moulded polyurethane Ø100 x W32mm for 150kg Prod ID: 40423

ID 40423: standard Wheel with ball bearing and injection-moulded polyurethane with hardness 92 ° shore A on polyamide | Axle hole: 12 mm | Hub length: 44 mm | Jump floor champion, on stoney floor, cuts-proof, for high temperature differences

Product information

- Article code 2-050-20K
- SKU 40423
- EAN 3838461404238

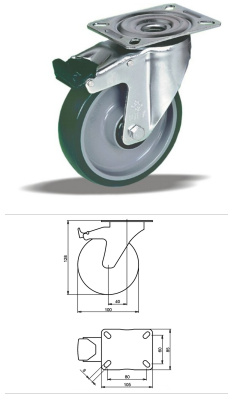

Product description

standard Swivel castor with brake with an overall height of 128 mm
 Wheel diameter x width: 100 x 32 mm
 Top plate with 4 mounting holes of 9 mm, mounting hole distance 80x60 mm and top plate outer dimensions: 105x85 mm
 Wheel with roller bearing and injection-moulded polyurethane with hardness 92 ° shore A on polyamide
 the double brake system, brakes the turning of the wheel and the swivel rotation.

Approved and tested load capacity

Dynamic 150 kg
 Static 180 kg

Temperature range:

Continuous operation: -25 | +55°C
 Short (10 min) exposure: -30 | +55°C

Advantages of this Jump floor champion Swivel castor with brake:

- ✓ stoney floor
- ✓-proof
- ✓ high temperature differences

LIV SYSTEMS standard Swivel castor with brake + injection-moulded polyurethane Ø100 x W32mm for 150kg Prod ID: 40535

ID 40535: Castor overall height 128 mm | 4 mounting holes with distance 80x60 mm | Wheel with roller bearing and injection-moulded polyurethane with hardness 92 ° shore A | The double brake system, brakes the turning of the wheel and the swivel rotation

Product information


- Article code 2-053-20V
- SKU 40535
- EAN 3838461405358

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)



Product description

standard Wheel with plain bearing and injection-moulded polyurethane with hardness 92 ° shore A on polyamide

Wheel diameter x width: 100 x 32 mm

Axle hole: 8,5 mm

Hub length: 44 mm

Approved and tested load capacity

Dynamic 150 kg

Static 180 kg

Temperature range:

Continous operation: -25 | +55°C

Short (10 min) exposure: -30 | +55°C

Advantages of this Jump floor champion wheel:


- ✓ stoney floor
- ✓-proof
- ✓ high temperature differences

LIV SYSTEMS standard wheel + injection-moulded polyurethane Ø100 x W32mm for 150kg Prod ID: 40414

ID 40414:standard Wheel with plain bearing and injection-moulded polyurethane with hardness 92 ° shore A on polyamide | Axle hole: 8,5 mm | Hub length: 44 mm | Jump floor champion, on stoney floor, cuts-proof, for high temperature differences

Product information

- Article code 2-050-20D
- SKU 40414
- EAN 3838461404146



Product description

standard Wheel with roller bearing and injection-moulded polyurethane with hardness 92 ° shore A on polyamide

Wheel diameter x width: 100 x 32 mm

Axle hole: 8,5 mm

Hub length: 44 mm

Approved and tested load capacity

Dynamic 150 kg

Static 180 kg

Temperature range:

Continuous operation: -25 | +55°C

Short (10 min) exposure: -30 | +55°C

Advantages of this Jump floor champion wheel:


- ✓ stoney floor
- ✓-proof
- ✓ high temperature differences

LIV SYSTEMS standard wheel + injection-moulded polyurethane Ø100 x W32mm for 150kg Prod ID: 40415

ID 40415: standard Wheel with roller bearing and injection-moulded polyurethane with hardness 92 ° shore A on polyamide | Axle hole: 8,5 mm | Hub length: 44 mm | Jump floor champion, on stoney floor, cuts-proof, for high temperature differences

Product information

- Article code 2-050-20V
- SKU 40415
- EAN 3838461404153

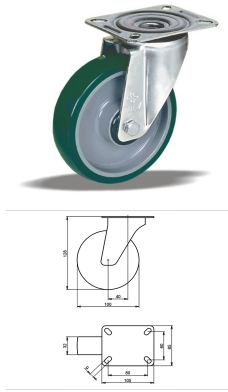

Product description

standard Swivel castor with an overall height of 128 mm

Wheel diameter x width: 100 x 32 mm

Top plate with 4 mounting holes of 9 mm, mounting hole distance 80x60 mm and top plate outer dimensions: 105x85 mm

Wheel with plain bearing and injection-moulded polyurethane with hardness 92 ° shore A on polyamide.

Approved and tested load capacity

Dynamic 150 kg

Static 180 kg

Temperature range:

Continuous operation: -25 | +55°C

Short (10 min) exposure: -30 | +55°C

Advantages of this Jump floor champion Swivel castor:

- ✓ stoney floor
- ✓-proof
- ✓ high temperature differences

LIV SYSTEMS standard Swivel castor + injection-moulded polyurethane Ø100 x W32mm for 150kg Prod ID: 40494

ID 40494: Castor overall height 128 mm | 4 mounting holes with distance 80x60 mm | Wheel with plain bearing and injection-moulded polyurethane with hardness 92 ° shore A | Jump floor champion, on stoney floor, cuts-proof, for high temperature difference

Product information


- Article code 2-052-20D
- SKU 40494
- EAN 3838461404948

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

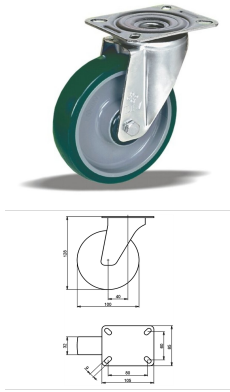

Product description

standard Swivel castor with an overall height of 128 mm

Wheel diameter x width: 100 x 32 mm

Top plate with 4 mounting holes of 9 mm, mounting hole distance 80x60 mm and top plate outer dimensions: 105x85 mm

Wheel with roller bearing and injection-moulded polyurethane with hardness 92 ° shore A on polyamide.

Approved and tested load capacity

Dynamic 150 kg

Static 180 kg

Temperature range:

Continuous operation: -25 | +55°C

Short (10 min) exposure: -30 | +55°C

Advantages of this Jump floor champion Swivel castor:

- ✓ stoney floor
- ✓-proof
- ✓ high temperature differences

LIV SYSTEMS standard Swivel castor + injection-moulded polyurethane Ø100 x W32mm for 150kg Prod ID: 40495

ID 40495: Castor overall height 128 mm | 4 mounting holes with distance 80x60 mm | Wheel with roller bearing and injection-moulded polyurethane with hardness 92 ° shore A | Jump floor champion, on stoney floor, cuts-proof, for high temperature differenc

Product information


- Article code 2-052-20V
- SKU 40495
- EAN 3838461404955

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

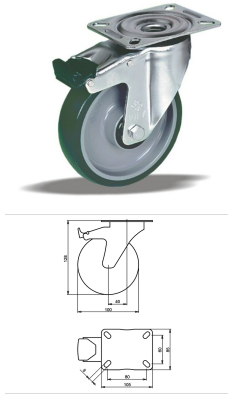

Product description

standard Swivel castor with brake with an overall height of 128 mm
 Wheel diameter x width: 100 x 32 mm
 Top plate with 4 mounting holes of 9 mm, mounting hole distance 80x60 mm and top plate outer dimensions: 105x85 mm
 Wheel with plain bearing and injection-moulded polyurethane with hardness 92 ° shore A on polyamide
 the double brake system, brakes the turning of the wheel and the swivel rotation.

Approved and tested load capacity

Dynamic 150 kg
 Static 180 kg

Temperature range:

Continuous operation: -25 | +55°C
 Short (10 min) exposure: -30 | +55°C

Advantages of this Jump floor champion Swivel castor with brake:

- ✓ stoney floor
- ✓-proof
- ✓ high temperature differences

LIV SYSTEMS standard Swivel castor with brake + injection-moulded polyurethane Ø100 x W32mm for 150kg Prod ID: 40534

ID 40534: Castor overall height 128 mm | 4 mounting holes with distance 80x60 mm | Wheel with plain bearing and injection-moulded polyurethane with hardness 92 ° shore A | The double brake system, brakes the turning of the wheel and the swivel rotation.

Product information


- Article code 2-053-20D
- SKU 40534
- EAN 3838461405341

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

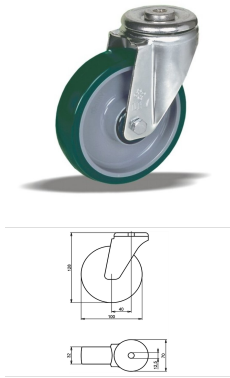

Product description

standard Swivel castor with an overall height of 128 mm

Wheel diameter x width: 100 x 32 mm

Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 70 mm

Wheel with plain bearing and injection-moulded polyurethane with hardness 92 ° shore A on polyamide.

Approved and tested load capacity

Dynamic 150 kg

Static 180 kg

Temperature range:

Continuous operation: -25 | +55°C

Short (10 min) exposure: -40 | +100°C

Advantages of this Jump floor champion Swivel castor:

- ✓ stoney floor
- ✓-proof
- ✓ high temperature differences

LIV SYSTEMS standard Swivel castor + injection-moulded polyurethane Ø100 x W32mm for 150kg Prod ID: 40574

ID 40574: Castor overall height 128 mm | 4 mounting holes with distance #\$\$ mm | Wheel with plain bearing and injection-moulded polyurethane with hardness 92 ° shore A
| Jump floor champion, on stoney floor, cuts-proof, for high temperature differences

Product information


- Article code 2-054-20D
- SKU 40574
- EAN 3838461405747

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

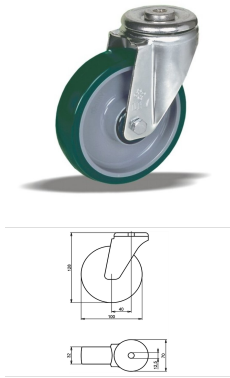

Product description

standard Swivel castor with an overall height of 128 mm

Wheel diameter x width: 100 x 32 mm

Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 70 mm

Wheel with roller bearing and injection-moulded polyurethane with hardness 92 ° shore A on polyamide.

Approved and tested load capacity

Dynamic 150 kg

Static 180 kg

Temperature range:

Continuous operation: -20 | +80°C

Short (10 min) exposure: -40 | +100°C

Advantages of this Jump floor champion Swivel castor:

- ✓ stoney floor
- ✓-proof
- ✓ high temperature differences

LIV SYSTEMS standard Swivel castor + injection-moulded polyurethane Ø100 x W32mm for 150kg Prod ID: 40575

ID 40575: Castor overall height 128 mm | 4 mounting holes with distance #\$\$ mm | Wheel with roller bearing and injection-moulded polyurethane with hardness 92 ° shore A
| Jump floor champion, on stoney floor, cuts-proof, for high temperature differences

Product information


- Article code 2-054-20V
- SKU 40575
- EAN 3838461405754

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

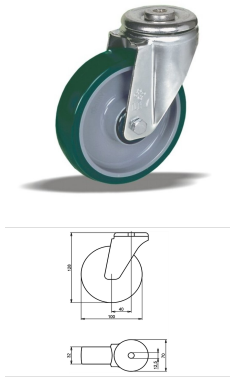

Product description

standard Swivel castor with an overall height of 128 mm

Wheel diameter x width: 100 x 32 mm

Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 70 mm

Wheel with ball bearing and injection-moulded polyurethane with hardness 92 ° shore A on polyamide.

Approved and tested load capacity

Dynamic 150 kg

Static 180 kg

Temperature range:

Continuous operation: -20 | +80°C

Short (10 min) exposure: -40 | +100°C

Advantages of this Jump floor champion Swivel castor:

- ✓ stoney floor
- ✓-proof
- ✓ high temperature differences

LIV SYSTEMS standard Swivel castor + injection-moulded polyurethane Ø100 x W32mm for 150kg Prod ID: 40583

ID 40583: Castor overall height 128 mm | 4 mounting holes with distance #\$\$ mm | Wheel with ball bearing and injection-moulded polyurethane with hardness 92 ° shore A | Jump floor champion, on stoney floor, cuts-proof, for high temperature differences

Product information


- Article code 2-054-20K
- SKU 40583
- EAN 3838461405839

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

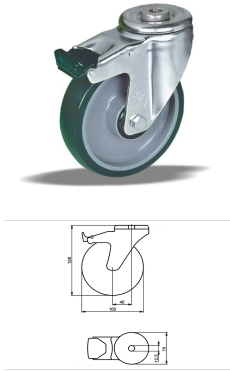

Product description

standard Swivel castor with brake with an overall height of 128 mm
 Wheel diameter x width: 100 x 32 mm
 Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 70 mm
 Wheel with plain bearing and injection-moulded polyurethane with hardness 92 ° shore A on polyamide
 the double brake system, brakes the turning of the wheel and the swivel rotation.

Approved and tested load capacity

Dynamic 150 kg
 Static 180 kg

Temperature range:

Continious operation: -20 | +80°C
 Short (10 min) exposure: -40 | +100°C

Advantages of this Jump floor champion Swivel castor with brake:

- ✓ stoney floor
- ✓-proof
- ✓ high temperature differences

LIV SYSTEMS standard Swivel castor with brake + injection-moulded polyurethane Ø100 x W32mm for 150kg Prod ID: 40614

ID 40614: Castor overall height 128 mm | 4 mounting holes with distance #\$\$ mm | Wheel with plain bearing and injection-moulded polyurethane with hardness 92 ° shore A
 | The double brake system, brakes the turning of the wheel and the swivel rotation. |

Product information


- Article code 2-055-20D
- SKU 40614
- EAN 3838461406140

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

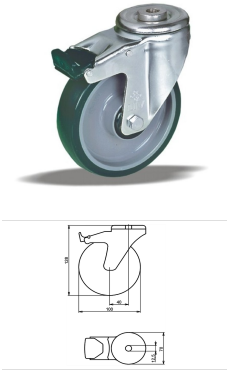

Product description

standard Swivel castor with brake with an overall height of 128 mm
 Wheel diameter x width: 100 x 32 mm
 Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 70 mm
 Wheel with roller bearing and injection-moulded polyurethane with hardness 92 ° shore A on polyamide
 the double brake system, brakes the turning of the wheel and the swivel rotation.

Approved and tested load capacity

Dynamic 150 kg
 Static 180 kg

Temperature range:

Continious operation: -20 | +80°C
 Short (10 min) exposure: -40 | +100°C

Advantages of this Jump floor champion Swivel castor with brake:

- ✓ stoney floor
- ✓-proof
- ✓ high temperature differences

LIV SYSTEMS standard Swivel castor with brake + injection-moulded polyurethane Ø100 x W32mm for 150kg Prod ID: 40615

ID 40615: Castor overall height 128 mm | 4 mounting holes with distance #\$\$ mm | Wheel with roller bearing and injection-moulded polyurethane with hardness 92 ° shore A
 | The double brake system, brakes the turning of the wheel and the swivel rotation.

Product information


- Article code 2-055-20V
- SKU 40615
- EAN 3838461406157

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

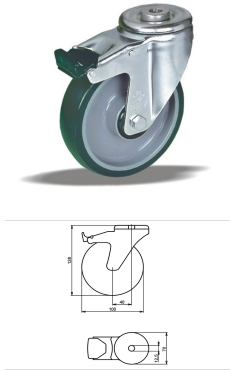

Product description

standard Swivel castor with brake with an overall height of 128 mm
 Wheel diameter x width: 100 x 32 mm
 Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 70 mm
 Wheel with ball bearing and injection-moulded polyurethane with hardness 92 ° shore A on polyamide
 the double brake system, brakes the turning of the wheel and the swivel rotation.

Approved and tested load capacity

Dynamic 150 kg
 Static 180 kg

Temperature range:

Continuous operation: -20 | +80°C
 Short (10 min) exposure: -40 | +100°C

Advantages of this Jump floor champion Swivel castor with brake:

- ✓ stoney floor
- ✓-proof
- ✓ high temperature differences

LIV SYSTEMS standard Swivel castor with brake + injection-moulded polyurethane Ø100 x W32mm for 150kg Prod ID: 40623

ID 40623: Castor overall height 128 mm | 4 mounting holes with distance #\$\$ mm | Wheel with ball bearing and injection-moulded polyurethane with hardness 92 ° shore A | The double brake system, brakes the turning of the wheel and the swivel rotation. |

Product information


- Article code 2-055-20K
- SKU 40623
- EAN 3838461406232

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

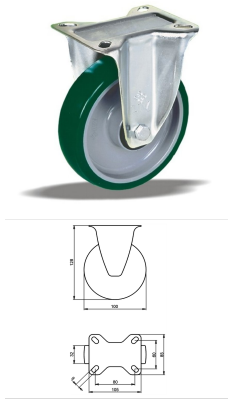

Product description

standard Fixed castor with an overall height of 128 mm

Wheel diameter x width: 100 x 32 mm

Top plate with 4 mounting holes of 9 mm, mounting hole distance 80x60 mm and top plate outer dimensions: 105x85 mm

Wheel with roller bearing and injection-moulded polyurethane with hardness 92 ° shore A on polyamide.

Approved and tested load capacity

Dynamic 150 kg

Static 180 kg

Temperature range:

Continuous operation: -20 | +80°C

Short (10 min) exposure: -40 | +100°C

Advantages of this Jump floor champion Fixed castor:

- ✓ stoney floor
- ✓-proof
- ✓ high temperature differences

LIV SYSTEMS standard Fixed castor + injection-moulded polyurethane Ø100 x W32mm for 150kg Prod ID: 40455

ID 40455: Castor overall height 128 mm | 4 mounting holes with distance 80x60 mm | Wheel with roller bearing and injection-moulded polyurethane with hardness 92 ° shore A | Jump floor champion, on stoney floor, cuts-proof, for high temperature differenc

Product information


- Article code 2-051-20V
- SKU 40455
- EAN 3838461404559

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

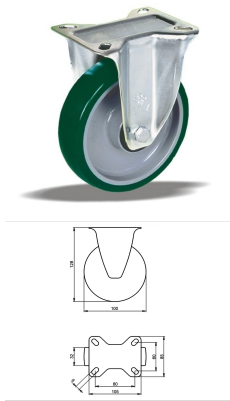

Product description

standard Fixed castor with an overall height of 128 mm

Wheel diameter x width: 100 x 32 mm

Top plate with 4 mounting holes of 9 mm, mounting hole distance 80x60 mm and top plate outer dimensions: 105x85 mm

Wheel with ball bearing and injection-moulded polyurethane with hardness 92 ° shore A on polyamide.

Approved and tested load capacity

Dynamic 150 kg

Static 180 kg

Temperature range:

Continuous operation: -20 | +80°C

Short (10 min) exposure: -40 | +100°C

Advantages of this Jump floor champion Fixed castor:

- ✓ stoney floor
- ✓ -proof
- ✓ high temperature differences

LIV SYSTEMS standard Fixed castor + injection-moulded polyurethane Ø100 x W32mm for 150kg Prod ID: 40463

ID 40463: Castor overall height 128 mm | 4 mounting holes with distance 80x60 mm | Wheel with ball bearing and injection-moulded polyurethane with hardness 92 ° shore A | Jump floor champion, on stoney floor, cuts-proof, for high temperature differences

Product information

- Article code 2-051-20K
- SKU 40463
- EAN 3838461404634

Алматы (7273)495-231
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Саратов (845)249-38-78
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(7172)727-132

Киргизия +996(312)96-26-47

<https://liv.nt-rt.ru/> || vis@nt-rt.ru