



## Product description

stainless steel Swivel castor with brake with an overall height of 232 mm

Wheel diameter x width: 200 x 50 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with ball bearing and elastic rubber tyre with hardness 70 ° Shore A on polyamide

the double brake system, brakes the turning of the wheel and the swivel rotation.

### Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

### Temperature range:

Continuous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

### Advantages of this Tile floor ride Swivel castor with brake:

- ✓ absorbing
- ✓ ride over obstacles
- ✓ to keep clean

## LIV SYSTEMS stainless steel Swivel castor with brake + elastic rubber tyre Ø200 x W50mm for 300kg Prod ID: 42255

ID 42255: Castor overall height 232 mm | 4 mounting holes with distance 105x80 mm | Wheel with ball bearing and elastic rubber tyre with hardness 70 ° Shore A | The double brake system, brakes the turning of the wheel and the swivel rotation. | Tile floor

## Product information

- Article code 2-043-40K
- SKU 42255
- EAN 3838461422553

**Алматы** (7273)495-231  
**Ангарск** (3955)60-70-56  
**Архангельск** (8182)63-90-72  
**Астрахань** (8512)99-46-04  
**Барнаул** (3852)73-04-60  
**Белгород** (4722)40-23-64  
**Благовещенск** (4162)22-76-07  
**Брянск** (4832)59-03-52  
**Владивосток** (423)249-28-31  
**Владикавказ** (8672)28-90-48  
**Владимир** (4922)49-43-18  
**Волгоград** (844)278-03-48  
**Вологда** (8172)26-41-59  
**Воронеж** (473)204-51-73  
**Екатеринбург** (343)384-55-89

**Иваново** (4932)77-34-06  
**Ижевск** (3412)26-03-58  
**Иркутск** (395)279-98-46  
**Казань** (843)206-01-48  
**Калининград** (4012)72-03-81  
**Калуга** (4842)92-23-67  
**Кемерово** (3842)65-04-62  
**Киров** (8332)68-02-04  
**Коломна** (4966)23-41-49  
**Кострома** (4942)77-07-48  
**Краснодар** (861)203-40-90  
**Красноярск** (391)204-63-61  
**Курск** (4712)77-13-04  
**Курган** (3522)50-90-47  
**Липецк** (4742)52-20-81

**Магнитогорск** (3519)55-03-13  
**Москва** (495)268-04-70  
**Мурманск** (8152)59-64-93  
**Набережные Челны** (8552)20-53-41  
**Нижний Новгород** (831)429-08-12  
**Новокузнецк** (3843)20-46-81  
**Ноябрьск** (3496)41-32-12  
**Новосибирск** (383)227-86-73  
**Омск** (3812)21-46-40  
**Орел** (4862)44-53-42  
**Оренбург** (3532)37-68-04  
**Пенза** (8412)22-31-16  
**Петрозаводск** (8142)55-98-37  
**Псков** (8112)59-10-37  
**Пермь** (342)205-81-47

**Ростов-на-Дону** (863)308-18-15  
**Рязань** (4912)46-61-64  
**Самара** (846)206-03-16  
**Санкт-Петербург** (812)309-46-40  
**Саратов** (845)249-38-78  
**Севастополь** (8692)22-31-93  
**Саранск** (8342)22-96-24  
**Симферополь** (3652)67-13-56  
**Смоленск** (4812)29-41-54  
**Сочи** (862)225-72-31  
**Ставрополь** (8652)20-65-13  
**Сургут** (3462)77-98-35  
**Сыктывкар** (8212)25-95-17  
**Тамбов** (4752)50-40-97  
**Тверь** (4822)63-31-35


**Тольятти** (8482)63-91-07  
**Томск** (3822)98-41-53  
**Тула** (4872)33-79-87  
**Тюмень** (3452)66-21-18  
**Ульяновск** (8422)24-23-59  
**Улан-Удэ** (3012)59-97-51  
**Уфа** (347)229-48-12  
**Хабаровск** (4212)92-98-04  
**Чебоксары** (8352)28-53-07  
**Челябинск** (351)202-03-61  
**Череповец** (8202)49-02-64  
**Чита** (3022)38-34-83  
**Якутск** (4112)23-90-97  
**Ярославль** (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(7172)727-132

Киргизия +996(312)96-26-47

<https://liv.nt-rt.ru/> || [vis@nt-rt.ru](mailto:vis@nt-rt.ru)



## Product description

stainless steel Wheel with plain bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A on polyamide

Wheel diameter x width: 200 x 50 mm

Axle hole: 12,5 mm

Hub length: 58 mm

### Approved and tested load capacity

Dynamic 500 kg

Static 620 kg

### Temperature range:

Continuous operation: -25 | +55°C

Short (10 min) exposure: -30 | +55°C

### Advantages of this No trail highway drive wheel:

- ✓ deform if stationed
- ✓ range of temperatures
- ✓ resistant

## LIV SYSTEMS stainless steel wheel + injection-moulded polyurethane tread Ø200 x W50mm for 500kg Prod ID: 43115

ID 43115: stainless steel Wheel with plain bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A on polyamide | Axle hole: 12,5 mm | Hub length: 58 mm | No trail highway drive, low deform if stationed, wide range of temperatures, oil

## Product information

- Article code 2-050-40D
- SKU 43115
- EAN 3838461431159



## Product description

stainless steel Wheel with ball bearing and elastic rubber tyre with hardness 70 ° Shore A on polyamide

Wheel diameter x width: 200 x 50 mm

Axle hole: 20 mm

Hub length: 58 mm

### Approved and tested load capacity

Dynamic 400 kg

Static 500 kg

### Temperature range:

Continuous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

### Advantages of this Tile floor ride wheel:

- ✓ absorbing
- ✓ ride over obstacles
- ✓ to keep clean


## LIV SYSTEMS stainless steel wheel + elastic rubber tyre Ø200 x W50mm for 400kg Prod ID: 42304

ID 42304: stainless steel Wheel with ball bearing and elastic rubber tyre with hardness 70 ° Shore A on polyamide |

Axle hole: 20 mm | Hub length: 58 mm | Tile floor ride, shock absorbing, smooth ride over obstacles, easy to keep clean

## Product information

- Article code 2-040-40K
- SKU 42304
- EAN 3838461423048

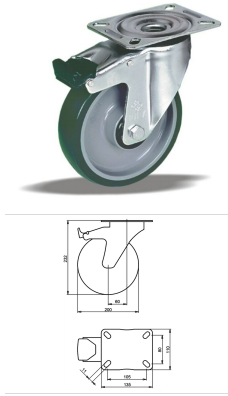

## Product description

stainless steel Swivel castor with brake with an overall height of 232 mm

Wheel diameter x width: 200 x 50 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with ball bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A on polyamide

the double brake system, brakes the turning of the wheel and the swivel rotation.

### Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

### Temperature range:

Continuous operation: -25 | +55°C

Short (10 min) exposure: -30 | +55°C

### Advantages of this No trail highway drive Swivel castor with brake:

- ✓ deformation if rarely moved
- ✓ range of temperatures
- ✓ resistant

## LIV SYSTEMS stainless steel Swivel castor with brake + injection-moulded polyurethane tread Ø200 x W50mm for 300kg Prod ID: 42193

ID 42193: Castor overall height 232 mm | 4 mounting holes with distance 105x80 mm | Wheel with ball bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A | The double brake system, brakes the turning of the wheel and the swivel rotation

## Product information


- Article code 2-053-40K
- SKU 42193
- EAN 3838461421938

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

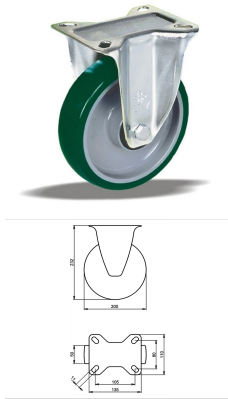

## Product description

stainless steel Fixed castor with an overall height of 232 mm

Wheel diameter x width: 200 x 50 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with roller bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A on polyamide.

### Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

### Temperature range:

Continuous operation: -25 | +55°C

Short (10 min) exposure: -30 | +55°C

### Advantages of this No trail highway drive Fixed castor:

- ✓ deformation if rarely moved
- ✓ range of temperatures
- ✓ resistant

## LIV SYSTEMS stainless steel Fixed castor + injection-moulded polyurethane tread Ø200 x W50mm for 300kg Prod

### ID: 41705

ID 41705: Castor overall height 232 mm | 4 mounting holes with distance 105x80 mm | Wheel with roller bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A | No trail highway drive, low deformation if rarely moved, wide range of temp

## Product information


- Article code 2-051-40V
- SKU 41705
- EAN 3838461417054

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

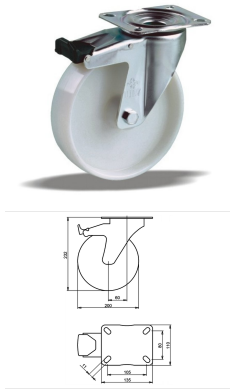

## Product description

stainless steel Swivel castor with brake with an overall height of 232 mm

Wheel diameter x width: 200 x 50 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with roller bearing and solid polyamide wheel with hardness 70±5 Shore D

the double brake system, brakes the turning of the wheel and the swivel rotation.

### Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

### Temperature range:

Continuous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

### Advantages of this Steamy floor in Swivel castor with brake:

- ✓ washing allowed
- ✓ shining
- ✓ hot and wet conditions

## LIV SYSTEMS stainless steel Swivel castor with brake + solid polyamide wheel Ø200 x W50mm for 300kg Prod ID: 41665

ID 41665: Castor overall height 232 mm | 4 mounting holes with distance 105x80 mm | Wheel with roller bearing and solid polyamide wheel with hardness 70±5 Shore D | The double brake system, brakes the turning of the wheel and the swivel rotation. | Steam

## Product information


- Article code 2-725 A
- SKU 41665
- EAN 3838461416651

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

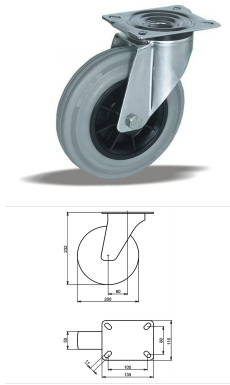

## Product description

stainless steel Swivel castor with an overall height of 232 mm

Wheel diameter x width: 200 x 50 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with roller bearing and grey rubber tyre with hardness 83 ° shore A on polypropylene.

### Approved and tested load capacity

Dynamic 230 kg

Static 280 kg

### Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

### Advantages of this Floor floor turns Swivel castor:

- ✓ preservation
- ✓ and steam proof
- ✓ obstacle smooth pass

## LIV SYSTEMS stainless steel Swivel castor + grey rubber tyre Ø200 x W50mm for 230kg Prod ID: 41883

ID 41883: Castor overall height 232 mm | 4 mounting holes with distance 105x80 mm | Wheel with roller bearing and grey rubber tyre with hardness 83 ° shore A | Floor floor turns, floor preservation, wet and steam proof, low obstacle smooth pass

## Product information


- Article code 2-920 ISO
- SKU 41883
- EAN 3838461418839

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)



## Product description

stainless steel Swivel castor with an overall height of 232 mm

Wheel diameter x width: 200 x 50 mm

Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 93 mm

Wheel with plain bearing and grey rubber tyre with hardness 83 ° shore A on polypropylene.

### Approved and tested load capacity

Dynamic 230 kg

Static 280 kg

### Temperature range:

Continous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

### Advantages of this Floor floor turns Swivel castor:

- ✓ preservation
- ✓ and steam proof
- ✓ obstacle smooth pass

## LIV SYSTEMS stainless steel Swivel castor + grey rubber tyre Ø200 x W50mm for 230kg Prod ID: 41935

ID 41935: Castor overall height 232 mm | 4 mounting holes with distance #\$\$ mm | Wheel with plain bearing and grey rubber tyre with hardness 83 ° shore A | Floor floor turns, floor preservation, wet and steam proof, low obstacle smooth pass

## Product information

- Article code 2-978 L12
- SKU 41935
- EAN 3838461419355

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)





## Product description

stainless steel Wheel with roller bearing and elastic rubber tyre with hardness 70 ° Shore A on polyamide

Wheel diameter x width: 200 x 50 mm

Axle hole: 20 mm

Hub length: 58 mm

### Approved and tested load capacity

Dynamic 400 kg

Static 500 kg

### Temperature range:

Continuous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

### Advantages of this Tile floor ride wheel:

- ✓ absorbing
- ✓ ride over obstacles
- ✓ to keep clean


## LIV SYSTEMS stainless steel wheel + elastic rubber tyre Ø200 x W50mm for 400kg Prod ID: 42313

ID 42313: stainless steel Wheel with roller bearing and elastic rubber tyre with hardness 70 ° Shore A on polyamide |

Axle hole: 20 mm | Hub length: 58 mm | Tile floor ride, shock absorbing, smooth ride over obstacles, easy to keep clean

## Product information

- Article code 2-040-40V
- SKU 42313
- EAN 3838461423130

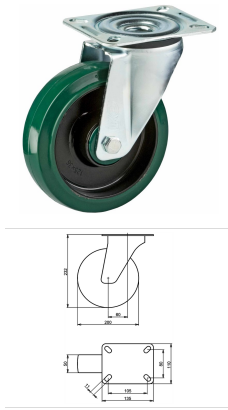

## Product description

stainless steel Swivel castor with an overall height of 232 mm

Wheel diameter x width: 200 x 50 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with plain bearing and elastic rubber tyre with hardness 70 ° Shore A on polyamide.

### Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

### Temperature range:

Continuous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

### Advantages of this Tile floor ride Swivel castor:

- ✓ absorbing
- ✓ ride over obstacles
- ✓ to keep clean

## LIV SYSTEMS stainless steel Swivel castor + elastic rubber tyre Ø200 x W50mm for 300kg Prod ID: 41793

ID 41793: Castor overall height 232 mm | 4 mounting holes with distance 105x80 mm | Wheel with plain bearing and elastic rubber tyre with hardness 70 ° Shore A | Tile floor ride, shock absorbing, smooth ride over obstacles, easy to keep clean

## Product information


- Article code 2-042-40D
- SKU 41793
- EAN 3838461417931

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

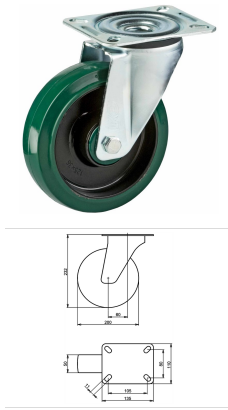

## Product description

stainless steel Swivel castor with an overall height of 232 mm

Wheel diameter x width: 200 x 50 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with ball bearing and elastic rubber tyre with hardness 70 ° Shore A on polyamide.

### Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

### Temperature range:

Continuous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

### Advantages of this Tile floor ride Swivel castor:

- ✓ absorbing
- ✓ ride over obstacles
- ✓ to keep clean

## LIV SYSTEMS stainless steel Swivel castor + elastic rubber tyre Ø200 x W50mm for 300kg Prod ID: 42244

ID 42244: Castor overall height 232 mm | 4 mounting holes with distance 105x80 mm | Wheel with ball bearing and elastic rubber tyre with hardness 70 ° Shore A | Tile floor ride, shock absorbing, smooth ride over obstacles, easy to keep clean

## Product information

- Article code 2-042-40K
- SKU 42244
- EAN 3838461422447

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)



## Product description

stainless steel Swivel castor with brake with an overall height of 232 mm

Wheel diameter x width: 200 x 50 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with plain bearing and elastic rubber tyre with hardness 70 ° Shore A on polyamide

the double brake system, brakes the turning of the wheel and the swivel rotation.

### Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

### Temperature range:

Continuous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

### Advantages of this Tile floor ride Swivel castor with brake:

- ✓ absorbing
- ✓ ride over obstacles
- ✓ to keep clean

## LIV SYSTEMS stainless steel Swivel castor with brake + elastic rubber tyre Ø200 x W50mm for 300kg Prod ID: 41804

ID 41804: Castor overall height 232 mm | 4 mounting holes with distance 105x80 mm | Wheel with plain bearing and elastic rubber tyre with hardness 70 ° Shore A | The double brake system, brakes the turning of the wheel and the swivel rotation. | Tile floor

## Product information


- Article code 2-043-40D
- SKU 41804
- EAN 3838461418044

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)



## Product description

stainless steel Swivel castor with an overall height of 232 mm

Wheel diameter x width: 200 x 50 mm

Top plate with 4 mounting holes of 12,5 mm, mounting hole distance 93 mm and top plate outer dimensions: 93 mm

Wheel with plain bearing and elastic rubber tyre with hardness 70 ° Shore A on polyamide.

### Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

### Temperature range:

Continuous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

### Advantages of this Tile floor ride Swivel castor:

- ✓ absorbing
- ✓ ride over obstacles
- ✓ to keep clean

## LIV SYSTEMS stainless steel Swivel castor + elastic rubber tyre Ø200 x W50mm for 300kg Prod ID: 41815

ID 41815: Castor overall height 232 mm | 4 mounting holes with distance 93 mm | Wheel with plain bearing and elastic rubber tyre with hardness 70 ° Shore A | Tile floor ride, shock absorbing, smooth ride over obstacles, easy to keep clean

## Product information


- Article code 2-044-40D
- SKU 41815
- EAN 3838461418150

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)



## Product description

stainless steel Swivel castor with an overall height of 232 mm

Wheel diameter x width: 200 x 50 mm

Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 93 mm

Wheel with ball bearing and elastic rubber tyre with hardness 70 ° Shore A on polyamide.

### Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

### Temperature range:

Continuous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

### Advantages of this Tile floor ride Swivel castor:

- ✓ absorbing
- ✓ ride over obstacles
- ✓ to keep clean

## LIV SYSTEMS stainless steel Swivel castor + elastic rubber tyre Ø200 x W50mm for 300kg Prod ID: 42273

ID 42273: Castor overall height 232 mm | 4 mounting holes with distance #\$\$ mm | Wheel with ball bearing and elastic rubber tyre with hardness 70 ° Shore A | Tile floor ride, shock absorbing, smooth ride over obstacles, easy to keep clean

## Product information

- Article code 2-044-40K
- SKU 42273
- EAN 3838461422737

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)



## Product description

stainless steel Swivel castor with brake with an overall height of 232 mm

Wheel diameter x width: 200 x 50 mm

Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 93 mm

Wheel with plain bearing and elastic rubber tyre with hardness 70 ° Shore A on polyamide

the double brake system, brakes the turning of the wheel and the swivel rotation.

### Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

### Temperature range:

Continious operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

### Advantages of this Tile floor ride Swivel castor with brake:

- ✓ absorbing
- ✓ ride over obstacles
- ✓ to keep clean

## LIV SYSTEMS stainless steel Swivel castor with brake + elastic rubber tyre Ø200 x W50mm for 300kg Prod ID: 41833

ID 41833: Castor overall height 232 mm | 4 mounting holes with distance #\$\$ mm | Wheel with plain bearing and elastic rubber tyre with hardness 70 ° Shore A | The double brake system, brakes the turning of the wheel and the swivel rotation. | Tile floor r

## Product information

- Article code 2-045-40D
- SKU 41833
- EAN 3838461418334

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)



## Product description

stainless steel Swivel castor with brake with an overall height of 232 mm

Wheel diameter x width: 200 x 50 mm

Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 93 mm

Wheel with ball bearing and elastic rubber tyre with hardness 70 ° Shore A on polyamide

the double brake system, brakes the turning of the wheel and the swivel rotation.

### Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

### Temperature range:

Continious operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

### Advantages of this Tile floor ride Swivel castor with brake:

- ✓ absorbing
- ✓ ride over obstacles
- ✓ to keep clean

## LIV SYSTEMS stainless steel Swivel castor with brake + elastic rubber tyre Ø200 x W50mm for 300kg Prod ID:

### 42284

ID 42284: Castor overall height 232 mm | 4 mounting holes with distance #\$\$ mm | Wheel with ball bearing and elastic rubber tyre with hardness 70 ° Shore A | The double brake system, brakes the turning of the wheel and the swivel rotation. | Tile floor ri

## Product information

- Article code 2-045-40K
- SKU 42284
- EAN 3838461422843

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)





## Product description

stainless steel Fixed castor with an overall height of 232 mm

Wheel diameter x width: 200 x 50 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with plain bearing and elastic rubber tyre with hardness 70 ° Shore A on polyamide.

### Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

### Temperature range:

Continuous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

### Advantages of this Tile floor ride Fixed castor:

- ✓ absorbing
- ✓ ride over obstacles
- ✓ to keep clean

## LIV SYSTEMS stainless steel Fixed castor + elastic rubber tyre Ø200 x W50mm for 300kg Prod ID: 41775

ID 41775: Castor overall height 232 mm | 4 mounting holes with distance 105x80 mm | Wheel with plain bearing and elastic rubber tyre with hardness 70 ° Shore A | Tile floor ride, shock absorbing, smooth ride over obstacles, easy to keep clean

## Product information


- Article code 2-041-40D
- SKU 41775
- EAN 3838461417757

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)



## Product description

stainless steel Fixed castor with an overall height of 232 mm

Wheel diameter x width: 200 x 50 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with ball bearing and elastic rubber tyre with hardness 70 ° Shore A on polyamide.

### Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

### Temperature range:

Continuous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

### Advantages of this Tile floor ride Fixed castor:

- ✓ absorbing
- ✓ ride over obstacles
- ✓ to keep clean

## LIV SYSTEMS stainless steel Fixed castor + elastic rubber tyre Ø200 x W50mm for 300kg Prod ID: 42233

ID 42233: Castor overall height 232 mm | 4 mounting holes with distance 105x80 mm | Wheel with ball bearing and elastic rubber tyre with hardness 70 ° Shore A | Tile floor ride, shock absorbing, smooth ride over obstacles, easy to keep clean

## Product information


- Article code 2-041-40K
- SKU 42233
- EAN 3838461422331

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)



## Product description

stainless steel Wheel with roller bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A on polyamide

Wheel diameter x width: 200 x 50 mm

Axle hole: 12,5 mm

Hub length: 58 mm

### Approved and tested load capacity

Dynamic 500 kg

Static 620 kg

### Temperature range:

Continuous operation: -25 | +55°C

Short (10 min) exposure: -30 | +55°C

### Advantages of this No trail highway drive wheel:

- ✓ deform if stationed
- ✓ range of temperatures
- ✓ resistant

## LIV SYSTEMS stainless steel wheel + injection-moulded polyurethane tread Ø200 x W50mm for 500kg Prod ID: 43114

ID 43114: stainless steel Wheel with roller bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A on polyamide | Axle hole: 12,5 mm | Hub length: 58 mm | No trail highway drive, low deform if stationed, wide range of temperatures, oil

## Product information

- Article code 2-050-40V
- SKU 43114
- EAN 3838461431142



## Product description

stainless steel Wheel with ball bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A on polyamide

Wheel diameter x width: 200 x 50 mm

Axle hole: 20 mm

Hub length: 58 mm

### Approved and tested load capacity

Dynamic 500 kg

Static 620 kg

### Temperature range:

Continuous operation: -25 | +55°C

Short (10 min) exposure: -30 | +55°C

### Advantages of this No trail highway drive wheel:


- ✓ deform if stationed
- ✓ range of temperatures
- ✓ resistant

## LIV SYSTEMS stainless steel wheel + injection-moulded polyurethane tread Ø200 x W50mm for 500kg Prod ID: 42295

ID 42295: stainless steel Wheel with ball bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A on polyamide | Axle hole: 20 mm | Hub length: 58 mm | No trail highway drive, low deform if stationed, wide range of temperatures, oil res

## Product information

- Article code 2-050-40K
- SKU 42295
- EAN 3838461422959

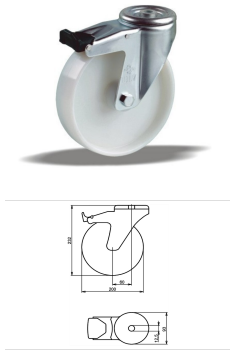

## Product description

stainless steel Swivel castor with brake with an overall height of 232 mm

Wheel diameter x width: 200 x 50 mm

Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 93 mm

Wheel with roller bearing and solid polyamide wheel with hardness 70±5 Shore D

the double brake system, brakes the turning of the wheel and the swivel rotation.

### Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

### Temperature range:

Continuous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

### Advantages of this Steamy floor in Swivel castor with brake:

- ✓ washing allowed
- ✓ shining
- ✓ hot and wet conditions

## LIV SYSTEMS stainless steel Swivel castor with brake + solid polyamide wheel Ø200 x W50mm for 300kg Prod ID: 41694

ID 41694: Castor overall height 232 mm | 4 mounting holes with distance #\$\$ mm | Wheel with roller bearing and solid polyamide wheel with hardness 70±5 Shore D | The double brake system, brakes the turning of the wheel and the swivel rotation. | Steamy f

## Product information


- Article code 2-792 L12
- SKU 41694
- EAN 3838461416941

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

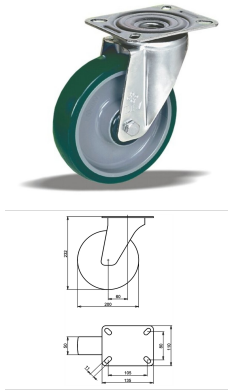

## Product description

stainless steel Swivel castor with an overall height of 232 mm

Wheel diameter x width: 200 x 50 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with plain bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A on polyamide.

### Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

### Temperature range:

Continuous operation: -25 | +55°C

Short (10 min) exposure: -30 | +55°C

### Advantages of this No trail highway drive Swivel castor:

- ✓ deformation if rarely moved
- ✓ range of temperatures
- ✓ resistant

## LIV SYSTEMS stainless steel Swivel castor + injection-moulded polyurethane tread Ø200 x W50mm for 300kg Prod ID: 41724

ID 41724: Castor overall height 232 mm | 4 mounting holes with distance 105x80 mm | Wheel with plain bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A | No trail highway drive, low deformation if rarely moved, wide range of tempe

## Product information


- Article code 2-052-40D
- SKU 41724
- EAN 3838461417245

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

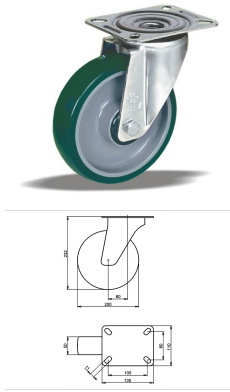

## Product description

stainless steel Swivel castor with an overall height of 232 mm

Wheel diameter x width: 200 x 50 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with roller bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A on polyamide.

### Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

### Temperature range:

Continuous operation: -25 | +55°C

Short (10 min) exposure: -30 | +55°C

### Advantages of this No trail highway drive Swivel castor:

- ✓ deformation if rarely moved
- ✓ range of temperatures
- ✓ resistant

## LIV SYSTEMS stainless steel Swivel castor + injection-moulded polyurethane tread Ø200 x W50mm for 300kg Prod ID: 41723

ID 41723: Castor overall height 232 mm | 4 mounting holes with distance 105x80 mm | Wheel with roller bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A | No trail highway drive, low deformation if rarely moved, wide range of temp

## Product information


- Article code 2-052-40V
- SKU 41723
- EAN 3838461417238

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

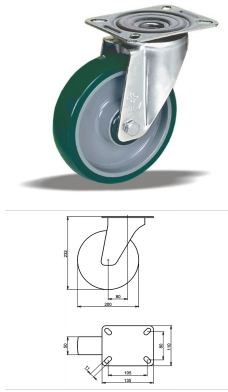

## Product description

stainless steel Swivel castor with an overall height of 232 mm

Wheel diameter x width: 200 x 50 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with ball bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A on polyamide.

### Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

### Temperature range:

Continuous operation: -25 | +55°C

Short (10 min) exposure: -30 | +55°C

### Advantages of this No trail highway drive Swivel castor:

- ✓ deformation if rarely moved
- ✓ range of temperatures
- ✓ resistant

## LIV SYSTEMS stainless steel Swivel castor + injection-moulded polyurethane tread Ø200 x W50mm for 300kg Prod ID: 42175

ID 42175: Castor overall height 232 mm | 4 mounting holes with distance 105x80 mm | Wheel with ball bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A | No trail highway drive, low deformation if rarely moved, wide range of temper

## Product information

- Article code 2-052-40K
- SKU 42175
- EAN 3838461421754


## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)



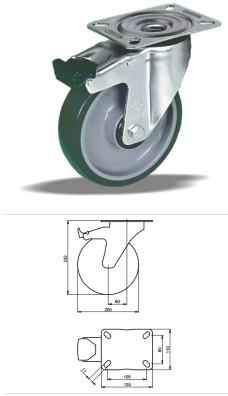

## Product description

stainless steel Swivel castor with brake with an overall height of 232 mm

Wheel diameter x width: 200 x 50 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with plain bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A on polyamide

the double brake system, brakes the turning of the wheel and the swivel rotation.

### Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

### Temperature range:

Continuous operation: -25 | +55°C

Short (10 min) exposure: -30 | +55°C

### Advantages of this No trail highway drive Swivel castor with brake:

- ✓ deformation if rarely moved
- ✓ range of temperatures
- ✓ resistant

## LIV SYSTEMS stainless steel Swivel castor with brake + injection-moulded polyurethane tread Ø200 x W50mm for 300kg Prod ID: 41735

ID 41735: Castor overall height 232 mm | 4 mounting holes with distance 105x80 mm | Wheel with plain bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A | The double brake system, brakes the turning of the wheel and the swivel rota

## Product information


- Article code 2-053-40D
- SKU 41735
- EAN 3838461417351

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

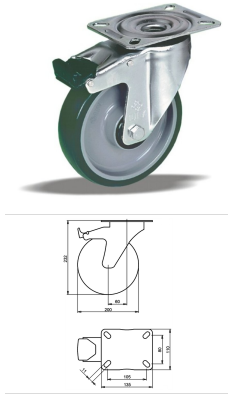

## Product description

stainless steel Swivel castor with brake with an overall height of 232 mm

Wheel diameter x width: 200 x 50 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with roller bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A on polyamide

the double brake system, brakes the turning of the wheel and the swivel rotation.

### Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

### Temperature range:

Continuous operation: -25 | +55°C

Short (10 min) exposure: -30 | +55°C

### Advantages of this No trail highway drive Swivel castor with brake:

- ✓ deformation if rarely moved
- ✓ range of temperatures
- ✓ resistant

## LIV SYSTEMS stainless steel Swivel castor with brake + injection-moulded polyurethane tread Ø200 x W50mm for 300kg Prod ID: 41734

ID 41734: Castor overall height 232 mm | 4 mounting holes with distance 105x80 mm | Wheel with roller bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A | The double brake system, brakes the turning of the wheel and the swivel rot

## Product information


- Article code 2-053-40V
- SKU 41734
- EAN 3838461417344

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

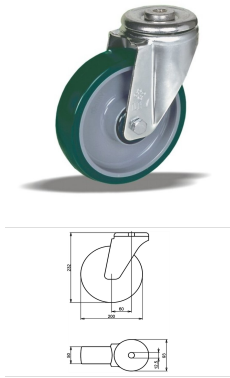

## Product description

stainless steel Swivel castor with an overall height of 232 mm

Wheel diameter x width: 200 x 50 mm

Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 93 mm

Wheel with plain bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A on polyamide.

### Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

### Temperature range:

Continuous operation: -25 | +55°C

Short (10 min) exposure: -30 | +55°C

### Advantages of this No trail highway drive Swivel castor:

- ✓ deformation if rarely moved
- ✓ range of temperatures
- ✓ resistant

## LIV SYSTEMS stainless steel Swivel castor + injection-moulded polyurethane tread Ø200 x W50mm for 300kg Prod ID: 41753

ID 41753: Castor overall height 232 mm | 4 mounting holes with distance #\$\$ mm | Wheel with plain bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A | No trail highway drive, low deformation if rarely moved, wide range of temperat

## Product information


- Article code 2-054-40D
- SKU 41753
- EAN 3838461417535

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

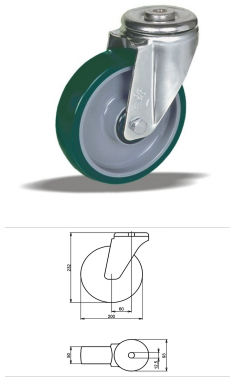

## Product description

stainless steel Swivel castor with an overall height of 232 mm

Wheel diameter x width: 200 x 50 mm

Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 93 mm

Wheel with roller bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A on polyamide.

### Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

### Temperature range:

Continous operation: -25 | +55°C

Short (10 min) exposure: -30 | +55°C

### Advantages of this No trail highway drive Swivel castor:

- ✓ deformation if rarely moved
- ✓ range of temperatures
- ✓ resistant

## LIV SYSTEMS stainless steel Swivel castor + injection-moulded polyurethane tread Ø200 x W50mm for 300kg Prod ID: 41745

ID 41745: Castor overall height 232 mm | 4 mounting holes with distance #\$\$ mm | Wheel with roller bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A | No trail highway drive, low deformation if rarely moved, wide range of tempera

## Product information


- Article code 2-054-40V
- SKU 41745
- EAN 3838461417450

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

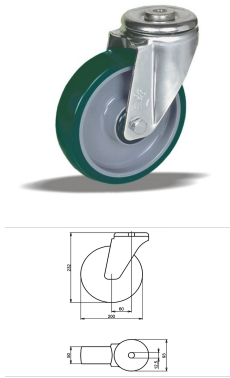

## Product description

stainless steel Swivel castor with an overall height of 232 mm

Wheel diameter x width: 200 x 50 mm

Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 93 mm

Wheel with ball bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A on polyamide.

### Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

### Temperature range:

Continious operation: -25 | +55°C

Short (10 min) exposure: -30 | +55°C

### Advantages of this No trail highway drive Swivel castor:

- ✓ deformation if rarely moved
- ✓ range of temperatures
- ✓ resistant

## LIV SYSTEMS stainless steel Swivel castor + injection-moulded polyurethane tread Ø200 x W50mm for 300kg Prod ID: 42204

ID 42204: Castor overall height 232 mm | 4 mounting holes with distance #\$\$ mm | Wheel with ball bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A | No trail highway drive, low deformation if rarely moved, wide range of temperatu

## Product information


- Article code 2-054-40K
- SKU 42204
- EAN 3838461422041

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

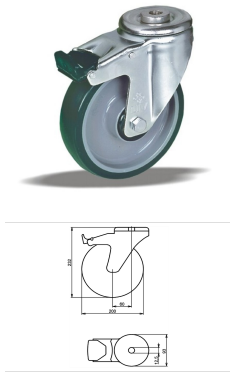

## Product description

stainless steel Swivel castor with brake with an overall height of 232 mm

Wheel diameter x width: 200 x 50 mm

Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 93 mm

Wheel with plain bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A on polyamide

the double brake system, brakes the turning of the wheel and the swivel rotation.

### Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

### Temperature range:

Continious operation: -25 | +55°C

Short (10 min) exposure: -30 | +55°C

### Advantages of this No trail highway drive Swivel castor with brake:

- ✓ deformation if rarely moved
- ✓ range of temperatures
- ✓ resistant

## LIV SYSTEMS stainless steel Swivel castor with brake + injection-moulded polyurethane tread Ø200 x W50mm for 300kg Prod ID: 41764

ID 41764: Castor overall height 232 mm | 4 mounting holes with distance #\$\$ mm | Wheel with plain bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A | The double brake system, brakes the turning of the wheel and the swivel rotatio

## Product information


- Article code 2-055-40D
- SKU 41764
- EAN 3838461417641

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

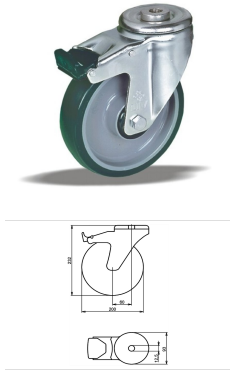

## Product description

stainless steel Swivel castor with brake with an overall height of 232 mm

Wheel diameter x width: 200 x 50 mm

Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 93 mm

Wheel with roller bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A on polyamide

the double brake system, brakes the turning of the wheel and the swivel rotation.

### Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

### Temperature range:

Continious operation: -25 | +55°C

Short (10 min) exposure: -30 | +55°C

### Advantages of this No trail highway drive Swivel castor with brake:

- ✓ deformation if rarely moved
- ✓ range of temperatures
- ✓ resistant

## LIV SYSTEMS stainless steel Swivel castor with brake + injection-moulded polyurethane tread Ø200 x W50mm for 300kg Prod ID: 41763

ID 41763: Castor overall height 232 mm | 4 mounting holes with distance #\$\$ mm | Wheel with roller bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A | The double brake system, brakes the turning of the wheel and the swivel rotati

## Product information


- Article code 2-055-40V
- SKU 41763
- EAN 3838461417634

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

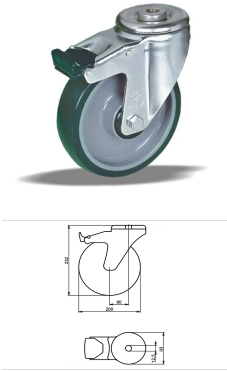

## Product description

stainless steel Swivel castor with brake with an overall height of 232 mm

Wheel diameter x width: 200 x 50 mm

Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 93 mm

Wheel with ball bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A on polyamide

the double brake system, brakes the turning of the wheel and the swivel rotation.

### Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

### Temperature range:

Continious operation: -25 | +55°C

Short (10 min) exposure: -30 | +55°C

### Advantages of this No trail highway drive Swivel castor with brake:

- ✓ deformation if rarely moved
- ✓ range of temperatures
- ✓ resistant

## LIV SYSTEMS stainless steel Swivel castor with brake + injection-moulded polyurethane tread Ø200 x W50mm for 300kg Prod ID: 42215

ID 42215: Castor overall height 232 mm | 4 mounting holes with distance #\$\$ mm | Wheel with ball bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A | The double brake system, brakes the turning of the wheel and the swivel rotation

## Product information

- Article code 2-055-40K
- SKU 42215
- EAN 3838461422157


## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)



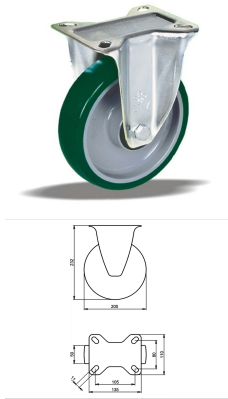

## Product description

stainless steel Fixed castor with an overall height of 232 mm

Wheel diameter x width: 200 x 50 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with plain bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A on polyamide.

### Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

### Temperature range:

Continuous operation: -25 | +55°C

Short (10 min) exposure: -30 | +55°C

### Advantages of this No trail highway drive Fixed castor:

- ✓ deformation if rarely moved
- ✓ range of temperatures
- ✓ resistant

## LIV SYSTEMS stainless steel Fixed castor + injection-moulded polyurethane tread Ø200 x W50mm for 300kg Prod

### ID: 41713

ID 41713: Castor overall height 232 mm | 4 mounting holes with distance 105x80 mm | Wheel with plain bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A | No trail highway drive, low deformation if rarely moved, wide range of tempe

## Product information


- Article code 2-051-40D
- SKU 41713
- EAN 3838461417139

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

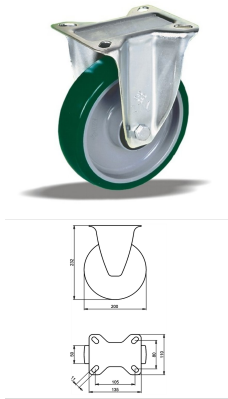

## Product description

stainless steel Fixed castor with an overall height of 232 mm

Wheel diameter x width: 200 x 50 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with ball bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A on polyamide.

### Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

### Temperature range:

Continuous operation: -25 | +55°C

Short (10 min) exposure: -30 | +55°C

### Advantages of this No trail highway drive Fixed castor:

- ✓ deformation if rarely moved
- ✓ range of temperatures
- ✓ resistant

## LIV SYSTEMS stainless steel Fixed castor + injection-moulded polyurethane tread Ø200 x W50mm for 300kg Prod

### ID: 42164

ID 42164: Castor overall height 232 mm | 4 mounting holes with distance 105x80 mm | Wheel with ball bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A | No trail highway drive, low deformation if rarely moved, wide range of temper

## Product information


- Article code 2-051-40K
- SKU 42164
- EAN 3838461421648

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

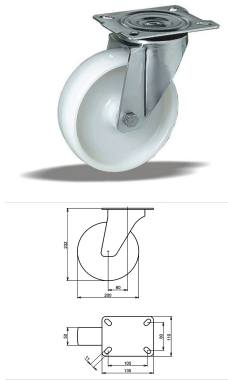

## Product description

stainless steel Swivel castor with an overall height of 232 mm

Wheel diameter x width: 200 x 50 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with plain bearing and solid polyamide wheel with hardness 70±5 Shore D.

### Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

### Temperature range:

Continuous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

### Advantages of this Steamy floor in Swivel castor:

✓ washing allowed

✓ shining

✓ hot and wet conditions

## LIV SYSTEMS stainless steel Swivel castor + solid polyamide wheel Ø200 x W50mm for 300kg Prod ID: 41655

ID 41655: Castor overall height 232 mm | 4 mounting holes with distance 105x80 mm | Wheel with plain bearing and solid polyamide wheel with hardness 70±5 Shore D | Steamy floor in, frequent washing allowed, always shining, for hot and wet conditions

## Product information


- Article code 2-674 ISO
- SKU 41655
- EAN 3838461416552

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

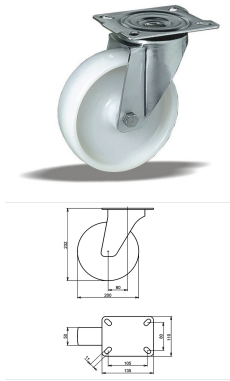

## Product description

stainless steel Swivel castor with an overall height of 232 mm

Wheel diameter x width: 200 x 50 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with roller bearing and solid polyamide wheel with hardness 70±5 Shore D.

### Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

### Temperature range:

Continuous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

### Advantages of this Steamy floor in Swivel castor:

✓ washing allowed

✓ shining

✓ hot and wet conditions

## LIV SYSTEMS stainless steel Swivel castor + solid polyamide wheel Ø200 x W50mm for 300kg Prod ID: 41654

ID 41654: Castor overall height 232 mm | 4 mounting holes with distance 105x80 mm | Wheel with roller bearing and solid polyamide wheel with hardness 70±5 Shore D | Steamy floor in, frequent washing allowed, always shining, for hot and wet conditions

## Product information


- Article code 2-664 ISO
- SKU 41654
- EAN 3838461416545

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

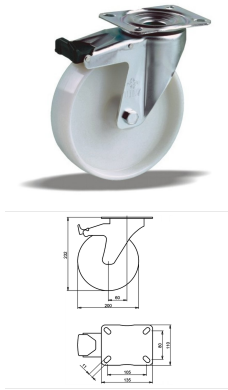

## Product description

stainless steel Swivel castor with brake with an overall height of 232 mm

Wheel diameter x width: 200 x 50 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with plain bearing and solid polyamide wheel with hardness 70±5 Shore D

the double brake system, brakes the turning of the wheel and the swivel rotation.

### Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

### Temperature range:

Continuous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

### Advantages of this Steamy floor in Swivel castor with brake:

- ✓ washing allowed
- ✓ shining
- ✓ hot and wet conditions

## LIV SYSTEMS stainless steel Swivel castor with brake + solid polyamide wheel Ø200 x W50mm for 300kg Prod ID: 41673

ID 41673: Castor overall height 232 mm | 4 mounting holes with distance 105x80 mm | Wheel with plain bearing and solid polyamide wheel with hardness 70±5 Shore D | The double brake system, brakes the turning of the wheel and the swivel rotation. | Steamy

## Product information


- Article code 2-687 A
- SKU 41673
- EAN 3838461416736

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

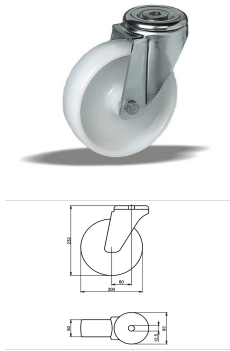

## Product description

stainless steel Swivel castor with an overall height of 232 mm

Wheel diameter x width: 200 x 50 mm

Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 93 mm

Wheel with plain bearing and solid polyamide wheel with hardness 70±5 Shore D.

### Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

### Temperature range:

Continuous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

### Advantages of this Steamy floor in Swivel castor:

- ✓ washing allowed
- ✓ shining
- ✓ hot and wet conditions

## LIV SYSTEMS stainless steel Swivel castor + solid polyamide wheel Ø200 x W50mm for 300kg Prod ID: 41684

ID 41684: Castor overall height 232 mm | 4 mounting holes with distance #\$\$ mm | Wheel with plain bearing and solid polyamide wheel with hardness 70±5 Shore D | Steamy floor in, frequent washing allowed, always shining, for hot and wet conditions

## Product information


- Article code 2-769 L12
- SKU 41684
- EAN 3838461416842

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

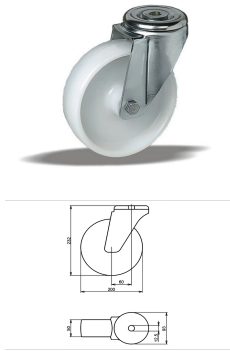

## Product description

stainless steel Swivel castor with an overall height of 232 mm

Wheel diameter x width: 200 x 50 mm

Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 93 mm

Wheel with roller bearing and solid polyamide wheel with hardness 70±5 Shore D.

### Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

### Temperature range:

Continious operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

### Advantages of this Steamy floor in Swivel castor:

✓ washing allowed

✓ shining

✓ hot and wet conditions

## LIV SYSTEMS stainless steel Swivel castor + solid polyamide wheel Ø200 x W50mm for 300kg Prod ID: 41683

ID 41683: Castor overall height 232 mm | 4 mounting holes with distance #\$\$ mm | Wheel with roller bearing and solid polyamide wheel with hardness 70±5 Shore D | Steamy floor in, frequent washing allowed, always shining, for hot and wet conditions

## Product information


- Article code 2-759 L12
- SKU 41683
- EAN 3838461416835

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

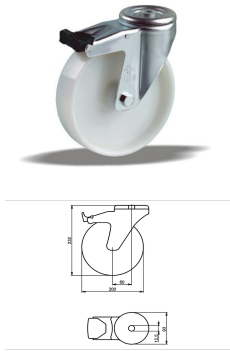

## Product description

stainless steel Swivel castor with brake with an overall height of 232 mm  
 Wheel diameter x width: 200 x 50 mm  
 Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 93 mm  
 Wheel with plain bearing and solid polyamide wheel with hardness 70±5 Shore D  
 the double brake system, brakes the turning of the wheel and the swivel rotation.

### Approved and tested load capacity

Dynamic 300 kg  
 Static 370 kg

### Temperature range:

Continious operation: -25 | +80°C  
 Short (10 min) exposure: -30 | +110°C

### Advantages of this Steamy floor in Swivel castor with brake:

- ✓ washing allowed
- ✓ shining
- ✓ hot and wet conditions

## LIV SYSTEMS stainless steel Swivel castor with brake + solid polyamide wheel Ø200 x W50mm for 300kg Prod ID: 41695

ID 41695: Castor overall height 232 mm | 4 mounting holes with distance #\$\$ mm | Wheel with plain bearing and solid polyamide wheel with hardness 70±5 Shore D | The double brake system, brakes the turning of the wheel and the swivel rotation. | Steamy fl

## Product information

- Article code 2-799 L12
- SKU 41695
- EAN 3838461416958


## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)



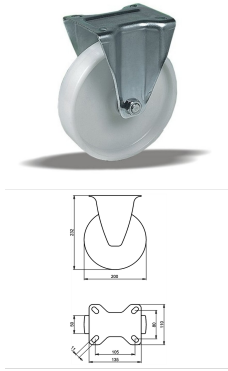

## Product description

stainless steel Fixed castor with an overall height of 232 mm

Wheel diameter x width: 200 x 50 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with plain bearing and solid polyamide wheel with hardness 70±5 Shore D.

### Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

### Temperature range:

Continuous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

### Advantages of this Steamy floor in Fixed castor:

- ✓ washing allowed
- ✓ shining
- ✓ hot and wet conditions

## LIV SYSTEMS stainless steel Fixed castor + solid polyamide wheel Ø200 x W50mm for 300kg Prod ID: 41644

ID 41644: Castor overall height 232 mm | 4 mounting holes with distance 105x80 mm | Wheel with plain bearing and solid polyamide wheel with hardness 70±5 Shore D | Steamy floor in, frequent washing allowed, always shining, for hot and wet conditions

## Product information


- Article code 2-679 ISO
- SKU 41644
- EAN 3838461416446

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

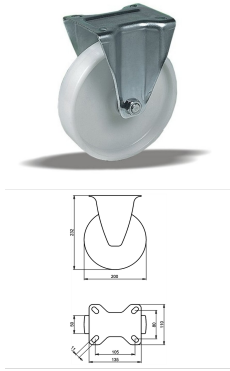

## Product description

stainless steel Fixed castor with an overall height of 232 mm

Wheel diameter x width: 200 x 50 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with roller bearing and solid polyamide wheel with hardness 70±5 Shore D.

### Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

### Temperature range:

Continuous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

### Advantages of this Steamy floor in Fixed castor:

✓ washing allowed

✓ shining

✓ hot and wet conditions

## LIV SYSTEMS stainless steel Fixed castor + solid polyamide wheel Ø200 x W50mm for 300kg Prod ID: 41643

ID 41643: Castor overall height 232 mm | 4 mounting holes with distance 105x80 mm | Wheel with roller bearing and solid polyamide wheel with hardness 70±5 Shore D | Steamy floor in, frequent washing allowed, always shining, for hot and wet conditions

## Product information


- Article code 2-669 ISO
- SKU 41643
- EAN 3838461416439

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

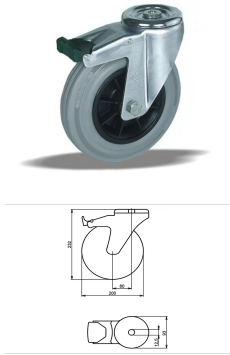

## Product description

stainless steel Swivel castor with brake with an overall height of 232 mm  
 Wheel diameter x width: 200 x 50 mm  
 Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 93 mm  
 Wheel with roller bearing and grey rubber tyre with hardness 83 ° shore A on polypropylene  
 the double brake system, brakes the turning of the wheel and the swivel rotation.

### Approved and tested load capacity

Dynamic 230 kg  
 Static 280 kg

### Temperature range:

Continuous operation: #\$\$°C  
 Short (10 min) exposure: #\$\$°C

### Advantages of this Floor floor turns Swivel castor with brake:

- ✓ preservation
- ✓ and steam proof
- ✓ obstacle smooth pass

## LIV SYSTEMS stainless steel Swivel castor with brake + grey rubber tyre Ø200 x W50mm for 230kg Prod ID: 41963

ID 41963: Castor overall height 232 mm | 4 mounting holes with distance #\$\$ mm | Wheel with roller bearing and grey rubber tyre with hardness 83 ° shore A | The double brake system, brakes the turning of the wheel and the swivel rotation. | Floor floor t


## Product information

- Article code 2-985 L12
- SKU 41963
- EAN 3838461419638

## Specifications

The result of our quality is maximum performance!

[Close](#)  
[Close](#)

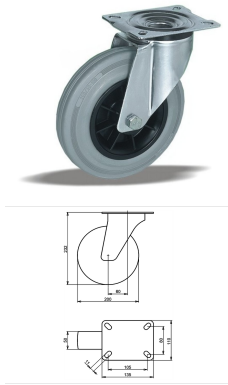

## Product description

stainless steel Swivel castor with an overall height of 232 mm

Wheel diameter x width: 200 x 50 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with plain bearing and grey rubber tyre with hardness 83 ° shore A on polypropylene.

### Approved and tested load capacity

Dynamic 230 kg

Static 280 kg

### Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

### Advantages of this Floor floor turns Swivel castor:

- ✓ preservation
- ✓ and steam proof
- ✓ obstacle smooth pass

## LIV SYSTEMS stainless steel Swivel castor + grey rubber tyre Ø200 x W50mm for 230kg Prod ID: 41884

ID 41884: Castor overall height 232 mm | 4 mounting holes with distance 105x80 mm | Wheel with plain bearing and grey rubber tyre with hardness 83 ° shore A | Floor floor turns, floor preservation, wet and steam proof, low obstacle smooth pass

## Product information


- Article code 2-927 ISO
- SKU 41884
- EAN 3838461418846

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

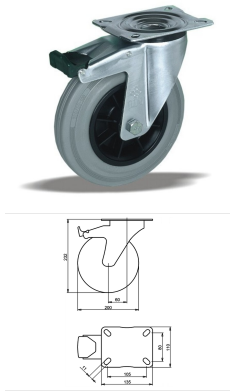

## Product description

stainless steel Swivel castor with brake with an overall height of 232 mm

Wheel diameter x width: 200 x 50 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with plain bearing and grey rubber tyre with hardness 83 ° shore A on polypropylene

the double brake system, brakes the turning of the wheel and the swivel rotation.

### Approved and tested load capacity

Dynamic 230 kg

Static 280 kg

### Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

### Advantages of this Floor floor turns Swivel castor with brake:

- ✓ preservation
- ✓ and steam proof
- ✓ obstacle smooth pass

## LIV SYSTEMS stainless steel Swivel castor with brake + grey rubber tyre Ø200 x W50mm for 230kg Prod ID: 41913

ID 41913: Castor overall height 232 mm | 4 mounting holes with distance 105x80 mm | Wheel with plain bearing and grey rubber tyre with hardness 83 ° shore A | The double brake system, brakes the turning of the wheel and the swivel rotation. | Floor floor

## Product information


- Article code 2-941 ISO
- SKU 41913
- EAN 3838461419133

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

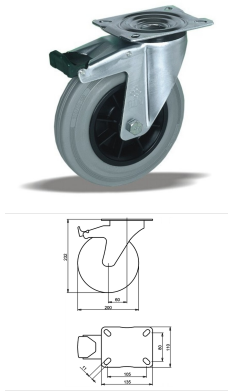

## Product description

stainless steel Swivel castor with brake with an overall height of 232 mm

Wheel diameter x width: 200 x 50 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with roller bearing and grey rubber tyre with hardness 83 ° shore A on polypropylene

the double brake system, brakes the turning of the wheel and the swivel rotation.

### Approved and tested load capacity

Dynamic 230 kg

Static 280 kg

### Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

### Advantages of this Floor floor turns Swivel castor with brake:

- ✓ preservation
- ✓ and steam proof
- ✓ obstacle smooth pass

## LIV SYSTEMS stainless steel Swivel castor with brake + grey rubber tyre Ø200 x W50mm for 230kg Prod ID: 41905

ID 41905: Castor overall height 232 mm | 4 mounting holes with distance 105x80 mm | Wheel with roller bearing and grey rubber tyre with hardness 83 ° shore A | The double brake system, brakes the turning of the wheel and the swivel rotation. | Floor floo

## Product information


- Article code 2-934 ISO
- SKU 41905
- EAN 3838461419058

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)



## Product description

stainless steel Swivel castor with an overall height of 232 mm

Wheel diameter x width: 200 x 50 mm

Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 93 mm

Wheel with roller bearing and grey rubber tyre with hardness 83 ° shore A on polypropylene.

### Approved and tested load capacity

Dynamic 230 kg

Static 280 kg

### Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

### Advantages of this Floor floor turns Swivel castor:

- ✓ preservation
- ✓ and steam proof
- ✓ obstacle smooth pass

## LIV SYSTEMS stainless steel Swivel castor + grey rubber tyre Ø200 x W50mm for 230kg Prod ID: 41934

ID 41934: Castor overall height 232 mm | 4 mounting holes with distance #\$\$ mm | Wheel with roller bearing and grey rubber tyre with hardness 83 ° shore A | Floor floor turns, floor preservation, wet and steam proof, low obstacle smooth pass

## Product information


- Article code 2-971 L12
- SKU 41934
- EAN 3838461419348

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

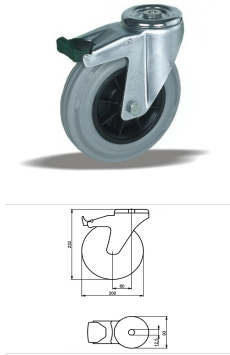

## Product description

stainless steel Swivel castor with brake with an overall height of 232 mm  
 Wheel diameter x width: 200 x 50 mm  
 Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 93 mm  
 Wheel with plain bearing and grey rubber tyre with hardness 83 ° shore A on polypropylene  
 the double brake system, brakes the turning of the wheel and the swivel rotation.

### Approved and tested load capacity

Dynamic 230 kg  
 Static 280 kg

### Temperature range:

Continious operation: -20 | +70°C  
 Short (10 min) exposure: -30 | +80°C

### Advantages of this Floor floor turns Swivel castor with brake:

- ✓ preservation
- ✓ and steam proof
- ✓ obstacle smooth pass

## LIV SYSTEMS stainless steel Swivel castor with brake + grey rubber tyre Ø200 x W50mm for 230kg Prod ID: 41964

ID 41964: Castor overall height 232 mm | 4 mounting holes with distance #\$\$ mm | Wheel with plain bearing and grey rubber tyre with hardness 83 ° shore A | The double brake system, brakes the turning of the wheel and the swivel rotation. | Floor floor tu

## Product information

- Article code 2-992 L12
- SKU 41964
- EAN 3838461419645


## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)



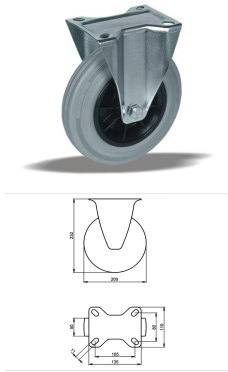

## Product description

stainless steel Fixed castor with an overall height of 232 mm

Wheel diameter x width: 200 x 50 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with plain bearing and grey rubber tyre with hardness 83 ° shore A on polypropylene.

### Approved and tested load capacity

Dynamic 230 kg

Static 280 kg

### Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

### Advantages of this Floor floor turns Fixed castor:

- ✓ preservation
- ✓ and steam proof
- ✓ obstacle smooth pass

## LIV SYSTEMS stainless steel Fixed castor + grey rubber tyre Ø200 x W50mm for 230kg Prod ID: 41855

ID 41855: Castor overall height 232 mm | 4 mounting holes with distance 105x80 mm | Wheel with plain bearing and grey rubber tyre with hardness 83 ° shore A | Floor floor turns, floor preservation, wet and steam proof, low obstacle smooth pass

## Product information


- Article code 2-964 ISO
- SKU 41855
- EAN 3838461418556

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

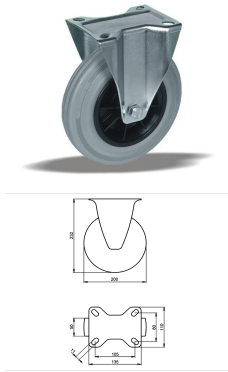

## Product description

stainless steel Fixed castor with an overall height of 232 mm

Wheel diameter x width: 200 x 50 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with roller bearing and grey rubber tyre with hardness 83 ° shore A on polypropylene.

### Approved and tested load capacity

Dynamic 230 kg

Static 280 kg

### Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

### Advantages of this Floor floor turns Fixed castor:

- ✓ preservation
- ✓ and steam proof
- ✓ obstacle smooth pass

## LIV SYSTEMS stainless steel Fixed castor + grey rubber tyre Ø200 x W50mm for 230kg Prod ID: 41854

ID 41854: Castor overall height 232 mm | 4 mounting holes with distance 105x80 mm | Wheel with roller bearing and grey rubber tyre with hardness 83 ° shore A | Floor floor turns, floor preservation, wet and steam proof, low obstacle smooth pass

## Product information


- Article code 2-957 ISO
- SKU 41854
- EAN 3838461418549

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

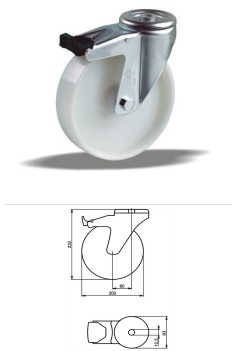

## Product description

stainless steel Swivel castor with brake with an overall height of 232 mm

Wheel diameter x width: 200 x 50 mm

Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #5% mm and top plate outer dimensions: 93 mm

Wheel with roller bearing and solid polyamide wheel with hardness 70±5 Shore D

the double brake system, brakes the turning of the wheel and the swivel rotation.

### Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

### Temperature range:

Continuous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

### Advantages of this Steamy floor in Swivel castor with brake:

- ✓ washing allowed
- ✓ shining
- ✓ hot and wet conditions

## LIV SYSTEMS stainless steel Swivel castor with brake + solid polyamide wheel Ø200 x W50mm for 300kg Prod ID: 41694

ID 41694: Castor overall height 232 mm | 4 mounting holes with distance #5% mm | Wheel with roller bearing and solid polyamide wheel with hardness 70±5 Shore D | The double brake system, brakes the turning of the wheel and the swivel rotation. | Steamy f

## Product information

- Article code 2-792 L12
- SKU 41694
- EAN 3838461416941

**Алматы** (7273)495-231  
**Ангарск** (3955)60-70-56  
**Архангельск** (8182)63-90-72  
**Астрахань** (8512)99-46-04  
**Барнаул** (3852)73-04-60  
**Белгород** (4722)40-23-64  
**Благовещенск** (4162)22-76-07  
**Брянск** (4832)59-03-52  
**Владивосток** (423)249-28-31  
**Владикавказ** (8672)28-90-48  
**Владимир** (4922)49-43-18  
**Волгоград** (844)278-03-48  
**Вологда** (8172)26-41-59  
**Воронеж** (473)204-51-73  
**Екатеринбург** (343)384-55-89

**Иваново** (4932)77-34-06  
**Ижевск** (3412)26-03-58  
**Иркутск** (395)279-98-46  
**Казань** (843)206-01-48  
**Калининград** (4012)72-03-81  
**Калуга** (4842)92-23-67  
**Кемерово** (3842)65-04-62  
**Киров** (8332)68-02-04  
**Коломна** (4966)23-41-49  
**Кострома** (4942)77-07-48  
**Краснодар** (861)203-40-90  
**Красноярск** (391)204-63-61  
**Курск** (4712)77-13-04  
**Курган** (3522)50-90-47  
**Липецк** (4742)52-20-81

**Магнитогорск** (3519)55-03-13  
**Москва** (495)268-04-70  
**Мурманск** (8152)59-64-93  
**Набережные Челны** (8552)20-53-41  
**Нижний Новгород** (831)429-08-12  
**Новокузнецк** (3843)20-46-81  
**Ноябрьск** (3496)41-32-12  
**Новосибирск** (383)227-86-73  
**Омск** (3812)21-46-40  
**Орел** (4862)44-53-42  
**Оренбург** (3532)37-68-04  
**Пенза** (8412)22-31-16  
**Петрозаводск** (8142)55-98-37  
**Псков** (8112)59-10-37  
**Пермь** (342)205-81-47

**Ростов-на-Дону** (863)308-18-15  
**Рязань** (4912)46-61-64  
**Самара** (846)206-03-16  
**Санкт-Петербург** (812)309-46-40  
**Саратов** (845)249-38-78  
**Севастополь** (8692)22-31-93  
**Саранск** (8342)22-96-24  
**Симферополь** (3652)67-13-56  
**Смоленск** (4812)29-41-54  
**Сочи** (862)225-72-31  
**Ставрополь** (8652)20-65-13  
**Сургут** (3462)77-98-35  
**Сыктывкар** (8212)25-95-17  
**Тамбов** (4752)50-40-97  
**Тверь** (4822)63-31-35

**Тольятти** (8482)63-91-07  
**Томск** (3822)98-41-53  
**Тула** (4872)33-79-87  
**Тюмень** (3452)66-21-18  
**Ульяновск** (8422)24-23-59  
**Улан-Удэ** (3012)59-97-51  
**Уфа** (347)229-48-12  
**Хабаровск** (4212)92-98-04  
**Чебоксары** (8352)28-53-07  
**Челябинск** (351)202-03-61  
**Череповец** (8202)49-02-64  
**Чита** (3022)38-34-83  
**Якутск** (4112)23-90-97  
**Ярославль** (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(7172)727-132

Киргизия +996(312)96-26-47

<https://liv.nt-rt.ru/> || [vis@nt-rt.ru](mailto:vis@nt-rt.ru)