

## Product description

stainless steel Swivel castor with brake with an overall height of 210 mm

Wheel diameter x width: 180 x 50 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with plain bearing and grey rubber tyre with hardness 83 ° shore A on polypropylene

the double brake system, brakes the turning of the wheel and the swivel rotation.

### Approved and tested load capacity

Dynamic 200 kg

Static 250 kg

### Temperature range:

Continous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

### Advantages of this Floor floor turns Swivel castor with brake:

- ✓ preservation
- ✓ and steam proof
- ✓ obstacle smooth pass

## LIV SYSTEMS stainless steel Swivel castor with brake + grey rubber tyre Ø180 x W50mm for 200kg Prod ID: 41904

ID 41904: Castor overall height 210 mm | 4 mounting holes with distance 105x80 mm | Wheel with plain bearing and grey rubber tyre with hardness 83 ° shore A | The double brake system, brakes the turning of the wheel and the swivel rotation. | Floor floor

## Product information

- Article code 2-940 ISO
- SKU 41904
- EAN 3838461419041

**Алматы** (7273)495-231  
**Ангарск** (3955)60-70-56  
**Архангельск** (8182)63-90-72  
**Астрахань** (8512)99-46-04  
**Барнаул** (3852)73-04-60  
**Белгород** (4722)40-23-64  
**Благовещенск** (4162)22-76-07  
**Брянск** (4832)59-03-52  
**Владивосток** (423)249-28-31  
**Владикавказ** (8672)28-90-48  
**Владимир** (4922)49-43-18  
**Волгоград** (844)278-03-48  
**Вологда** (8172)26-41-59  
**Воронеж** (473)204-51-73  
**Екатеринбург** (343)384-55-89

**Иваново** (4932)77-34-06  
**Ижевск** (3412)26-03-58  
**Иркутск** (395)279-98-46  
**Казань** (843)206-01-48  
**Калининград** (4012)72-03-81  
**Калуга** (4842)92-23-67  
**Кемерово** (3842)65-04-62  
**Киров** (8332)68-02-04  
**Коломна** (4966)23-41-49  
**Кострома** (4942)77-07-48  
**Краснодар** (861)203-40-90  
**Красноярск** (391)204-63-61  
**Курск** (4712)77-13-04  
**Курган** (3522)50-90-47  
**Липецк** (4742)52-20-81

**Магнитогорск** (3519)55-03-13  
**Москва** (495)268-04-70  
**Мурманск** (8152)59-64-93  
**Набережные Челны** (8552)20-53-41  
**Нижний Новгород** (831)429-08-12  
**Новокузнецк** (3843)20-46-81  
**Ноябрьск** (3496)41-32-12  
**Новосибирск** (383)227-86-73  
**Омск** (3812)21-46-40  
**Орел** (4862)44-53-42  
**Оренбург** (3532)37-68-04  
**Пенза** (8412)22-31-16  
**Петрозаводск** (8142)55-98-37  
**Псков** (8112)59-10-37  
**Пермь** (342)205-81-47

**Ростов-на-Дону** (863)308-18-15  
**Рязань** (4912)46-61-64  
**Самара** (846)206-03-16  
**Санкт-Петербург** (812)309-46-40  
**Саратов** (845)249-38-78  
**Севастополь** (8692)22-31-93  
**Саранск** (8342)22-96-24  
**Симферополь** (3652)67-13-56  
**Смоленск** (4812)29-41-54  
**Сочи** (862)225-72-31  
**Ставрополь** (8652)20-65-13  
**Сургут** (3462)77-98-35  
**Сыктывкар** (8212)25-95-17  
**Тамбов** (4752)50-40-97  
**Тверь** (4822)63-31-35


**Тольятти** (8482)63-91-07  
**Томск** (3822)98-41-53  
**Тула** (4872)33-79-87  
**Тюмень** (3452)66-21-18  
**Ульяновск** (8422)24-23-59  
**Улан-Удэ** (3012)59-97-51  
**Уфа** (347)229-48-12  
**Хабаровск** (4212)92-98-04  
**Чебоксары** (8352)28-53-07  
**Челябинск** (351)202-03-61  
**Ставрополь** (8202)49-02-64  
**Чита** (3022)38-34-83  
**Якутск** (4112)23-90-97  
**Ярославль** (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(7172)727-132

Киргизия +996(312)96-26-47

<https://liv.nt-rt.ru/> || [vis@nt-rt.ru](mailto:vis@nt-rt.ru)

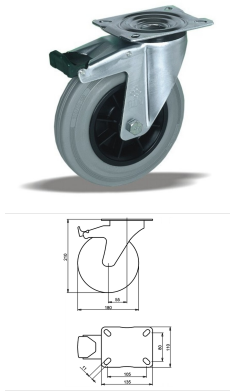

## Product description

stainless steel Swivel castor with brake with an overall height of 210 mm

Wheel diameter x width: 180 x 50 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with plain bearing and grey rubber tyre with hardness 83 ° shore A on polypropylene

the double brake system, brakes the turning of the wheel and the swivel rotation.

### Approved and tested load capacity

Dynamic 200 kg

Static 250 kg

### Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

### Advantages of this Floor floor turns Swivel castor with brake:

- ✓ preservation
- ✓ and steam proof
- ✓ obstacle smooth pass

## LIV SYSTEMS stainless steel Swivel castor with brake + grey rubber tyre Ø180 x W50mm for 200kg Prod ID: 41904

ID 41904: Castor overall height 210 mm | 4 mounting holes with distance 105x80 mm | Wheel with plain bearing and grey rubber tyre with hardness 83 ° shore A | The double brake system, brakes the turning of the wheel and the swivel rotation. | Floor floor

## Product information


- Article code 2-940 ISO
- SKU 41904
- EAN 3838461419041

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

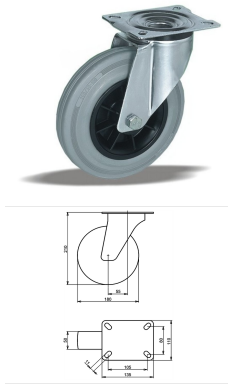

## Product description

stainless steel Swivel castor with an overall height of 210 mm

Wheel diameter x width: 180 x 50 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with plain bearing and grey rubber tyre with hardness 83 ° shore A on polypropylene.

### Approved and tested load capacity

Dynamic 200 kg

Static 250 kg

### Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

### Advantages of this Floor floor turns Swivel castor:

- ✓ preservation
- ✓ and steam proof
- ✓ obstacle smooth pass

## LIV SYSTEMS stainless steel Swivel castor + grey rubber tyre Ø180 x W50mm for 200kg Prod ID: 41875

ID 41875: Castor overall height 210 mm | 4 mounting holes with distance 105x80 mm | Wheel with plain bearing and grey rubber tyre with hardness 83 ° shore A | Floor floor turns, floor preservation, wet and steam proof, low obstacle smooth pass

## Product information


- Article code 2-926 ISO
- SKU 41875
- EAN 3838461418754

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

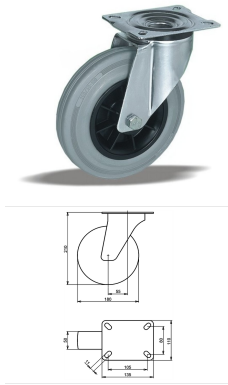

## Product description

stainless steel Swivel castor with an overall height of 210 mm

Wheel diameter x width: 180 x 50 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with roller bearing and grey rubber tyre with hardness 83 ° shore A on polypropylene.

### Approved and tested load capacity

Dynamic 200 kg

Static 250 kg

### Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

### Advantages of this Floor floor turns Swivel castor:

- ✓ preservation
- ✓ and steam proof
- ✓ obstacle smooth pass

## LIV SYSTEMS stainless steel Swivel castor + grey rubber tyre Ø180 x W50mm for 200kg Prod ID: 41874

ID 41874: Castor overall height 210 mm | 4 mounting holes with distance 105x80 mm | Wheel with roller bearing and grey rubber tyre with hardness 83 ° shore A | Floor floor turns, floor preservation, wet and steam proof, low obstacle smooth pass

## Product information


- Article code 2-919 ISO
- SKU 41874
- EAN 3838461418747

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

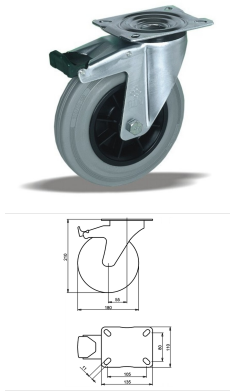

## Product description

stainless steel Swivel castor with brake with an overall height of 210 mm

Wheel diameter x width: 180 x 50 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with roller bearing and grey rubber tyre with hardness 83 ° shore A on polypropylene

the double brake system, brakes the turning of the wheel and the swivel rotation.

### Approved and tested load capacity

Dynamic 200 kg

Static 250 kg

### Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

### Advantages of this Floor floor turns Swivel castor with brake:

- ✓ preservation
- ✓ and steam proof
- ✓ obstacle smooth pass

## LIV SYSTEMS stainless steel Swivel castor with brake + grey rubber tyre Ø180 x W50mm for 200kg Prod ID: 41903

ID 41903: Castor overall height 210 mm | 4 mounting holes with distance 105x80 mm | Wheel with roller bearing and grey rubber tyre with hardness 83 ° shore A | The double brake system, brakes the turning of the wheel and the swivel rotation. | Floor floo

## Product information


- Article code 2-933 ISO
- SKU 41903
- EAN 3838461419034

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)



## Product description

stainless steel Swivel castor with an overall height of 210 mm

Wheel diameter x width: 180 x 50 mm

Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 93 mm

Wheel with plain bearing and grey rubber tyre with hardness 83 ° shore A on polypropylene.

### Approved and tested load capacity

Dynamic 200 kg

Static 250 kg

### Temperature range:

Continous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

### Advantages of this Floor floor turns Swivel castor:

- ✓ preservation
- ✓ and steam proof
- ✓ obstacle smooth pass

## LIV SYSTEMS stainless steel Swivel castor + grey rubber tyre Ø180 x W50mm for 200kg Prod ID: 41933

ID 41933: Castor overall height 210 mm | 4 mounting holes with distance #\$\$ mm | Wheel with plain bearing and grey rubber tyre with hardness 83 ° shore A | Floor floor turns, floor preservation, wet and steam proof, low obstacle smooth pass

## Product information


- Article code 2-977 L12
- SKU 41933
- EAN 3838461419331

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)



## Product description

stainless steel Swivel castor with an overall height of 210 mm

Wheel diameter x width: 180 x 50 mm

Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 93 mm

Wheel with roller bearing and grey rubber tyre with hardness 83 ° shore A on polypropylene.

### Approved and tested load capacity

Dynamic 200 kg

Static 250 kg

### Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

### Advantages of this Floor floor turns Swivel castor:

- ✓ preservation
- ✓ and steam proof
- ✓ obstacle smooth pass

## LIV SYSTEMS stainless steel Swivel castor + grey rubber tyre Ø180 x W50mm for 200kg Prod ID: 41925

ID 41925: Castor overall height 210 mm | 4 mounting holes with distance #\$\$ mm | Wheel with roller bearing and grey rubber tyre with hardness 83 ° shore A | Floor floor turns, floor preservation, wet and steam proof, low obstacle smooth pass

## Product information


- Article code 2-970 L12
- SKU 41925
- EAN 3838461419256

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

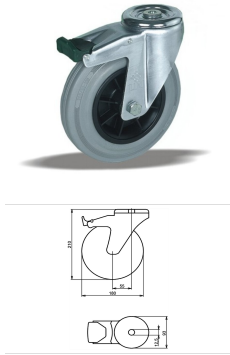

## Product description

stainless steel Swivel castor with brake with an overall height of 210 mm  
 Wheel diameter x width: 180 x 50 mm  
 Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 93 mm  
 Wheel with plain bearing and grey rubber tyre with hardness 83 ° shore A on polypropylene  
 the double brake system, brakes the turning of the wheel and the swivel rotation.

### Approved and tested load capacity

Dynamic 200 kg  
 Static 250 kg

### Temperature range:

Continious operation: -20 | +70°C  
 Short (10 min) exposure: -30 | +80°C

### Advantages of this Floor floor turns Swivel castor with brake:

- ✓ preservation
- ✓ and steam proof
- ✓ obstacle smooth pass

## LIV SYSTEMS stainless steel Swivel castor with brake + grey rubber tyre Ø180 x W50mm for 200kg Prod ID: 41955

ID 41955: Castor overall height 210 mm | 4 mounting holes with distance #\$\$ mm | Wheel with plain bearing and grey rubber tyre with hardness 83 ° shore A | The double brake system, brakes the turning of the wheel and the swivel rotation. | Floor floor tu

## Product information

- Article code 2-991 L12
- SKU 41955
- EAN 3838461419553


## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)



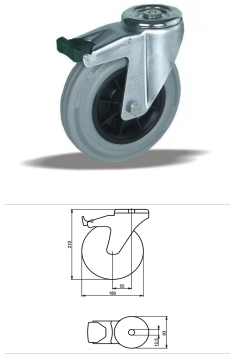

## Product description

stainless steel Swivel castor with brake with an overall height of 210 mm  
 Wheel diameter x width: 180 x 50 mm  
 Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 93 mm  
 Wheel with roller bearing and grey rubber tyre with hardness 83 ° shore A on polypropylene  
 the double brake system, brakes the turning of the wheel and the swivel rotation.

### Approved and tested load capacity

Dynamic 200 kg  
 Static 250 kg

### Temperature range:

Continious operation: -20 | +70°C  
 Short (10 min) exposure: -30 | +80°C

### Advantages of this Floor floor turns Swivel castor with brake:

- ✓ preservation
- ✓ and steam proof
- ✓ obstacle smooth pass

## LIV SYSTEMS stainless steel Swivel castor with brake + grey rubber tyre Ø180 x W50mm for 200kg Prod ID: 41954

ID 41954: Castor overall height 210 mm | 4 mounting holes with distance #\$\$ mm | Wheel with roller bearing and grey rubber tyre with hardness 83 ° shore A | The double brake system, brakes the turning of the wheel and the swivel rotation. | Floor floor t


## Product information

- Article code 2-984 L12
- SKU 41954
- EAN 3838461419546

## Specifications

The result of our quality is maximum performance!

[Close](#)  
[Close](#)

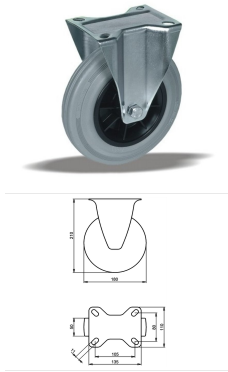

## Product description

stainless steel Fixed castor with an overall height of 210 mm

Wheel diameter x width: 180 x 50 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with plain bearing and grey rubber tyre with hardness 83 ° shore A on polypropylene.

### Approved and tested load capacity

Dynamic 200 kg

Static 250 kg

### Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

### Advantages of this Floor floor turns Fixed castor:

- ✓ preservation
- ✓ and steam proof
- ✓ obstacle smooth pass

## LIV SYSTEMS stainless steel Fixed castor + grey rubber tyre Ø180 x W50mm for 200kg Prod ID: 41853

ID 41853: Castor overall height 210 mm | 4 mounting holes with distance 105x80 mm | Wheel with plain bearing and grey rubber tyre with hardness 83 ° shore A | Floor floor turns, floor preservation, wet and steam proof, low obstacle smooth pass

## Product information


- Article code 2-963 ISO
- SKU 41853
- EAN 3838461418532

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

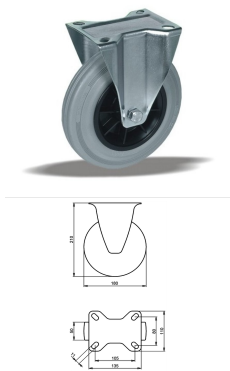

## Product description

stainless steel Fixed castor with an overall height of 210 mm

Wheel diameter x width: 180 x 50 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with roller bearing and grey rubber tyre with hardness 83 ° shore A on polypropylene.

### Approved and tested load capacity

Dynamic 200 kg

Static 250 kg

### Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

### Advantages of this Floor floor turns Fixed castor:

- ✓ preservation
- ✓ and steam proof
- ✓ obstacle smooth pass

## LIV SYSTEMS stainless steel Fixed castor + grey rubber tyre Ø180 x W50mm for 200kg Prod ID: 41845

ID 41845: Castor overall height 210 mm | 4 mounting holes with distance 105x80 mm | Wheel with roller bearing and grey rubber tyre with hardness 83 ° shore A | Floor floor turns, floor preservation, wet and steam proof, low obstacle smooth pass

## Product information

- Article code 2-956 ISO
- SKU 41845
- EAN 3838461418457

**Алматы** (7273)495-231  
**Ангарск** (3955)60-70-56  
**Архангельск** (8182)63-90-72  
**Астрахань** (8512)99-46-04  
**Барнаул** (3852)73-04-60  
**Белгород** (4722)40-23-64  
**Благовещенск** (4162)22-76-07  
**Брянск** (4832)59-03-52  
**Владивосток** (423)249-28-31  
**Владикавказ** (8672)28-90-48  
**Владимир** (4922)49-43-18  
**Волгоград** (844)278-03-48  
**Вологда** (8172)26-41-59  
**Воронеж** (473)204-51-73  
**Екатеринбург** (343)384-55-89

**Иваново** (4932)77-34-06  
**Ижевск** (3412)26-03-58  
**Иркутск** (395)279-98-46  
**Казань** (843)206-01-48  
**Калининград** (4012)72-03-81  
**Калуга** (4842)92-23-67  
**Кемерово** (3842)65-04-62  
**Киров** (8332)68-02-04  
**Коломна** (4966)23-41-49  
**Кострома** (4942)77-07-48  
**Краснодар** (861)203-40-90  
**Красноярск** (391)204-63-61  
**Курск** (4712)77-13-04  
**Курган** (3522)50-90-47  
**Липецк** (4742)52-20-81

**Магнитогорск** (3519)55-03-13  
**Москва** (495)268-04-70  
**Мурманск** (8152)59-64-93  
**Набережные Челны** (8552)20-53-41  
**Нижний Новгород** (831)429-08-12  
**Новокузнецк** (3843)20-46-81  
**Ноябрьск** (3496)41-32-12  
**Новосибирск** (383)227-86-73  
**Омск** (3812)21-46-40  
**Орел** (4862)44-53-42  
**Оренбург** (3532)37-68-04  
**Пенза** (8412)22-31-16  
**Петрозаводск** (8142)55-98-37  
**Псков** (8112)59-10-37  
**Пермь** (342)205-81-47

**Ростов-на-Дону** (863)308-18-15  
**Рязань** (4912)46-61-64  
**Самара** (846)206-03-16  
**Санкт-Петербург** (812)309-46-40  
**Саратов** (845)249-38-78  
**Саранск** (8342)22-96-24  
**Симферополь** (3652)67-13-56  
**Смоленск** (4812)29-41-54  
**Сочи** (862)225-72-31  
**Ставрополь** (8652)20-65-13  
**Сургут** (3462)77-98-35  
**Сыктывкар** (8212)25-95-17  
**Тамбов** (4752)50-40-97  
**Тверь** (4822)63-31-35

**Тольятти** (8482)63-91-07  
**Томск** (3822)98-41-53  
**Тула** (4872)33-79-87  
**Тюмень** (3452)66-21-18  
**Ульяновск** (8422)24-23-59  
**Улан-Удэ** (3012)59-97-51  
**Уфа** (347)229-48-12  
**Хабаровск** (4212)92-98-04  
**Чебоксары** (8352)28-53-07  
**Челябинск** (351)202-03-61  
**Череповец** (8202)49-02-64  
**Чита** (3022)38-34-83  
**Якутск** (4112)23-90-97  
**Ярославль** (4852)69-52-93

**Россия** +7(495)268-04-70

**Казахстан** +7(7172)727-132

**Киргизия** +996(312)96-26-47

<https://liv.nt-rt.ru/> || [vis@nt-rt.ru](mailto:vis@nt-rt.ru)