



Product description

stainless steel Wheel with ball bearing and elastic rubber tyre with hardness 70 ° Shore A on polyamide

Wheel diameter x width: 160 x 50 mm

Axle hole: 20 mm

Hub length: 58 mm

Approved and tested load capacity

Dynamic 350 kg

Static 430 kg

Temperature range:

Continuous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

Advantages of this Tile floor ride wheel:

- ✓ absorbing
- ✓ ride over obstacles
- ✓ to keep clean

LIV SYSTEMS stainless steel wheel + elastic rubber tyre Ø160 x W50mm for 350kg Prod ID: 42303

ID 42303:stainless steel Wheel with ball bearing and elastic rubber tyre with hardness 70 ° Shore A on polyamide | Axle hole: 20 mm | Hub length: 58 mm | Tile floor ride, shock absorbing, smooth ride over obstacles, easy to keep clean

Product information

- Article code 2-040-32K
- SKU 42303
- EAN 3838461423031

Алматы (7273)495-231
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(7172)727-132

Киргизия +996(312)96-26-47

<https://liv.nt-rt.ru/> || vis@nt-rt.ru



Product description

stainless steel Wheel with ball bearing and elastic rubber tyre with hardness 70 ° Shore A on polyamide

Wheel diameter x width: 160 x 50 mm

Axle hole: 20 mm

Hub length: 58 mm

Approved and tested load capacity

Dynamic 350 kg

Static 430 kg

Temperature range:

Continuous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

Advantages of this Tile floor ride wheel:

- ✓ absorbing
- ✓ ride over obstacles
- ✓ to keep clean


LIV SYSTEMS stainless steel wheel + elastic rubber tyre Ø160 x W50mm for 350kg Prod ID: 42303

ID 42303:stainless steel Wheel with ball bearing and elastic rubber tyre with hardness 70 ° Shore A on polyamide |

Axle hole: 20 mm | Hub length: 58 mm | Tile floor ride, shock absorbing, smooth ride over obstacles, easy to keep clean

Product information

- Article code 2-040-32K
- SKU 42303
- EAN 3838461423031



Product description

stainless steel Fixed castor with an overall height of 190 mm

Wheel diameter x width: 160 x 50 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with ball bearing and elastic rubber tyre with hardness 70 ° Shore A on polyamide.

Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

Temperature range:

Continuous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

Advantages of this Tile floor ride Fixed castor:

- ✓ absorbing
- ✓ ride over obstacles
- ✓ to keep clean

LIV SYSTEMS stainless steel Fixed castor + elastic rubber tyre Ø160 x W50mm for 300kg Prod ID: 42225

ID 42225: Castor overall height 190 mm | 4 mounting holes with distance 105x80 mm | Wheel with ball bearing and elastic rubber tyre with hardness 70 ° Shore A | Tile floor ride, shock absorbing, smooth ride over obstacles, easy to keep clean

Product information


- Article code 2-041-32K
- SKU 42225
- EAN 3838461422256

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

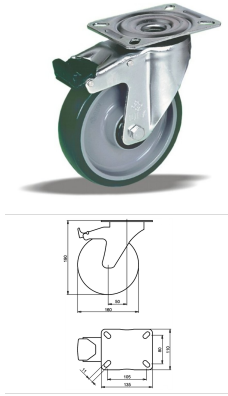

Product description

stainless steel Swivel castor with brake with an overall height of 190 mm

Wheel diameter x width: 160 x 50 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with ball bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A on polyamide

the double brake system, brakes the turning of the wheel and the swivel rotation.

Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

Temperature range:

Continuous operation: -25 | +55°C

Short (10 min) exposure: -30 | +55°C

Advantages of this No trail highway drive Swivel castor with brake:

- ✓ deformation if rarely moved
- ✓ range of temperatures
- ✓ resistant

LIV SYSTEMS stainless steel Swivel castor with brake + injection-moulded polyurethane tread Ø160 x W50mm for 300kg Prod ID: 42185

ID 42185: Castor overall height 190 mm | 4 mounting holes with distance 105x80 mm | Wheel with ball bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A | The double brake system, brakes the turning of the wheel and the swivel rotation

Product information


- Article code 2-053-32K
- SKU 42185
- EAN 3838461421853

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

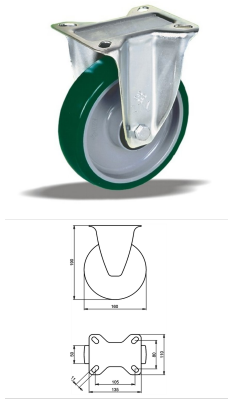

Product description

stainless steel Fixed castor with an overall height of 190 mm

Wheel diameter x width: 160 x 50 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with plain bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A on polyamide.

Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

Temperature range:

Continuous operation: -25 | +55°C

Short (10 min) exposure: -30 | +55°C

Advantages of this No trail highway drive Fixed castor:

- ✓ deformation if rarely moved
- ✓ range of temperatures
- ✓ resistant

LIV SYSTEMS stainless steel Fixed castor + injection-moulded polyurethane tread Ø160 x W50mm for 300kg Prod

ID: 41704

ID 41704: Castor overall height 190 mm | 4 mounting holes with distance 105x80 mm | Wheel with plain bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A | No trail highway drive, low deformation if rarely moved, wide range of tempe

Product information

- Article code 2-051-32D
- SKU 41704
- EAN 3838461417047

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)



Product description

stainless steel Wheel with roller bearing and elastic rubber tyre with hardness 70 ° Shore A on polyamide

Wheel diameter x width: 160 x 50 mm

Axle hole: 20 mm

Hub length: 58 mm

Approved and tested load capacity

Dynamic 350 kg

Static 430 kg

Temperature range:

Continuous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

Advantages of this Tile floor ride wheel:

- ✓ absorbing
- ✓ ride over obstacles
- ✓ to keep clean


LIV SYSTEMS stainless steel wheel + elastic rubber tyre Ø160 x W50mm for 350kg Prod ID: 42305

ID 42305: stainless steel Wheel with roller bearing and elastic rubber tyre with hardness 70 ° Shore A on polyamide |

Axle hole: 20 mm | Hub length: 58 mm | Tile floor ride, shock absorbing, smooth ride over obstacles, easy to keep clean

Product information

- Article code 2-040-32V
- SKU 42305
- EAN 3838461423055

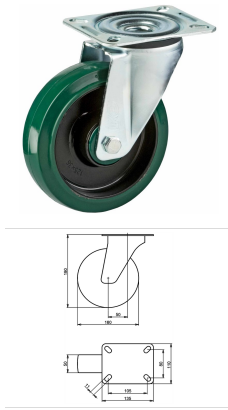

Product description

stainless steel Swivel castor with an overall height of 190 mm

Wheel diameter x width: 160 x 50 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with plain bearing and elastic rubber tyre with hardness 70 ° Shore A on polyamide.

Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

Temperature range:

Continuous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

Advantages of this Tile floor ride Swivel castor:

- ✓ absorbing
- ✓ ride over obstacles
- ✓ to keep clean

LIV SYSTEMS stainless steel Swivel castor + elastic rubber tyre Ø160 x W50mm for 300kg Prod ID: 41784

ID 41784: Castor overall height 190 mm | 4 mounting holes with distance 105x80 mm | Wheel with plain bearing and elastic rubber tyre with hardness 70 ° Shore A | Tile floor ride, shock absorbing, smooth ride over obstacles, easy to keep clean

Product information


- Article code 2-042-32D
- SKU 41784
- EAN 3838461417849

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

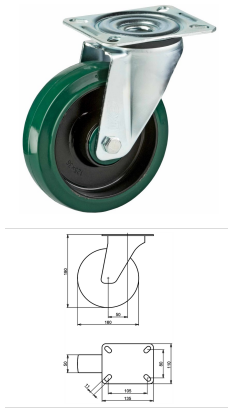

Product description

stainless steel Swivel castor with an overall height of 190 mm

Wheel diameter x width: 160 x 50 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with ball bearing and elastic rubber tyre with hardness 70 ° Shore A on polyamide.

Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

Temperature range:

Continuous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

Advantages of this Tile floor ride Swivel castor:

- ✓ absorbing
- ✓ ride over obstacles
- ✓ to keep clean

LIV SYSTEMS stainless steel Swivel castor + elastic rubber tyre Ø160 x W50mm for 300kg Prod ID: 42243

ID 42243: Castor overall height 190 mm | 4 mounting holes with distance 105x80 mm | Wheel with ball bearing and elastic rubber tyre with hardness 70 ° Shore A | Tile floor ride, shock absorbing, smooth ride over obstacles, easy to keep clean

Product information

- Article code 2-042-32K
- SKU 42243
- EAN 3838461422430

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)



Product description

stainless steel Swivel castor with brake with an overall height of 190 mm

Wheel diameter x width: 160 x 50 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with plain bearing and elastic rubber tyre with hardness 70 ° Shore A on polyamide

the double brake system, brakes the turning of the wheel and the swivel rotation.

Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

Temperature range:

Continuous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

Advantages of this Tile floor ride Swivel castor with brake:

- ✓ absorbing
- ✓ ride over obstacles
- ✓ to keep clean

LIV SYSTEMS stainless steel Swivel castor with brake + elastic rubber tyre Ø160 x W50mm for 300kg Prod ID: 41795

ID 41795: Castor overall height 190 mm | 4 mounting holes with distance 105x80 mm | Wheel with plain bearing and elastic rubber tyre with hardness 70 ° Shore A | The double brake system, brakes the turning of the wheel and the swivel rotation. | Tile floor

Product information

- Article code 2-043-32D
- SKU 41795
- EAN 3838461417955

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)



Product description

stainless steel Swivel castor with brake with an overall height of 190 mm

Wheel diameter x width: 160 x 50 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with ball bearing and elastic rubber tyre with hardness 70 ° Shore A on polyamide

the double brake system, brakes the turning of the wheel and the swivel rotation.

Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

Temperature range:

Continuous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

Advantages of this Tile floor ride Swivel castor with brake:

- ✓ absorbing
- ✓ ride over obstacles
- ✓ to keep clean

LIV SYSTEMS stainless steel Swivel castor with brake + elastic rubber tyre Ø160 x W50mm for 300kg Prod ID: 42254

ID 42254: Castor overall height 190 mm | 4 mounting holes with distance 105x80 mm | Wheel with ball bearing and elastic rubber tyre with hardness 70 ° Shore A | The double brake system, brakes the turning of the wheel and the swivel rotation. | Tile floor

Product information


- Article code 2-043-32K
- SKU 42254
- EAN 3838461422546

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)



Product description

stainless steel Swivel castor with an overall height of 232 mm

Wheel diameter x width: 160 x 50 mm

Top plate with 4 mounting holes of 12,5 mm, mounting hole distance 93 mm and top plate outer dimensions: 93 mm

Wheel with plain bearing and elastic rubber tyre with hardness 70 ° Shore A on polyamide.

Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

Temperature range:

Continuous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

Advantages of this Tile floor ride Swivel castor:

- ✓ absorbing
- ✓ ride over obstacles
- ✓ to keep clean

LIV SYSTEMS stainless steel Swivel castor + elastic rubber tyre Ø160 x W50mm for 300kg Prod ID: 41813

ID 41813: Castor overall height 232 mm | 4 mounting holes with distance 93 mm | Wheel with plain bearing and elastic rubber tyre with hardness 70 ° Shore A | Tile floor ride, shock absorbing, smooth ride over obstacles, easy to keep clean

Product information


- Article code 2-044-32D
- SKU 41813
- EAN 3838461418136

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)



Product description

stainless steel Swivel castor with an overall height of 190 mm

Wheel diameter x width: 160 x 50 mm

Top plate with 4 mounting holes of 12,5 mm, mounting hole distance 93 mm and top plate outer dimensions: 93 mm

Wheel with ball bearing and elastic rubber tyre with hardness 70 ° Shore A on polyamide.

Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

Temperature range:

Continuous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

Advantages of this Tile floor ride Swivel castor:

- ✓ absorbing
- ✓ ride over obstacles
- ✓ to keep clean

LIV SYSTEMS stainless steel Swivel castor + elastic rubber tyre Ø160 x W50mm for 300kg Prod ID: 42265

ID 42265: Castor overall height 190 mm | 4 mounting holes with distance 93 mm | Wheel with ball bearing and elastic rubber tyre with hardness 70 ° Shore A | Tile floor ride, shock absorbing, smooth ride over obstacles, easy to keep clean

Product information

- Article code 2-044-32K
- SKU 42265
- EAN 3838461422652

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)



Product description

stainless steel Swivel castor with brake with an overall height of 190 mm

Wheel diameter x width: 160 x 50 mm

Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 93 mm

Wheel with plain bearing and elastic rubber tyre with hardness 70 ° Shore A on polyamide

the double brake system, brakes the turning of the wheel and the swivel rotation.

Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

Temperature range:

Continious operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

Advantages of this Tile floor ride Swivel castor with brake:

- ✓ absorbing
- ✓ ride over obstacles
- ✓ to keep clean

LIV SYSTEMS stainless steel Swivel castor with brake + elastic rubber tyre Ø160 x W50mm for 300kg Prod ID:

41824

ID 41824: Castor overall height 190 mm | 4 mounting holes with distance #\$\$ mm | Wheel with plain bearing and elastic rubber tyre with hardness 70 ° Shore A | The double brake system, brakes the turning of the wheel and the swivel rotation. | Tile floor r

Product information

- Article code 2-045-32D
- SKU 41824
- EAN 3838461418242

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)



Product description

stainless steel Swivel castor with brake with an overall height of 190 mm

Wheel diameter x width: 160 x 50 mm

Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 93 mm

Wheel with ball bearing and elastic rubber tyre with hardness 70 ° Shore A on polyamide

the double brake system, brakes the turning of the wheel and the swivel rotation.

Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

Temperature range:

Continious operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

Advantages of this Tile floor ride Swivel castor with brake:

- ✓ absorbing
- ✓ ride over obstacles
- ✓ to keep clean

LIV SYSTEMS stainless steel Swivel castor with brake + elastic rubber tyre Ø160 x W50mm for 300kg Prod ID:

42283

ID 42283: Castor overall height 190 mm | 4 mounting holes with distance #\$\$ mm | Wheel with ball bearing and elastic rubber tyre with hardness 70 ° Shore A | The double brake system, brakes the turning of the wheel and the swivel rotation. | Tile floor ri

Product information


- Article code 2-045-32K
- SKU 42283
- EAN 3838461422836

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)



Product description

stainless steel Fixed castor with an overall height of 190 mm

Wheel diameter x width: 160 x 50 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with plain bearing and elastic rubber tyre with hardness 70 ° Shore A on polyamide.

Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

Temperature range:

Continuous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

Advantages of this Tile floor ride Fixed castor:

- ✓ absorbing
- ✓ ride over obstacles
- ✓ to keep clean

LIV SYSTEMS stainless steel Fixed castor + elastic rubber tyre Ø160 x W50mm for 300kg Prod ID: 41773

ID 41773: Castor overall height 190 mm | 4 mounting holes with distance 105x80 mm | Wheel with plain bearing and elastic rubber tyre with hardness 70 ° Shore A | Tile floor ride, shock absorbing, smooth ride over obstacles, easy to keep clean

Product information


- Article code 2-041-32D
- SKU 41773
- EAN 3838461417733

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)



Product description

stainless steel Wheel with plain bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A on polyamide

Wheel diameter x width: 160 x 50 mm

Axle hole: 12,5 mm

Hub length: 58 mm

Approved and tested load capacity

Dynamic 400 kg

Static 500 kg

Temperature range:

Continuous operation: -25 | +55°C

Short (10 min) exposure: -30 | +55°C

Advantages of this No trail highway drive wheel:


- ✓ deform if stationed
- ✓ range of temperatures
- ✓ resistant

LIV SYSTEMS stainless steel wheel + injection-moulded polyurethane tread Ø160 x W50mm for 400kg Prod ID: 43105

ID 43105: stainless steel Wheel with plain bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A on polyamide | Axle hole: 12,5 mm | Hub length: 58 mm | No trail highway drive, low deform if stationed, wide range of temperatures, oil

Product information

- Article code 2-050-32D
- SKU 43105
- EAN 3838461431050



Product description

stainless steel Wheel with roller bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A on polyamide

Wheel diameter x width: 160 x 50 mm

Axle hole: 12,5 mm

Hub length: 58 mm

Approved and tested load capacity

Dynamic 400 kg

Static 500 kg

Temperature range:

Continuous operation: -25 | +55°C

Short (10 min) exposure: -30 | +55°C

Advantages of this No trail highway drive wheel:

- ✓ deform if stationed
- ✓ range of temperatures
- ✓ resistant

LIV SYSTEMS stainless steel wheel + injection-moulded polyurethane tread Ø160 x W50mm for 400kg Prod ID: 43104

ID 43104: stainless steel Wheel with roller bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A on polyamide | Axle hole: 12,5 mm | Hub length: 58 mm | No trail highway drive, low deform if stationed, wide range of temperatures, oil

Product information

- Article code 2-050-32V
- SKU 43104
- EAN 3838461431043



Product description

stainless steel Wheel with ball bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A on polyamide

Wheel diameter x width: 160 x 50 mm

Axle hole: 20 mm

Hub length: 58 mm

Approved and tested load capacity

Dynamic 400 kg

Static 500 kg

Temperature range:

Continuous operation: -25 | +55°C

Short (10 min) exposure: -30 | +55°C

Advantages of this No trail highway drive wheel:


- ✓ deform if stationed
- ✓ range of temperatures
- ✓ resistant

LIV SYSTEMS stainless steel wheel + injection-moulded polyurethane tread Ø160 x W50mm for 400kg Prod ID: 42294

ID 42294: stainless steel Wheel with ball bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A on polyamide | Axle hole: 20 mm | Hub length: 58 mm | No trail highway drive, low deform if stationed, wide range of temperatures, oil res

Product information

- Article code 2-050-32K
- SKU 42294
- EAN 3838461422942

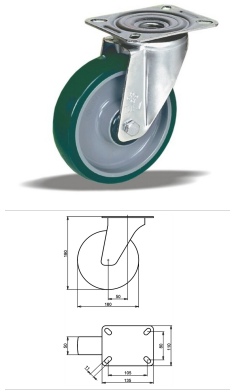

Product description

stainless steel Swivel castor with an overall height of 190 mm

Wheel diameter x width: 160 x 50 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with plain bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A on polyamide.

Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

Temperature range:

Continuous operation: -25 | +55°C

Short (10 min) exposure: -30 | +55°C

Advantages of this No trail highway drive Swivel castor:

- ✓ deformation if rarely moved
- ✓ range of temperatures
- ✓ resistant

LIV SYSTEMS stainless steel Swivel castor + injection-moulded polyurethane tread Ø160 x W50mm for 300kg Prod ID: 41715

ID 41715: Castor overall height 190 mm | 4 mounting holes with distance 105x80 mm | Wheel with plain bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A | No trail highway drive, low deformation if rarely moved, wide range of tempe

Product information


- Article code 2-052-32D
- SKU 41715
- EAN 3838461417153

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

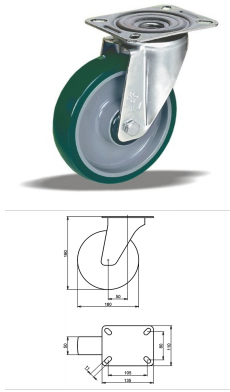

Product description

stainless steel Swivel castor with an overall height of 190 mm

Wheel diameter x width: 160 x 50 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with roller bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A on polyamide.

Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

Temperature range:

Continuous operation: -25 | +55°C

Short (10 min) exposure: -30 | +55°C

Advantages of this No trail highway drive Swivel castor:

- ✓ deformation if rarely moved
- ✓ range of temperatures
- ✓ resistant

LIV SYSTEMS stainless steel Swivel castor + injection-moulded polyurethane tread Ø160 x W50mm for 300kg Prod ID: 41714

ID 41714: Castor overall height 190 mm | 4 mounting holes with distance 105x80 mm | Wheel with roller bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A | No trail highway drive, low deformation if rarely moved, wide range of temp

Product information


- Article code 2-052-32V
- SKU 41714
- EAN 3838461417146

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

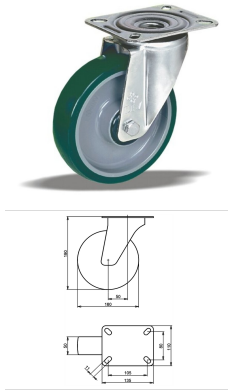

Product description

stainless steel Swivel castor with an overall height of 190 mm

Wheel diameter x width: 160 x 50 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with ball bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A on polyamide.

Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

Temperature range:

Continuous operation: -25 | +55°C

Short (10 min) exposure: -30 | +55°C

Advantages of this No trail highway drive Swivel castor:

- ✓ deformation if rarely moved
- ✓ range of temperatures
- ✓ resistant

LIV SYSTEMS stainless steel Swivel castor + injection-moulded polyurethane tread Ø160 x W50mm for 300kg Prod ID: 42174

ID 42174: Castor overall height 190 mm | 4 mounting holes with distance 105x80 mm | Wheel with ball bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A | No trail highway drive, low deformation if rarely moved, wide range of temper

Product information


- Article code 2-052-32K
- SKU 42174
- EAN 3838461421747

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

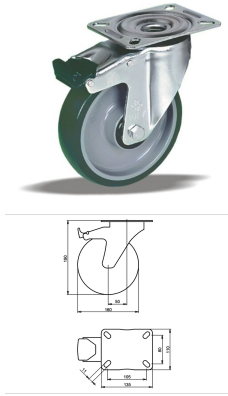

Product description

stainless steel Swivel castor with brake with an overall height of 190 mm

Wheel diameter x width: 160 x 50 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with plain bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A on polyamide

the double brake system, brakes the turning of the wheel and the swivel rotation.

Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

Temperature range:

Continuous operation: -25 | +55°C

Short (10 min) exposure: -30 | +55°C

Advantages of this No trail highway drive Swivel castor with brake:

- ✓ deformation if rarely moved
- ✓ range of temperatures
- ✓ resistant

LIV SYSTEMS stainless steel Swivel castor with brake + injection-moulded polyurethane tread Ø160 x W50mm for 300kg Prod ID: 41733

ID 41733: Castor overall height 190 mm | 4 mounting holes with distance 105x80 mm | Wheel with plain bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A | The double brake system, brakes the turning of the wheel and the swivel rota

Product information


- Article code 2-053-32D
- SKU 41733
- EAN 3838461417337

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

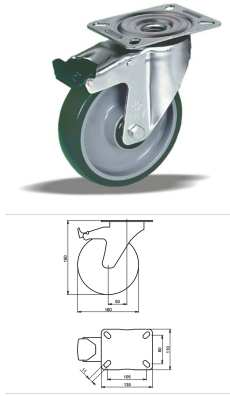

Product description

stainless steel Swivel castor with brake with an overall height of 190 mm

Wheel diameter x width: 160 x 50 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with roller bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A on polyamide

the double brake system, brakes the turning of the wheel and the swivel rotation.

Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

Temperature range:

Continuous operation: -25 | +55°C

Short (10 min) exposure: -30 | +55°C

Advantages of this No trail highway drive Swivel castor with brake:

- ✓ deformation if rarely moved
- ✓ range of temperatures
- ✓ resistant

LIV SYSTEMS stainless steel Swivel castor with brake + injection-moulded polyurethane tread Ø160 x W50mm for 300kg Prod ID: 41725

ID 41725: Castor overall height 190 mm | 4 mounting holes with distance 105x80 mm | Wheel with roller bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A | The double brake system, brakes the turning of the wheel and the swivel rot

Product information


- Article code 2-053-32V
- SKU 41725
- EAN 3838461417252

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

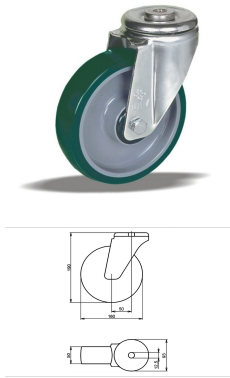

Product description

stainless steel Swivel castor with an overall height of 190 mm

Wheel diameter x width: 160 x 50 mm

Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 93 mm

Wheel with plain bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A on polyamide.

Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

Temperature range:

Continious operation: -25 | +55°C

Short (10 min) exposure: -30 | +55°C

Advantages of this No trail highway drive Swivel castor:

- ✓ deformation if rarely moved
- ✓ range of temperatures
- ✓ resistant

LIV SYSTEMS stainless steel Swivel castor + injection-moulded polyurethane tread Ø160 x W50mm for 300kg Prod ID: 41744

ID 41744: Castor overall height 190 mm | 4 mounting holes with distance #\$\$ mm | Wheel with plain bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A | No trail highway drive, low deformation if rarely moved, wide range of temperat

Product information


- Article code 2-054-32D
- SKU 41744
- EAN 3838461417443

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

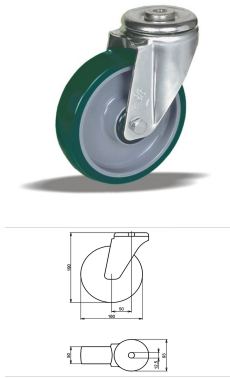

Product description

stainless steel Swivel castor with an overall height of 190 mm

Wheel diameter x width: 160 x 50 mm

Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 93 mm

Wheel with roller bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A on polyamide.

Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

Temperature range:

Continuous operation: -25 | +55°C

Short (10 min) exposure: -30 | +55°C

Advantages of this No trail highway drive Swivel castor:

- ✓ deformation if rarely moved
- ✓ range of temperatures
- ✓ resistant

LIV SYSTEMS stainless steel Swivel castor + injection-moulded polyurethane tread Ø160 x W50mm for 300kg Prod ID: 41743

ID 41743: Castor overall height 190 mm | 4 mounting holes with distance #\$\$ mm | Wheel with roller bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A | No trail highway drive, low deformation if rarely moved, wide range of tempera

Product information


- Article code 2-054-32V
- SKU 41743
- EAN 3838461417436

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

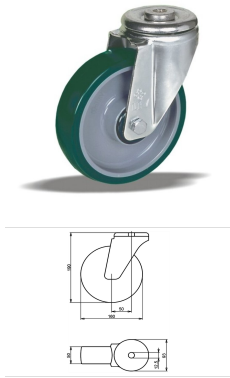

Product description

stainless steel Swivel castor with an overall height of 190 mm

Wheel diameter x width: 160 x 50 mm

Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 93 mm

Wheel with ball bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A on polyamide.

Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

Temperature range:

Continuous operation: -25 | +55°C

Short (10 min) exposure: -30 | +55°C

Advantages of this No trail highway drive Swivel castor:

- ✓ deformation if rarely moved
- ✓ range of temperatures
- ✓ resistant

LIV SYSTEMS stainless steel Swivel castor + injection-moulded polyurethane tread Ø160 x W50mm for 300kg Prod ID: 42203

ID 42203: Castor overall height 190 mm | 4 mounting holes with distance #\$\$ mm | Wheel with ball bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A | No trail highway drive, low deformation if rarely moved, wide range of temperatu

Product information


- Article code 2-054-32K
- SKU 42203
- EAN 3838461422034

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

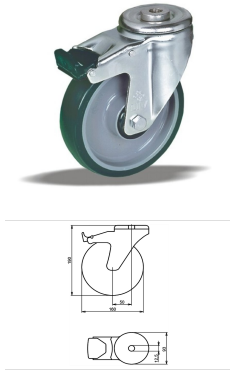

Product description

stainless steel Swivel castor with brake with an overall height of 190 mm

Wheel diameter x width: 160 x 50 mm

Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 93 mm

Wheel with plain bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A on polyamide

the double brake system, brakes the turning of the wheel and the swivel rotation.

Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

Temperature range:

Continious operation: -25 | +55°C

Short (10 min) exposure: -30 | +55°C

Advantages of this No trail highway drive Swivel castor with brake:

- ✓ deformation if rarely moved
- ✓ range of temperatures
- ✓ resistant

LIV SYSTEMS stainless steel Swivel castor with brake + injection-moulded polyurethane tread Ø160 x W50mm for 300kg Prod ID: 41755

ID 41755: Castor overall height 190 mm | 4 mounting holes with distance #\$\$ mm | Wheel with plain bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A | The double brake system, brakes the turning of the wheel and the swivel rotatio

Product information


- Article code 2-055-32D
- SKU 41755
- EAN 3838461417559

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

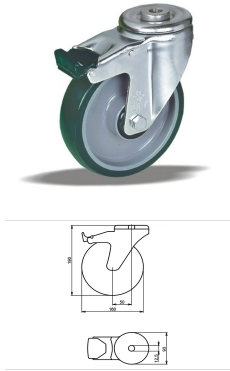

Product description

stainless steel Swivel castor with brake with an overall height of 190 mm

Wheel diameter x width: 160 x 50 mm

Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 93 mm

Wheel with roller bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A on polyamide

the double brake system, brakes the turning of the wheel and the swivel rotation.

Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

Temperature range:

Continious operation: -25 | +55°C

Short (10 min) exposure: -30 | +55°C

Advantages of this No trail highway drive Swivel castor with brake:

- ✓ deformation if rarely moved
- ✓ range of temperatures
- ✓ resistant

LIV SYSTEMS stainless steel Swivel castor with brake + injection-moulded polyurethane tread Ø160 x W50mm for 300kg Prod ID: 41754

ID 41754: Castor overall height 190 mm | 4 mounting holes with distance #\$\$ mm | Wheel with roller bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A | The double brake system, brakes the turning of the wheel and the swivel rotati

Product information


- Article code 2-055-32V
- SKU 41754
- EAN 3838461417542

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

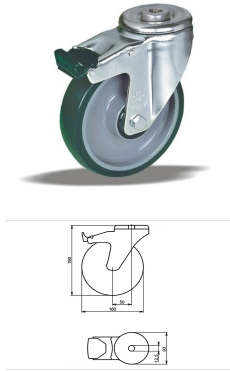

Product description

stainless steel Swivel castor with brake with an overall height of 190 mm
 Wheel diameter x width: 160 x 50 mm
 Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 93 mm
 Wheel with ball bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A on polyamide
 the double brake system, brakes the turning of the wheel and the swivel rotation.

Approved and tested load capacity

Dynamic 300 kg
 Static 370 kg

Temperature range:

Continious operation: -25 | +55°C
 Short (10 min) exposure: -30 | +55°C

Advantages of this No trail highway drive Swivel castor with brake:

- ✓ deformation if rarely moved
- ✓ range of temperatures
- ✓ resistant

LIV SYSTEMS stainless steel Swivel castor with brake + injection-moulded polyurethane tread Ø160 x W50mm for 300kg Prod ID: 42214

ID 42214: Castor overall height 190 mm | 4 mounting holes with distance #\$\$ mm | Wheel with ball bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A | The double brake system, brakes the turning of the wheel and the swivel rotation

Product information


- Article code 2-055-32K
- SKU 42214
- EAN 3838461422140

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

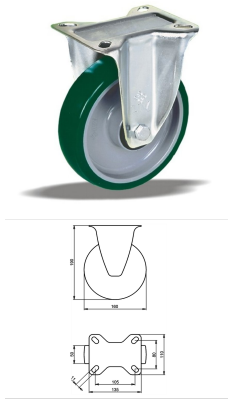

Product description

stainless steel Fixed castor with an overall height of 190 mm

Wheel diameter x width: 160 x 50 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with roller bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A on polyamide.

Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

Temperature range:

Continuous operation: -25 | +55°C

Short (10 min) exposure: -30 | +55°C

Advantages of this No trail highway drive Fixed castor:

- ✓ deformation if rarely moved
- ✓ range of temperatures
- ✓ resistant

LIV SYSTEMS stainless steel Fixed castor + injection-moulded polyurethane tread Ø160 x W50mm for 300kg Prod

ID: 41703

ID 41703: Castor overall height 190 mm | 4 mounting holes with distance 105x80 mm | Wheel with roller bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A | No trail highway drive, low deformation if rarely moved, wide range of temp

Product information


- Article code 2-051-32V
- SKU 41703
- EAN 3838461417030

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

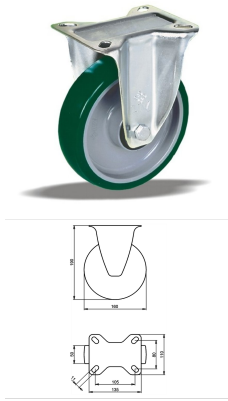

Product description

stainless steel Fixed castor with an overall height of 190 mm

Wheel diameter x width: 160 x 50 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with ball bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A on polyamide.

Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

Temperature range:

Continuous operation: -25 | +55°C

Short (10 min) exposure: -30 | +55°C

Advantages of this No trail highway drive Fixed castor:

- ✓ deformation if rarely moved
- ✓ range of temperatures
- ✓ resistant

LIV SYSTEMS stainless steel Fixed castor + injection-moulded polyurethane tread Ø160 x W50mm for 300kg Prod

ID: 42163

ID 42163: Castor overall height 190 mm | 4 mounting holes with distance 105x80 mm | Wheel with ball bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A | No trail highway drive, low deformation if rarely moved, wide range of temper

Product information


- Article code 2-051-32K
- SKU 42163
- EAN 3838461421631

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

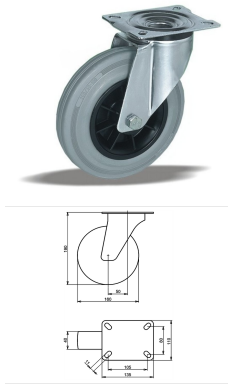

Product description

stainless steel Swivel castor with an overall height of 190 mm

Wheel diameter x width: 160 x 40 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with plain bearing and grey rubber tyre with hardness 83 ° shore A on polypropylene.

Approved and tested load capacity

Dynamic 180 kg

Static 220 kg

Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

Advantages of this Floor floor turns Swivel castor:

- ✓ preservation
- ✓ and steam proof
- ✓ obstacle smooth pass

LIV SYSTEMS stainless steel Swivel castor + grey rubber tyre Ø160 x W40mm for 180kg Prod ID: 41873

ID 41873: Castor overall height 190 mm | 4 mounting holes with distance 105x80 mm | Wheel with plain bearing and grey rubber tyre with hardness 83 ° shore A | Floor floor turns, floor preservation, wet and steam proof, low obstacle smooth pass

Product information


- Article code 2-925 ISO
- SKU 41873
- EAN 3838461418730

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

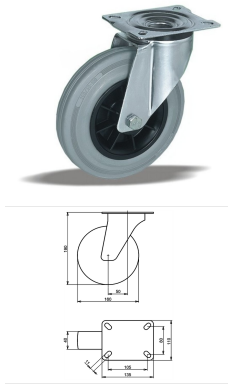

Product description

stainless steel Swivel castor with an overall height of 190 mm

Wheel diameter x width: 160 x 40 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with roller bearing and grey rubber tyre with hardness 83 ° shore A on polypropylene.

Approved and tested load capacity

Dynamic 180 kg

Static 220 kg

Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

Advantages of this Floor floor turns Swivel castor:

- ✓ preservation
- ✓ and steam proof
- ✓ obstacle smooth pass

LIV SYSTEMS stainless steel Swivel castor + grey rubber tyre Ø160 x W40mm for 180kg Prod ID: 41865

ID 41865: Castor overall height 190 mm | 4 mounting holes with distance 105x80 mm | Wheel with roller bearing and grey rubber tyre with hardness 83 ° shore A | Floor floor turns, floor preservation, wet and steam proof, low obstacle smooth pass

Product information


- Article code 2-918 ISO
- SKU 41865
- EAN 3838461418655

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

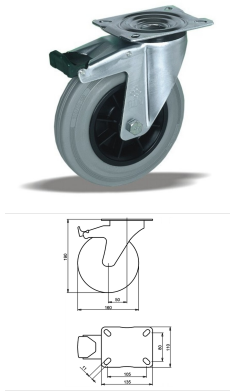

Product description

stainless steel Swivel castor with brake with an overall height of 190 mm

Wheel diameter x width: 160 x 40 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with plain bearing and grey rubber tyre with hardness 83 ° shore A on polypropylene

the double brake system, brakes the turning of the wheel and the swivel rotation.

Approved and tested load capacity

Dynamic 180 kg

Static 220 kg

Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

Advantages of this Floor floor turns Swivel castor with brake:

- ✓ preservation
- ✓ and steam proof
- ✓ obstacle smooth pass

LIV SYSTEMS stainless steel Swivel castor with brake + grey rubber tyre Ø160 x W40mm for 180kg Prod ID: 41895

ID 41895: Castor overall height 190 mm | 4 mounting holes with distance 105x80 mm | Wheel with plain bearing and grey rubber tyre with hardness 83 ° shore A | The double brake system, brakes the turning of the wheel and the swivel rotation. | Floor floor

Product information


- Article code 2-939 ISO
- SKU 41895
- EAN 3838461418952

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

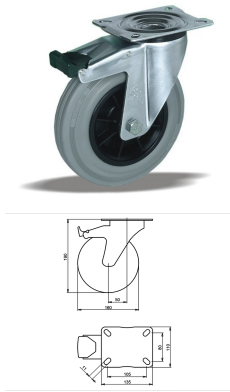

Product description

stainless steel Swivel castor with brake with an overall height of 190 mm

Wheel diameter x width: 160 x 40 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with roller bearing and grey rubber tyre with hardness 83 ° shore A on polypropylene

the double brake system, brakes the turning of the wheel and the swivel rotation.

Approved and tested load capacity

Dynamic 180 kg

Static 220 kg

Temperature range:

Continious operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

Advantages of this Floor floor turns Swivel castor with brake:

- ✓ preservation
- ✓ and steam proof
- ✓ obstacle smooth pass

LIV SYSTEMS stainless steel Swivel castor with brake + grey rubber tyre Ø160 x W40mm for 180kg Prod ID: 41894

ID 41894: Castor overall height 190 mm | 4 mounting holes with distance 105x80 mm | Wheel with roller bearing and grey rubber tyre with hardness 83 ° shore A | The double brake system, brakes the turning of the wheel and the swivel rotation. | Floor floor

Product information


- Article code 2-932 ISO
- SKU 41894
- EAN 3838461418945

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)



Product description

stainless steel Swivel castor with an overall height of 190 mm

Wheel diameter x width: 160 x 40 mm

Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 93 mm

Wheel with plain bearing and grey rubber tyre with hardness 83 ° shore A on polypropylene.

Approved and tested load capacity

Dynamic 180 kg

Static 220 kg

Temperature range:

Continous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

Advantages of this Floor floor turns Swivel castor:

- ✓ preservation
- ✓ and steam proof
- ✓ obstacle smooth pass

LIV SYSTEMS stainless steel Swivel castor + grey rubber tyre Ø160 x W40mm for 180kg Prod ID: 41924

ID 41924: Castor overall height 190 mm | 4 mounting holes with distance #\$\$ mm | Wheel with plain bearing and grey rubber tyre with hardness 83 ° shore A | Floor floor turns, floor preservation, wet and steam proof, low obstacle smooth pass

Product information


- Article code 2-976 L12
- SKU 41924
- EAN 3838461419249

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)



Product description

stainless steel Swivel castor with an overall height of 190 mm

Wheel diameter x width: 160 x 40 mm

Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 93 mm

Wheel with roller bearing and grey rubber tyre with hardness 83 ° shore A on polypropylene.

Approved and tested load capacity

Dynamic 180 kg

Static 220 kg

Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

Advantages of this Floor floor turns Swivel castor:

- ✓ preservation
- ✓ and steam proof
- ✓ obstacle smooth pass

LIV SYSTEMS stainless steel Swivel castor + grey rubber tyre Ø160 x W40mm for 180kg Prod ID: 41923

ID 41923: Castor overall height 190 mm | 4 mounting holes with distance #\$\$ mm | Wheel with roller bearing and grey rubber tyre with hardness 83 ° shore A | Floor floor turns, floor preservation, wet and steam proof, low obstacle smooth pass

Product information


- Article code 2-969 L12
- SKU 41923
- EAN 3838461419232

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

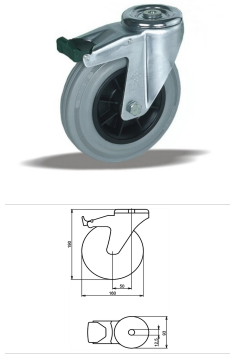

Product description

stainless steel Swivel castor with brake with an overall height of 190 mm
 Wheel diameter x width: 160 x 40 mm
 Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 93 mm
 Wheel with plain bearing and grey rubber tyre with hardness 83 ° shore A on polypropylene
 the double brake system, brakes the turning of the wheel and the swivel rotation.

Approved and tested load capacity

Dynamic 180 kg
 Static 220 kg

Temperature range:

Continious operation: -20 | +70°C
 Short (10 min) exposure: -30 | +80°C

Advantages of this Floor floor turns Swivel castor with brake:

- ✓ preservation
- ✓ and steam proof
- ✓ obstacle smooth pass

LIV SYSTEMS stainless steel Swivel castor with brake + grey rubber tyre Ø160 x W40mm for 180kg Prod ID: 41953

ID 41953: Castor overall height 190 mm | 4 mounting holes with distance #\$\$ mm | Wheel with plain bearing and grey rubber tyre with hardness 83 ° shore A | The double brake system, brakes the turning of the wheel and the swivel rotation. | Floor floor tu

Product information


- Article code 2-990 L12
- SKU 41953
- EAN 3838461419539

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

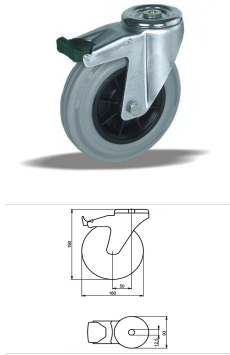

Product description

stainless steel Swivel castor with brake with an overall height of 190 mm
 Wheel diameter x width: 160 x 40 mm
 Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 93 mm
 Wheel with roller bearing and grey rubber tyre with hardness 83 ° shore A on polypropylene
 the double brake system, brakes the turning of the wheel and the swivel rotation.

Approved and tested load capacity

Dynamic 180 kg
 Static 220 kg

Temperature range:

Continious operation: -20 | +70°C
 Short (10 min) exposure: -30 | +80°C

Advantages of this Floor floor turns Swivel castor with brake:

- ✓ preservation
- ✓ and steam proof
- ✓ obstacle smooth pass

LIV SYSTEMS stainless steel Swivel castor with brake + grey rubber tyre Ø160 x W40mm for 180kg Prod ID: 41945

ID 41945: Castor overall height 190 mm | 4 mounting holes with distance #\$\$ mm | Wheel with roller bearing and grey rubber tyre with hardness 83 ° shore A | The double brake system, brakes the turning of the wheel and the swivel rotation. | Floor floor t


Product information

- Article code 2-983 L12
- SKU 41945
- EAN 3838461419454

Specifications

The result of our quality is maximum performance!

[Close](#)
[Close](#)

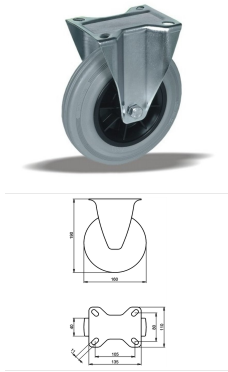

Product description

stainless steel Fixed castor with an overall height of 190 mm

Wheel diameter x width: 160 x 40 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with plain bearing and grey rubber tyre with hardness 83 ° shore A on polypropylene.

Approved and tested load capacity

Dynamic 180 kg

Static 220 kg

Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

Advantages of this Floor floor turns Fixed castor:

- ✓ preservation
- ✓ and steam proof
- ✓ obstacle smooth pass

LIV SYSTEMS stainless steel Fixed castor + grey rubber tyre Ø160 x W40mm for 180kg Prod ID: 41844

ID 41844: Castor overall height 190 mm | 4 mounting holes with distance 105x80 mm | Wheel with plain bearing and grey rubber tyre with hardness 83 ° shore A | Floor floor turns, floor preservation, wet and steam proof, low obstacle smooth pass

Product information


- Article code 2-962 ISO
- SKU 41844
- EAN 3838461418440

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

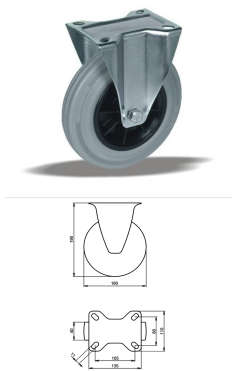

Product description

stainless steel Fixed castor with an overall height of 190 mm

Wheel diameter x width: 160 x 40 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with roller bearing and grey rubber tyre with hardness 83 ° shore A on polypropylene.

Approved and tested load capacity

Dynamic 180 kg

Static 220 kg

Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

Advantages of this Floor floor turns Fixed castor:

- ✓ preservation
- ✓ and steam proof
- ✓ obstacle smooth pass

LIV SYSTEMS stainless steel Fixed castor + grey rubber tyre Ø160 x W40mm for 180kg Prod ID: 41843

ID 41843: Castor overall height 190 mm | 4 mounting holes with distance 105x80 mm | Wheel with roller bearing and grey rubber tyre with hardness 83 ° shore A | Floor floor turns, floor preservation, wet and steam proof, low obstacle smooth pass

Product information

- Article code 2-955 ISO
- SKU 41843
- EAN 3838461418433

Алматы (7273)495-231
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(7172)727-132

Киргизия +996(312)96-26-47

<https://liv.nt-rt.ru/> || vis@nt-rt.ru