

Product description

stainless steel Swivel castor with brake with an overall height of 180 mm
 Wheel diameter x width: 150 x 46 mm
 Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 93 mm
 Wheel with roller bearing and solid polyamide wheel with hardness 70±5 Shore D
 the double brake system, brakes the turning of the wheel and the swivel rotation.

Approved and tested load capacity

Dynamic 300 kg
 Static 370 kg

Temperature range:

Continious operation: -25 | +80°C
 Short (10 min) exposure: -30 | +110°C

Advantages of this Steamy floor in Swivel castor with brake:

- ✓ washing allowed
- ✓ shining
- ✓ hot and wet conditions

LIV SYSTEMS stainless steel Swivel castor with brake + solid polyamide wheel Ø150 x W46mm for 300kg Prod ID: 41685

ID 41685: Castor overall height 180 mm | 4 mounting holes with distance #\$\$ mm | Wheel with roller bearing and solid polyamide wheel with hardness 70±5 Shore D | The double brake system, brakes the turning of the wheel and the swivel rotation. | Steamy f

Product information

- Article code 2-791 L12
- SKU 41685
- EAN 3838461416859

Алматы (7273)495-231
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижегород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35


Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(7172)727-132

Киргизия +996(312)96-26-47

<https://liv.nt-rt.ru/> || vis@nt-rt.ru

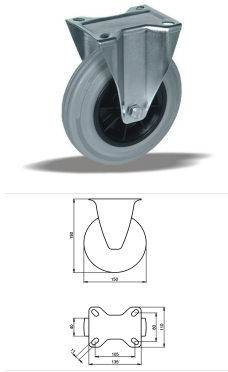

Product description

stainless steel Fixed castor with an overall height of 180 mm

Wheel diameter x width: 150 x 40 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with plain bearing and grey rubber tyre with hardness 83 ° shore A on polypropylene.

Approved and tested load capacity

Dynamic 170 kg

Static 210 kg

Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

Advantages of this Floor floor turns Fixed castor:

- ✓ preservation
- ✓ and steam proof
- ✓ obstacle smooth pass

LIV SYSTEMS stainless steel Fixed castor + grey rubber tyre Ø150 x W40mm for 170kg Prod ID: 41835

ID 41835: Castor overall height 180 mm | 4 mounting holes with distance 105x80 mm | Wheel with plain bearing and grey rubber tyre with hardness 83 ° shore A | Floor floor turns, floor preservation, wet and steam proof, low obstacle smooth pass

Product information


- Article code 2-961 ISO
- SKU 41835
- EAN 3838461418358

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

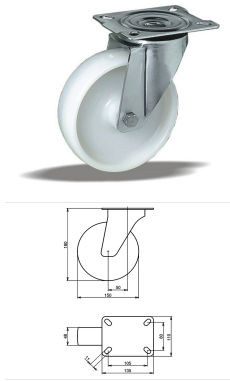

Product description

stainless steel Swivel castor with an overall height of 180 mm

Wheel diameter x width: 150 x 46 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with plain bearing and solid polyamide wheel with hardness 70±5 Shore D.

Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

Temperature range:

Continuous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

Advantages of this Steamy floor in Swivel castor:

- ✓ washing allowed
- ✓ shining
- ✓ hot and wet conditions

LIV SYSTEMS stainless steel Swivel castor + solid polyamide wheel Ø150 x W46mm for 300kg Prod ID: 41653

ID 41653: Castor overall height 180 mm | 4 mounting holes with distance 105x80 mm | Wheel with plain bearing and solid polyamide wheel with hardness 70±5 Shore D | Steamy floor in, frequent washing allowed, always shining, for hot and wet conditions

Product information


- Article code 2-673 ISO
- SKU 41653
- EAN 3838461416538

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

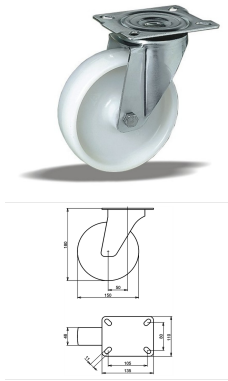

Product description

stainless steel Swivel castor with an overall height of 180 mm

Wheel diameter x width: 150 x 46 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with roller bearing and solid polyamide wheel with hardness 70±5 Shore D.

Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

Temperature range:

Continuous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

Advantages of this Steamy floor in Swivel castor:

✓ washing allowed

✓ shining

✓ hot and wet conditions

LIV SYSTEMS stainless steel Swivel castor + solid polyamide wheel Ø150 x W46mm for 300kg Prod ID: 41645

ID 41645: Castor overall height 180 mm | 4 mounting holes with distance 105x80 mm | Wheel with roller bearing and solid polyamide wheel with hardness 70±5 Shore D | Steamy floor in, frequent washing allowed, always shining, for hot and wet conditions

Product information


- Article code 2-663 ISO
- SKU 41645
- EAN 3838461416453

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

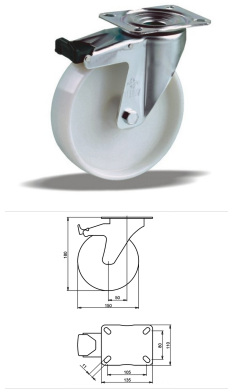

Product description

stainless steel Swivel castor with brake with an overall height of 180 mm

Wheel diameter x width: 150 x 46 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with plain bearing and solid polyamide wheel with hardness 70±5 Shore D

the double brake system, brakes the turning of the wheel and the swivel rotation.

Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

Temperature range:

Continuous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

Advantages of this Steamy floor in Swivel castor with brake:

- ✓ washing allowed
- ✓ shining
- ✓ hot and wet conditions

LIV SYSTEMS stainless steel Swivel castor with brake + solid polyamide wheel Ø150 x W46mm for 300kg Prod ID: 41664

ID 41664: Castor overall height 180 mm | 4 mounting holes with distance 105x80 mm | Wheel with plain bearing and solid polyamide wheel with hardness 70±5 Shore D |

The double brake system, brakes the turning of the wheel and the swivel rotation. | Steamy

Product information


- Article code 2-685 A
- SKU 41664
- EAN 3838461416644

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

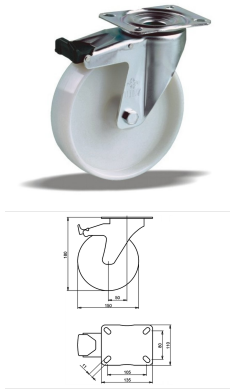

Product description

stainless steel Swivel castor with brake with an overall height of 180 mm

Wheel diameter x width: 150 x 46 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with roller bearing and solid polyamide wheel with hardness 70±5 Shore D

the double brake system, brakes the turning of the wheel and the swivel rotation.

Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

Temperature range:

Continuous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

Advantages of this Steamy floor in Swivel castor with brake:

- ✓ washing allowed
- ✓ shining
- ✓ hot and wet conditions

LIV SYSTEMS stainless steel Swivel castor with brake + solid polyamide wheel Ø150 x W46mm for 300kg Prod ID: 41663

ID 41663: Castor overall height 180 mm | 4 mounting holes with distance 105x80 mm | Wheel with roller bearing and solid polyamide wheel with hardness 70±5 Shore D | The double brake system, brakes the turning of the wheel and the swivel rotation. | Steam

Product information


- Article code 2-724 A
- SKU 41663
- EAN 3838461416637

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

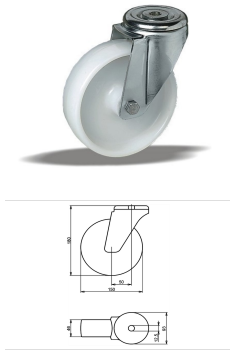

Product description

stainless steel Swivel castor with an overall height of 180 mm

Wheel diameter x width: 150 x 46 mm

Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 93 mm

Wheel with plain bearing and solid polyamide wheel with hardness 70±5 Shore D.

Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

Temperature range:

Continuous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

Advantages of this Steamy floor in Swivel castor:

✓ washing allowed

✓ shining

✓ hot and wet conditions

LIV SYSTEMS stainless steel Swivel castor + solid polyamide wheel Ø150 x W46mm for 300kg Prod ID: 41675

ID 41675: Castor overall height 180 mm | 4 mounting holes with distance #\$\$ mm | Wheel with plain bearing and solid polyamide wheel with hardness 70±5 Shore D |

Steamy floor in, frequent washing allowed, always shining, for hot and wet conditions

Product information


- Article code 2-768 L12
- SKU 41675
- EAN 3838461416750

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

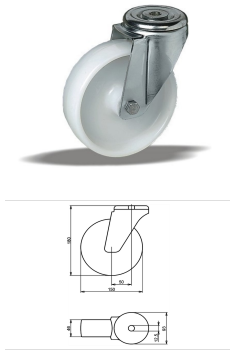

Product description

stainless steel Swivel castor with an overall height of 180 mm

Wheel diameter x width: 150 x 46 mm

Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 93 mm

Wheel with roller bearing and solid polyamide wheel with hardness 70±5 Shore D.

Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

Temperature range:

Continuous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

Advantages of this Steamy floor in Swivel castor:

✓ washing allowed

✓ shining

✓ hot and wet conditions

LIV SYSTEMS stainless steel Swivel castor + solid polyamide wheel Ø150 x W46mm for 300kg Prod ID: 41674

ID 41674: Castor overall height 180 mm | 4 mounting holes with distance #\$\$ mm | Wheel with roller bearing and solid polyamide wheel with hardness 70±5 Shore D | Steamy floor in, frequent washing allowed, always shining, for hot and wet conditions

Product information


- Article code 2-758 L12
- SKU 41674
- EAN 3838461416743

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

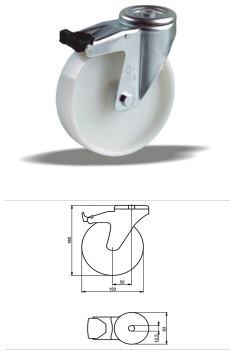

Product description

stainless steel Swivel castor with brake with an overall height of 180 mm
 Wheel diameter x width: 150 x 46 mm
 Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 93 mm
 Wheel with plain bearing and solid polyamide wheel with hardness 70±5 Shore D
 the double brake system, brakes the turning of the wheel and the swivel rotation.

Approved and tested load capacity

Dynamic 300 kg
 Static 370 kg

Temperature range:

Continious operation: -25 | +80°C
 Short (10 min) exposure: -30 | +110°C

Advantages of this Steamy floor in Swivel castor with brake:

- ✓ washing allowed
- ✓ shining
- ✓ hot and wet conditions

LIV SYSTEMS stainless steel Swivel castor with brake + solid polyamide wheel Ø150 x W46mm for 300kg Prod ID: 41693

ID 41693: Castor overall height 180 mm | 4 mounting holes with distance #\$\$ mm | Wheel with plain bearing and solid polyamide wheel with hardness 70±5 Shore D | The double brake system, brakes the turning of the wheel and the swivel rotation. | Steamy fl

Product information


- Article code 2-796 L12
- SKU 41693
- EAN 3838461416934

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

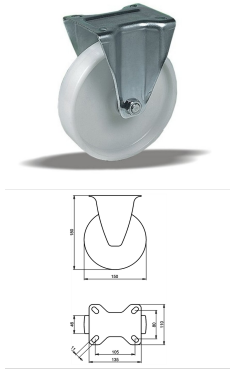

Product description

stainless steel Fixed castor with an overall height of 180 mm

Wheel diameter x width: 150 x 46 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with plain bearing and solid polyamide wheel with hardness 70±5 Shore D.

Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

Temperature range:

Continuous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

Advantages of this Steamy floor in Fixed castor:

- ✓ washing allowed
- ✓ shining
- ✓ hot and wet conditions

LIV SYSTEMS stainless steel Fixed castor + solid polyamide wheel Ø150 x W46mm for 300kg Prod ID: 41634

ID 41634: Castor overall height 180 mm | 4 mounting holes with distance 105x80 mm | Wheel with plain bearing and solid polyamide wheel with hardness 70±5 Shore D | Steamy floor in, frequent washing allowed, always shining, for hot and wet conditions

Product information


- Article code 2-668 A
- SKU 41634
- EAN 3838461416347

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

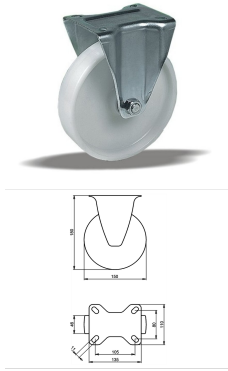

Product description

stainless steel Fixed castor with an overall height of 180 mm

Wheel diameter x width: 150 x 46 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with plain bearing and solid polyamide wheel with hardness 70±5 Shore D.

Approved and tested load capacity

Dynamic 300 kg

Static 370 kg

Temperature range:

Continuous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

Advantages of this Steamy floor in Fixed castor:

✓ washing allowed

✓ shining

✓ hot and wet conditions

LIV SYSTEMS stainless steel Fixed castor + solid polyamide wheel Ø150 x W46mm for 300kg Prod ID: 41635

ID 41635: Castor overall height 180 mm | 4 mounting holes with distance 105x80 mm | Wheel with plain bearing and solid polyamide wheel with hardness 70±5 Shore D | Steamy floor in, frequent washing allowed, always shining, for hot and wet conditions

Product information


- Article code 2-678 A
- SKU 41635
- EAN 3838461416354

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

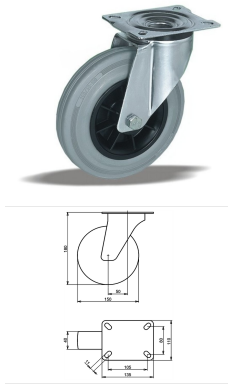

Product description

stainless steel Swivel castor with an overall height of 180 mm

Wheel diameter x width: 150 x 40 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with plain bearing and grey rubber tyre with hardness 83 ° shore A on polypropylene.

Approved and tested load capacity

Dynamic 170 kg

Static 210 kg

Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

Advantages of this Floor floor turns Swivel castor:

- ✓ preservation
- ✓ and steam proof
- ✓ obstacle smooth pass

LIV SYSTEMS stainless steel Swivel castor + grey rubber tyre Ø150 x W40mm for 170kg Prod ID: 41864

ID 41864: Castor overall height 180 mm | 4 mounting holes with distance 105x80 mm | Wheel with plain bearing and grey rubber tyre with hardness 83 ° shore A | Floor floor turns, floor preservation, wet and steam proof, low obstacle smooth pass

Product information


- Article code 2-924 ISO
- SKU 41864
- EAN 3838461418648

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

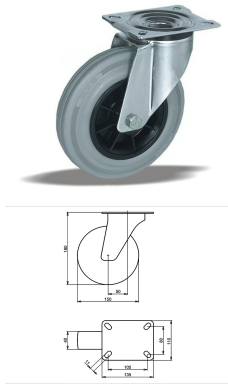

Product description

stainless steel Swivel castor with an overall height of 180 mm

Wheel diameter x width: 150 x 40 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with roller bearing and grey rubber tyre with hardness 83 ° shore A on polypropylene.

Approved and tested load capacity

Dynamic 170 kg

Static 210 kg

Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

Advantages of this Floor floor turns Swivel castor:

- ✓ preservation
- ✓ and steam proof
- ✓ obstacle smooth pass

LIV SYSTEMS stainless steel Swivel castor + grey rubber tyre Ø150 x W40mm for 170kg Prod ID: 41863

ID 41863: Castor overall height 180 mm | 4 mounting holes with distance 105x80 mm | Wheel with roller bearing and grey rubber tyre with hardness 83 ° shore A | Floor floor turns, floor preservation, wet and steam proof, low obstacle smooth pass

Product information


- Article code 2-917 ISO
- SKU 41863
- EAN 3838461418631

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

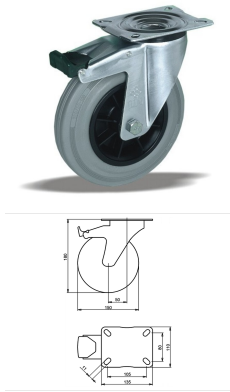

Product description

stainless steel Swivel castor with brake with an overall height of 180 mm

Wheel diameter x width: 150 x 40 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with plain bearing and grey rubber tyre with hardness 83 ° shore A on polypropylene

the double brake system, brakes the turning of the wheel and the swivel rotation.

Approved and tested load capacity

Dynamic 170 kg

Static 210 kg

Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

Advantages of this Floor floor turns Swivel castor with brake:

- ✓ preservation
- ✓ and steam proof
- ✓ obstacle smooth pass

LIV SYSTEMS stainless steel Swivel castor with brake + grey rubber tyre Ø150 x W40mm for 170kg Prod ID: 41893

ID 41893: Castor overall height 180 mm | 4 mounting holes with distance 105x80 mm | Wheel with plain bearing and grey rubber tyre with hardness 83 ° shore A | The double brake system, brakes the turning of the wheel and the swivel rotation. | Floor floor

Product information


- Article code 2-938 ISO
- SKU 41893
- EAN 3838461418938

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

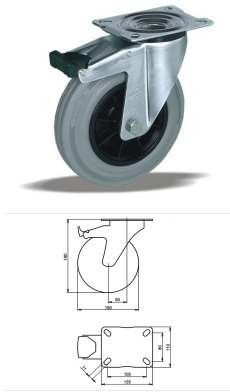

Product description

stainless steel Swivel castor with brake with an overall height of 180 mm

Wheel diameter x width: 150 x 40 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with roller bearing and grey rubber tyre with hardness 83 ° shore A on polypropylene

the double brake system, brakes the turning of the wheel and the swivel rotation.

Approved and tested load capacity

Dynamic 170 kg

Static 210 kg

Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

Advantages of this Floor floor turns Swivel castor with brake:

- ✓ preservation
- ✓ and steam proof
- ✓ obstacle smooth pass

LIV SYSTEMS stainless steel Swivel castor with brake + grey rubber tyre Ø150 x W40mm for 170kg Prod ID: 41885

ID 41885: Castor overall height 180 mm | 4 mounting holes with distance 105x80 mm | Wheel with roller bearing and grey rubber tyre with hardness 83 ° shore A | The double brake system, brakes the turning of the wheel and the swivel rotation. | Floor floo

Product information


- Article code 2-931 ISO
- SKU 41885
- EAN 3838461418853

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)



Product description

stainless steel Swivel castor with an overall height of 180 mm

Wheel diameter x width: 150 x 40 mm

Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 93 mm

Wheel with plain bearing and grey rubber tyre with hardness 83 ° shore A on polypropylene.

Approved and tested load capacity

Dynamic 170 kg

Static 210 kg

Temperature range:

Continious operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

Advantages of this Floor floor turns Swivel castor:

- ✓ preservation
- ✓ and steam proof
- ✓ obstacle smooth pass

LIV SYSTEMS stainless steel Swivel castor + grey rubber tyre Ø150 x W40mm for 170kg Prod ID: 41915

ID 41915: Castor overall height 180 mm | 4 mounting holes with distance #\$\$ mm | Wheel with plain bearing and grey rubber tyre with hardness 83 ° shore A | Floor floor turns, floor preservation, wet and steam proof, low obstacle smooth pass

Product information


- Article code 2-975 L12
- SKU 41915
- EAN 3838461419157

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)



Product description

stainless steel Swivel castor with an overall height of 180 mm

Wheel diameter x width: 150 x 40 mm

Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 93 mm

Wheel with roller bearing and grey rubber tyre with hardness 83 ° shore A on polypropylene.

Approved and tested load capacity

Dynamic 170 kg

Static 210 kg

Temperature range:

Continous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

Advantages of this Floor floor turns Swivel castor:

- ✓ preservation
- ✓ and steam proof
- ✓ obstacle smooth pass

LIV SYSTEMS stainless steel Swivel castor + grey rubber tyre Ø150 x W40mm for 170kg Prod ID: 41914

ID 41914: Castor overall height 180 mm | 4 mounting holes with distance #\$\$ mm | Wheel with roller bearing and grey rubber tyre with hardness 83 ° shore A | Floor floor turns, floor preservation, wet and steam proof, low obstacle smooth pass

Product information


- Article code 2-968 L12
- SKU 41914
- EAN 3838461419140

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

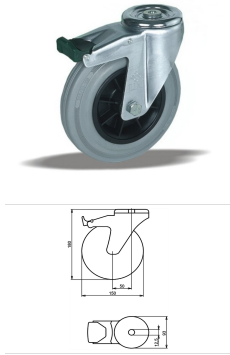

Product description

stainless steel Swivel castor with brake with an overall height of 180 mm
 Wheel diameter x width: 150 x 40 mm
 Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 93 mm
 Wheel with plain bearing and grey rubber tyre with hardness 83 ° shore A on polypropylene
 the double brake system, brakes the turning of the wheel and the swivel rotation.

Approved and tested load capacity

Dynamic 170 kg
 Static 210 kg

Temperature range:

Continious operation: -20 | +70°C
 Short (10 min) exposure: -30 | +80°C

Advantages of this Floor floor turns Swivel castor with brake:

- ✓ preservation
- ✓ and steam proof
- ✓ obstacle smooth pass

LIV SYSTEMS stainless steel Swivel castor with brake + grey rubber tyre Ø150 x W40mm for 170kg Prod ID: 41944

ID 41944: Castor overall height 180 mm | 4 mounting holes with distance #\$\$ mm | Wheel with plain bearing and grey rubber tyre with hardness 83 ° shore A | The double brake system, brakes the turning of the wheel and the swivel rotation. | Floor floor tu

Product information


- Article code 2-989 L12
- SKU 41944
- EAN 3838461419447

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

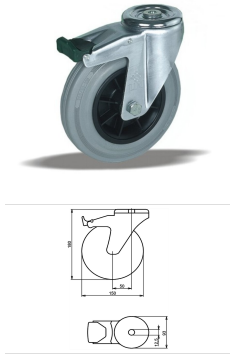

Product description

stainless steel Swivel castor with brake with an overall height of 180 mm
 Wheel diameter x width: 150 x 40 mm
 Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 93 mm
 Wheel with roller bearing and grey rubber tyre with hardness 83 ° shore A on polypropylene
 the double brake system, brakes the turning of the wheel and the swivel rotation.

Approved and tested load capacity

Dynamic 170 kg
 Static 210 kg

Temperature range:

Continious operation: -20 | +70°C
 Short (10 min) exposure: -30 | +80°C

Advantages of this Floor floor turns Swivel castor with brake:

- ✓ preservation
- ✓ and steam proof
- ✓ obstacle smooth pass

LIV SYSTEMS stainless steel Swivel castor with brake + grey rubber tyre Ø150 x W40mm for 170kg Prod ID: 41943

ID 41943: Castor overall height 180 mm | 4 mounting holes with distance #\$\$ mm | Wheel with roller bearing and grey rubber tyre with hardness 83 ° shore A | The double brake system, brakes the turning of the wheel and the swivel rotation. | Floor floor t


Product information

- Article code 2-982 L12
- SKU 41943
- EAN 3838461419430

Specifications

The result of our quality is maximum performance!

[Close](#)
[Close](#)

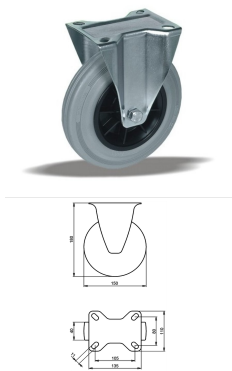

Product description

stainless steel Fixed castor with an overall height of 180 mm

Wheel diameter x width: 150 x 40 mm

Top plate with 4 mounting holes of 11 mm, mounting hole distance 105x80 mm and top plate outer dimensions: 135x110 mm

Wheel with roller bearing and grey rubber tyre with hardness 83 ° shore A on polypropylene.

Approved and tested load capacity

Dynamic 130 kg

Static 160 kg

Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

Advantages of this Floor floor turns Fixed castor:

- ✓ preservation
- ✓ and steam proof
- ✓ obstacle smooth pass

LIV SYSTEMS stainless steel Fixed castor + grey rubber tyre Ø150 x W40mm for 130kg Prod ID: 41834

ID 41834: Castor overall height 180 mm | 4 mounting holes with distance 105x80 mm | Wheel with roller bearing and grey rubber tyre with hardness 83 ° shore A | Floor floor turns, floor preservation, wet and steam proof, low obstacle smooth pass

Product information

- Article code 2-954 ISO
- SKU 41834
- EAN 3838461418341

Алматы (7273)495-231
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(7172)727-132

Киргизия +996(312)96-26-47

<https://liv.nt-rt.ru/> || vis@nt-rt.ru