



## Product description

stainless steel Swivel castor with an overall height of 155 mm

Wheel diameter x width: 125 x 35 mm

Top plate with 4 mounting holes of 9 mm, mounting hole distance 80x60 mm and top plate outer dimensions: 105x85 mm

Wheel with ball bearing and elastic rubber tyre with hardness 70 ° Shore A on polyamide.

### Approved and tested load capacity

Dynamic 200 kg

Static 250 kg

### Temperature range:

Continuous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

### Advantages of this Tile floor ride Swivel castor:

- ✓ absorbing
- ✓ ride over obstacles
- ✓ to keep clean

## LIV SYSTEMS stainless steel Swivel castor + elastic rubber tyre Ø125 x W35mm for 200kg Prod ID: 42235

ID 42235: Castor overall height 155 mm | 4 mounting holes with distance 80x60 mm | Wheel with ball bearing and elastic rubber tyre with hardness 70 ° Shore A | Tile floor ride, shock absorbing, smooth ride over obstacles, easy to keep clean

## Product information

- Article code 2-042-25K
- SKU 42235
- EAN 3838461422355

**Алматы** (7273)495-231  
**Ангарск** (3955)60-70-56  
**Архангельск** (8182)63-90-72  
**Астрахань** (8512)99-46-04  
**Барнаул** (3852)73-04-60  
**Белгород** (4722)40-23-64  
**Благовещенск** (4162)22-76-07  
**Брянск** (4832)59-03-52  
**Владивосток** (423)249-28-31  
**Владикавказ** (8672)28-90-48  
**Владимир** (4922)49-43-18  
**Волгоград** (844)278-03-48  
**Вологда** (8172)26-41-59  
**Воронеж** (473)204-51-73  
**Екатеринбург** (343)384-55-89

**Иваново** (4932)77-34-06  
**Ижевск** (3412)26-03-58  
**Иркутск** (395)279-98-46  
**Казань** (843)206-01-48  
**Калининград** (4012)72-03-81  
**Калуга** (4842)92-23-67  
**Кемерово** (3842)65-04-62  
**Киров** (8332)68-02-04  
**Коломна** (4966)23-41-49  
**Кострома** (4942)77-07-48  
**Краснодар** (861)203-40-90  
**Красноярск** (391)204-63-61  
**Курск** (4712)77-13-04  
**Курган** (3522)50-90-47  
**Липецк** (4742)52-20-81

**Магнитогорск** (3519)55-03-13  
**Москва** (495)268-04-70  
**Мурманск** (8152)59-64-93  
**Набережные Челны** (8552)20-53-41  
**Нижний Новгород** (831)429-08-12  
**Новокузнецк** (3843)20-46-81  
**Ноябрьск** (3496)41-32-12  
**Новосибирск** (383)227-86-73  
**Омск** (3812)21-46-40  
**Орел** (4862)44-53-42  
**Оренбург** (3532)37-68-04  
**Пенза** (8412)22-31-16  
**Петрозаводск** (8142)55-98-37  
**Псков** (8112)59-10-37  
**Пермь** (342)205-81-47

**Ростов-на-Дону** (863)308-18-15  
**Рязань** (4912)46-61-64  
**Самара** (846)206-03-16  
**Санкт-Петербург** (812)309-46-40  
**Саратов** (845)249-38-78  
**Севастополь** (8692)22-31-93  
**Саранск** (8342)22-96-24  
**Симферополь** (3652)67-13-56  
**Смоленск** (4812)29-41-54  
**Сочи** (862)225-72-31  
**Ставрополь** (8652)20-65-13  
**Сургут** (3462)77-98-35  
**Сыктывкар** (8212)25-95-17  
**Тамбов** (4752)50-40-97  
**Тверь** (4822)63-31-35

**Тольятти** (8482)63-91-07  
**Томск** (3822)98-41-53  
**Тула** (4872)33-79-87  
**Тюмень** (3452)66-21-18  
**Ульяновск** (8422)24-23-59  
**Улан-Удэ** (3012)59-97-51  
**Уфа** (347)229-48-12  
**Хабаровск** (4212)92-98-04  
**Чебоксары** (8352)28-53-07  
**Челябинск** (351)202-03-61  
**Череповец** (8202)49-02-64  
**Чита** (3022)38-34-83  
**Якутск** (4112)23-90-97  
**Ярославль** (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(7172)727-132

Киргизия +996(312)96-26-47

<https://liv.nt-rt.ru/> || [vis@nt-rt.ru](mailto:vis@nt-rt.ru)



## Product description

stainless steel Wheel with ball bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A on polyamide

Wheel diameter x width: 125 x 32 mm

Axle hole: 12 mm

Hub length: 44 mm

### Approved and tested load capacity

Dynamic 200 kg

Static 250 kg

### Temperature range:

Continuous operation: -25 | +55°C

Short (10 min) exposure: -30 | +55°C

### Advantages of this No trail highway drive wheel:


- ✓ deform if stationed
- ✓ range of temperatures
- ✓ resistant

## LIV SYSTEMS stainless steel wheel + injection-moulded polyurethane tread Ø125 x W32mm for 200kg Prod ID: 42143

ID 42143: stainless steel Wheel with ball bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A on polyamide | Axle hole: 12 mm | Hub length: 44 mm | No trail highway drive, low deform if stationed, wide range of temperatures, oil res

## Product information

- Article code 2-050-25K
- SKU 42143
- EAN 3838461421433

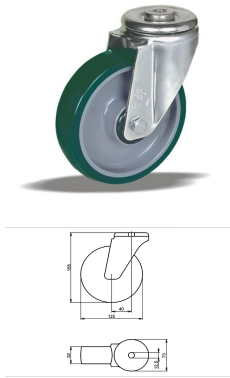

## Product description

stainless steel Swivel castor with an overall height of 155 mm

Wheel diameter x width: 125 x 32 mm

Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 73 mm

Wheel with roller bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A on polyamide.

### Approved and tested load capacity

Dynamic 200 kg

Static 250 kg

### Temperature range:

Continuous operation: -25 | +55°C

Short (10 min) exposure: -30 | +55°C

### Advantages of this No trail highway drive Swivel castor:

- ✓ deformation if rarely moved
- ✓ range of temperatures
- ✓ resistant

## LIV SYSTEMS stainless steel Swivel castor + injection-moulded polyurethane tread Ø125 x W32mm for 200kg Prod ID: 41395

ID 41395: Castor overall height 155 mm | 4 mounting holes with distance #\$\$ mm | Wheel with roller bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A | No trail highway drive, low deformation if rarely moved, wide range of tempera

## Product information


- Article code 2-054-25V
- SKU 41395
- EAN 3838461413957

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

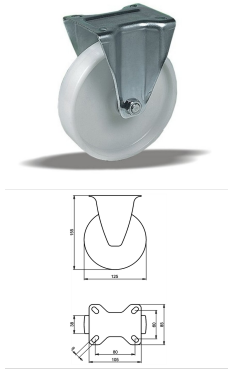

## Product description

stainless steel Fixed castor with an overall height of 155 mm

Wheel diameter x width: 125 x 38 mm

Top plate with 4 mounting holes of 9 mm, mounting hole distance 80x60 mm and top plate outer dimensions: 105x85 mm

Wheel with plain bearing and solid polyamide wheel with hardness 70±5 Shore D.

### Approved and tested load capacity

Dynamic 250 kg

Static 310 kg

### Temperature range:

Continuous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

### Advantages of this Steamy floor in Fixed castor:

- ✓ washing allowed
- ✓ shining
- ✓ hot and wet conditions

## LIV SYSTEMS stainless steel Fixed castor + solid polyamide wheel Ø125 x W38mm for 250kg Prod ID: 41265

ID 41265: Castor overall height 155 mm | 4 mounting holes with distance 80x60 mm | Wheel with plain bearing and solid polyamide wheel with hardness 70±5 Shore D | Steamy floor in, frequent washing allowed, always shining, for hot and wet conditions

## Product information

- Article code 2-677 ISO
- SKU 41265
- EAN 3838461412653

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)



## Product description

stainless steel Wheel with ball bearing and elastic rubber tyre with hardness 70 ° Shore A on polyamide

Wheel diameter x width: 125 x 35 mm

Axle hole: 12 mm

Hub length: 44 mm

### Approved and tested load capacity

Dynamic 200 kg

Static 250 kg

### Temperature range:

Continuous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

### Advantages of this Tile floor ride wheel:

- ✓ absorbing
- ✓ ride over obstacles
- ✓ to keep clean

## LIV SYSTEMS stainless steel wheel + elastic rubber tyre Ø125 x W35mm for 200kg Prod ID: 42153

ID 42153:stainless steel Wheel with ball bearing and elastic rubber tyre with hardness 70 ° Shore A on polyamide |

Axle hole: 12 mm | Hub length: 44 mm | Tile floor ride, shock absorbing, smooth ride over obstacles, easy to keep clean

## Product information

- Article code 2-040-25K
- SKU 42153
- EAN 3838461421532



## Product description

stainless steel Wheel with roller bearing and elastic rubber tyre with hardness 70 ° Shore A on polyamide

Wheel diameter x width: 125 x 35 mm

Axle hole: 12 mm

Hub length: 44 mm

### Approved and tested load capacity

Dynamic 200 kg

Static 250 kg

### Temperature range:

Continuous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

### Advantages of this Tile floor ride wheel:

- ✓ absorbing
- ✓ ride over obstacles
- ✓ to keep clean


## LIV SYSTEMS stainless steel wheel + elastic rubber tyre Ø125 x W35mm for 200kg Prod ID: 42315

ID 42315:stainless steel Wheel with roller bearing and elastic rubber tyre with hardness 70 ° Shore A on polyamide |

Axle hole: 12 mm | Hub length: 44 mm | Tile floor ride, shock absorbing, smooth ride over obstacles, easy to keep clean

## Product information

- Article code 2-040-25V
- SKU 42315
- EAN 3838461423154

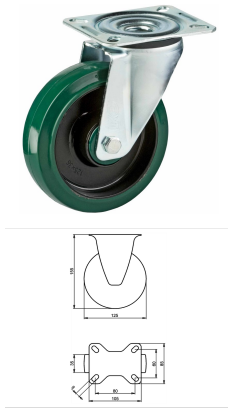

## Product description

stainless steel Swivel castor with an overall height of 155 mm

Wheel diameter x width: 125 x 35 mm

Top plate with 4 mounting holes of 9 mm, mounting hole distance 80x60 mm and top plate outer dimensions: 105x85 mm

Wheel with plain bearing and elastic rubber tyre with hardness 70 ° Shore A on polyamide.

### Approved and tested load capacity

Dynamic 200 kg

Static 250 kg

### Temperature range:

Continuous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

### Advantages of this Tile floor ride Swivel castor:

- ✓ absorbing
- ✓ ride over obstacles
- ✓ to keep clean

## LIV SYSTEMS stainless steel Swivel castor + elastic rubber tyre Ø125 x W35mm for 200kg Prod ID: 41593

ID 41593: Castor overall height 155 mm | 4 mounting holes with distance 80x60 mm | Wheel with plain bearing and elastic rubber tyre with hardness 70 ° Shore A | Tile floor ride, shock absorbing, smooth ride over obstacles, easy to keep clean

## Product information

- Article code 2-042-25D
- SKU 41593
- EAN 3838461415937

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)



## Product description

stainless steel Swivel castor with brake with an overall height of 155 mm

Wheel diameter x width: 125 x 35 mm

Top plate with 4 mounting holes of 9 mm, mounting hole distance 80x60 mm and top plate outer dimensions: 105x85 mm

Wheel with plain bearing and elastic rubber tyre with hardness 70 ° Shore A on polyamide

the double brake system, brakes the turning of the wheel and the swivel rotation.

### Approved and tested load capacity

Dynamic 200 kg

Static 250 kg

### Temperature range:

Continuous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

### Advantages of this Tile floor ride Swivel castor with brake:

- ✓ absorbing
- ✓ ride over obstacles
- ✓ to keep clean

## LIV SYSTEMS stainless steel Swivel castor with brake + elastic rubber tyre Ø125 x W35mm for 200kg Prod ID: 41604

ID 41604: Castor overall height 155 mm | 4 mounting holes with distance 80x60 mm | Wheel with plain bearing and elastic rubber tyre with hardness 70 ° Shore A | The double brake system, brakes the turning of the wheel and the swivel rotation. | Tile floor

## Product information

- Article code 2-043-25D
- SKU 41604
- EAN 3838461416040

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)





## Product description

stainless steel Swivel castor with brake with an overall height of 155 mm

Wheel diameter x width: 125 x 35 mm

Top plate with 4 mounting holes of 9 mm, mounting hole distance 80x60 mm and top plate outer dimensions: 105x85 mm

Wheel with ball bearing and elastic rubber tyre with hardness 70 ° Shore A on polyamide  
the double brake system, brakes the turning of the wheel and the swivel rotation.

### Approved and tested load capacity

Dynamic 150 kg

Static 180 kg

### Temperature range:

Continuous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

### Advantages of this Tile floor ride Swivel castor with brake:

- ✓ absorbing
- ✓ ride over obstacles
- ✓ to keep clean

## LIV SYSTEMS stainless steel Swivel castor with brake + elastic rubber tyre Ø125 x W35mm for 150kg Prod ID: 42253

ID 42253: Castor overall height 155 mm | 4 mounting holes with distance 80x60 mm | Wheel with ball bearing and elastic rubber tyre with hardness 70 ° Shore A | The double brake system, brakes the turning of the wheel and the swivel rotation. | Tile floor

## Product information


- Article code 2-043-25K
- SKU 42253
- EAN 3838461422539

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)



## Product description

stainless steel Swivel castor with an overall height of 155 mm

Wheel diameter x width: 125 x 35 mm

Top plate with 4 mounting holes of 12,5 mm, mounting hole distance 70 mm and top plate outer dimensions: 70 mm

Wheel with plain bearing and elastic rubber tyre with hardness 70 ° Shore A on polyamide.

### Approved and tested load capacity

Dynamic 200 kg

Static 250 kg

### Temperature range:

Continuous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

### Advantages of this Tile floor ride Swivel castor:

- ✓ absorbing
- ✓ ride over obstacles
- ✓ to keep clean

## LIV SYSTEMS stainless steel Swivel castor + elastic rubber tyre Ø125 x W35mm for 200kg Prod ID: 41615

ID 41615: Castor overall height 155 mm | 4 mounting holes with distance 70 mm | Wheel with plain bearing and elastic rubber tyre with hardness 70 ° Shore A | Tile floor ride, shock absorbing, smooth ride over obstacles, easy to keep clean

## Product information


- Article code 2-044-25D
- SKU 41615
- EAN 3838461416156

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)



## Product description

stainless steel Swivel castor with an overall height of 155 mm

Wheel diameter x width: 125 x 35 mm

Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 70 mm

Wheel with ball bearing and elastic rubber tyre with hardness 70 ° Shore A on polyamide.

### Approved and tested load capacity

Dynamic 200 kg

Static 250 kg

### Temperature range:

Continous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

### Advantages of this Tile floor ride Swivel castor:

- ✓ absorbing
- ✓ ride over obstacles
- ✓ to keep clean

## LIV SYSTEMS stainless steel Swivel castor + elastic rubber tyre Ø125 x W35mm for 200kg Prod ID: 42264

ID 42264: Castor overall height 155 mm | 4 mounting holes with distance #\$\$ mm | Wheel with ball bearing and elastic rubber tyre with hardness 70 ° Shore A | Tile floor ride, shock absorbing, smooth ride over obstacles, easy to keep clean

## Product information

- Article code 2-044-25K
- SKU 42264
- EAN 3838461422645

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)



## Product description

stainless steel Swivel castor with brake with an overall height of 155 mm

Wheel diameter x width: 125 x 35 mm

Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 70 mm

Wheel with ball bearing and elastic rubber tyre with hardness 70 ° Shore A on polyamide

the double brake system, brakes the turning of the wheel and the swivel rotation.

### Approved and tested load capacity

Dynamic 200 kg

Static 250 kg

### Temperature range:

Continuous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

### Advantages of this Tile floor ride Swivel castor with brake:

- ✓ absorbing
- ✓ ride over obstacles
- ✓ to keep clean

## LIV SYSTEMS stainless steel Swivel castor with brake + elastic rubber tyre Ø125 x W35mm for 200kg Prod ID:

### 42275

ID 42275: Castor overall height 155 mm | 4 mounting holes with distance #\$\$ mm | Wheel with ball bearing and elastic rubber tyre with hardness 70 ° Shore A | The double brake system, brakes the turning of the wheel and the swivel rotation. | Tile floor ri

## Product information


- Article code 2-045-25K
- SKU 42275
- EAN 3838461422751

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)



## Product description

stainless steel Fixed castor with an overall height of 155 mm

Wheel diameter x width: 125 x 35 mm

Top plate with 4 mounting holes of 9 mm, mounting hole distance 80x60 mm and top plate outer dimensions: 105x85 mm

Wheel with plain bearing and elastic rubber tyre with hardness 70 ° Shore A on polyamide.

### Approved and tested load capacity

Dynamic 200 kg

Static 250 kg

### Temperature range:

Continuous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

### Advantages of this Tile floor ride Fixed castor:

- ✓ absorbing
- ✓ ride over obstacles
- ✓ to keep clean

## LIV SYSTEMS stainless steel Fixed castor + elastic rubber tyre Ø125 x W35mm for 200kg Prod ID: 41575

ID 41575: Castor overall height 155 mm | 4 mounting holes with distance 80x60 mm | Wheel with plain bearing and elastic rubber tyre with hardness 70 ° Shore A | Tile floor ride, shock absorbing, smooth ride over obstacles, easy to keep clean

## Product information


- Article code 2-041-25D
- SKU 41575
- EAN 3838461415753

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)



## Product description

stainless steel Fixed castor with an overall height of 155 mm

Wheel diameter x width: 125 x 35 mm

Top plate with 4 mounting holes of 9 mm, mounting hole distance 80x60 mm and top plate outer dimensions: 105x85 mm

Wheel with ball bearing and elastic rubber tyre with hardness 70 ° Shore A on polyamide.

### Approved and tested load capacity

Dynamic 200 kg

Static 250 kg

### Temperature range:

Continuous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

### Advantages of this Tile floor ride Fixed castor:

- ✓ absorbing
- ✓ ride over obstacles
- ✓ to keep clean

## LIV SYSTEMS stainless steel Fixed castor + elastic rubber tyre Ø125 x W35mm for 200kg Prod ID: 42224

ID 42224: Castor overall height 155 mm | 4 mounting holes with distance 80x60 mm | Wheel with ball bearing and elastic rubber tyre with hardness 70 ° Shore A | Tile floor ride, shock absorbing, smooth ride over obstacles, easy to keep clean

## Product information


- Article code 2-041-25K
- SKU 42224
- EAN 3838461422249

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)



## Product description

stainless steel Wheel with plain bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A on polyamide

Wheel diameter x width: 125 x 32 mm

Axle hole: 8,5 mm

Hub length: 44 mm

### Approved and tested load capacity

Dynamic 200 kg

Static 250 kg

### Temperature range:

Continuous operation: -25 | +55°C

Short (10 min) exposure: -30 | +55°C

### Advantages of this No trail highway drive wheel:


- ✓ deform if stationed
- ✓ range of temperatures
- ✓ resistant

## LIV SYSTEMS stainless steel wheel + injection-moulded polyurethane tread Ø125 x W32mm for 200kg Prod ID: 43095

ID 43095:stainless steel Wheel with plain bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A on polyamide | Axle hole: 8,5 mm | Hub length: 44 mm | No trail highway drive, low deform if stationed, wide range of temperatures, oil r

## Product information

- Article code 2-050-25D
- SKU 43095
- EAN 3838461430954



## Product description

stainless steel Wheel with roller bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A on polyamide

Wheel diameter x width: 125 x 32 mm

Axle hole: 8,5 mm

Hub length: 44 mm

### Approved and tested load capacity

Dynamic 200 kg

Static 250 kg

### Temperature range:

Continuous operation: -25 | +55°C

Short (10 min) exposure: -30 | +55°C

### Advantages of this No trail highway drive wheel:

- ✓ deform if stationed
- ✓ range of temperatures
- ✓ resistant


## LIV SYSTEMS stainless steel wheel + injection-moulded polyurethane tread Ø125 x W32mm for 200kg Prod ID: 43035

ID 43035: stainless steel Wheel with roller bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A on polyamide | Axle hole: 8,5 mm | Hub length: 44 mm | No trail highway drive, low deform if stationed, wide range of temperatures, oil

## Product information

- Article code 2-050-25V
- SKU 43035
- EAN 3838461430350



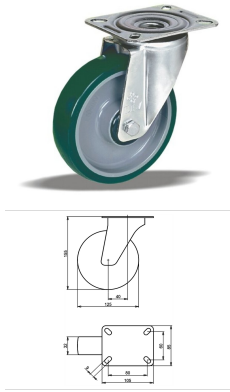

## Product description

stainless steel Swivel castor with an overall height of 155 mm

Wheel diameter x width: 125 x 32 mm

Top plate with 4 mounting holes of 9 mm, mounting hole distance 80x60 mm and top plate outer dimensions: 105x85 mm

Wheel with plain bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A on polyamide.

### Approved and tested load capacity

Dynamic 200 kg

Static 250 kg

### Temperature range:

Continuous operation: -25 | +55°C

Short (10 min) exposure: -30 | +55°C

### Advantages of this No trail highway drive Swivel castor:

- ✓ deformation if rarely moved
- ✓ range of temperatures
- ✓ resistant

## LIV SYSTEMS stainless steel Swivel castor + injection-moulded polyurethane tread Ø125 x W32mm for 200kg Prod ID: 41374

ID 41374: Castor overall height 155 mm | 4 mounting holes with distance 80x60 mm | Wheel with plain bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A | No trail highway drive, low deformation if rarely moved, wide range of temper

## Product information


- Article code 2-052-25D
- SKU 41374
- EAN 3838461413742

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

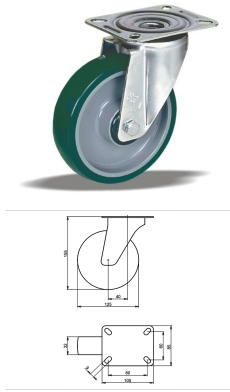

## Product description

stainless steel Swivel castor with an overall height of 155 mm

Wheel diameter x width: 125 x 32 mm

Top plate with 4 mounting holes of 9 mm, mounting hole distance 80x60 mm and top plate outer dimensions: 105x85 mm

Wheel with roller bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A on polyamide.

### Approved and tested load capacity

Dynamic 200 kg

Static 250 kg

### Temperature range:

Continuous operation: -25 | +55°C

Short (10 min) exposure: -30 | +55°C

### Advantages of this No trail highway drive Swivel castor:

- ✓ deformation if rarely moved
- ✓ range of temperatures
- ✓ resistant

## LIV SYSTEMS stainless steel Swivel castor + injection-moulded polyurethane tread Ø125 x W32mm for 200kg Prod ID: 41373

ID 41373: Castor overall height 155 mm | 4 mounting holes with distance 80x60 mm | Wheel with roller bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A | No trail highway drive, low deformation if rarely moved, wide range of tempe

## Product information


- Article code 2-052-25V
- SKU 41373
- EAN 3838461413735

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

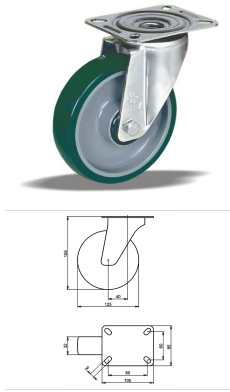

## Product description

stainless steel Swivel castor with an overall height of 155 mm

Wheel diameter x width: 125 x 32 mm

Top plate with 4 mounting holes of 9 mm, mounting hole distance 80x60 mm and top plate outer dimensions: 105x85 mm

Wheel with ball bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A on polyamide.

### Approved and tested load capacity

Dynamic 200 kg

Static 250 kg

### Temperature range:

Continuous operation: -25 | +55°C

Short (10 min) exposure: -30 | +55°C

### Advantages of this No trail highway drive Swivel castor:

- ✓ deformation if rarely moved
- ✓ range of temperatures
- ✓ resistant

## LIV SYSTEMS stainless steel Swivel castor + injection-moulded polyurethane tread Ø125 x W32mm for 200kg Prod ID: 42173

ID 42173: Castor overall height 155 mm | 4 mounting holes with distance 80x60 mm | Wheel with ball bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A | No trail highway drive, low deformation if rarely moved, wide range of tempera

## Product information


- Article code 2-052-25K
- SKU 42173
- EAN 3838461421730

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

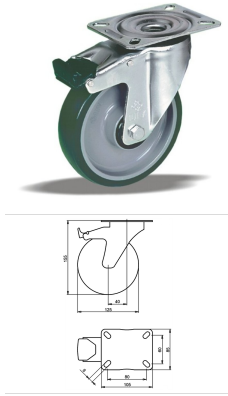

## Product description

stainless steel Swivel castor with brake with an overall height of 155 mm

Wheel diameter x width: 125 x 32 mm

Top plate with 4 mounting holes of 9 mm, mounting hole distance 80x60 mm and top plate outer dimensions: 105x85 mm

Wheel with plain bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A on polyamide

the double brake system, brakes the turning of the wheel and the swivel rotation.

### Approved and tested load capacity

Dynamic 200 kg

Static 250 kg

### Temperature range:

Continuous operation: -25 | +55°C

Short (10 min) exposure: -30 | +55°C

### Advantages of this No trail highway drive Swivel castor with brake:

- ✓ deformation if rarely moved
- ✓ range of temperatures
- ✓ resistant

## LIV SYSTEMS stainless steel Swivel castor with brake + injection-moulded polyurethane tread Ø125 x W32mm for 200kg Prod ID: 41385

ID 41385: Castor overall height 155 mm | 4 mounting holes with distance 80x60 mm | Wheel with plain bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A | The double brake system, brakes the turning of the wheel and the swivel rotation

## Product information


- Article code 2-053-25D
- SKU 41385
- EAN 3838461413858

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

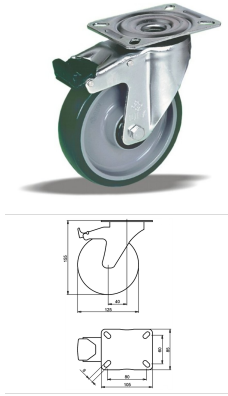

## Product description

stainless steel Swivel castor with brake with an overall height of 155 mm

Wheel diameter x width: 125 x 32 mm

Top plate with 4 mounting holes of 9 mm, mounting hole distance 80x60 mm and top plate outer dimensions: 105x85 mm

Wheel with roller bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A on polyamide

the double brake system, brakes the turning of the wheel and the swivel rotation.

### Approved and tested load capacity

Dynamic 200 kg

Static 250 kg

### Temperature range:

Continuous operation: -25 | +55°C

Short (10 min) exposure: -30 | +55°C

### Advantages of this No trail highway drive Swivel castor with brake:

- ✓ deformation if rarely moved
- ✓ range of temperatures
- ✓ resistant

## LIV SYSTEMS stainless steel Swivel castor with brake + injection-moulded polyurethane tread Ø125 x W32mm for 200kg Prod ID: 41384

ID 41384: Castor overall height 155 mm | 4 mounting holes with distance 80x60 mm | Wheel with roller bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A | The double brake system, brakes the turning of the wheel and the swivel rota

## Product information


- Article code 2-053-25V
- SKU 41384
- EAN 3838461413841

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

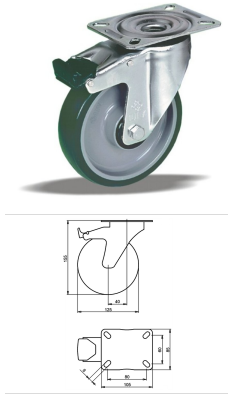

## Product description

stainless steel Swivel castor with brake with an overall height of 155 mm

Wheel diameter x width: 125 x 32 mm

Top plate with 4 mounting holes of 9 mm, mounting hole distance 80x60 mm and top plate outer dimensions: 105x85 mm

Wheel with ball bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A on polyamide

the double brake system, brakes the turning of the wheel and the swivel rotation.

### Approved and tested load capacity

Dynamic 200 kg

Static 250 kg

### Temperature range:

Continuous operation: -25 | +55°C

Short (10 min) exposure: -30 | +55°C

### Advantages of this No trail highway drive Swivel castor with brake:

- ✓ deformation if rarely moved
- ✓ range of temperatures
- ✓ resistant

## LIV SYSTEMS stainless steel Swivel castor with brake + injection-moulded polyurethane tread Ø125 x W32mm for 200kg Prod ID: 42184

ID 42184: Castor overall height 155 mm | 4 mounting holes with distance 80x60 mm | Wheel with ball bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A | The double brake system, brakes the turning of the wheel and the swivel rotation

## Product information


- Article code 2-053-25K
- SKU 42184
- EAN 3838461421846

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

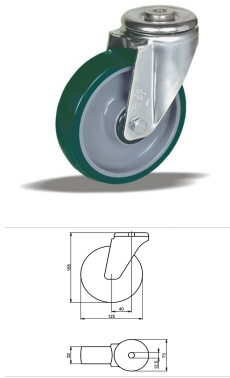

## Product description

stainless steel Swivel castor with an overall height of 155 mm

Wheel diameter x width: 125 x 32 mm

Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 73 mm

Wheel with plain bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A on polyamide.

### Approved and tested load capacity

Dynamic 200 kg

Static 250 kg

### Temperature range:

Continous operation: -25 | +55°C

Short (10 min) exposure: -30 | +55°C

### Advantages of this No trail highway drive Swivel castor:

- ✓ deformation if rarely moved
- ✓ range of temperatures
- ✓ resistant

## LIV SYSTEMS stainless steel Swivel castor + injection-moulded polyurethane tread Ø125 x W32mm for 200kg Prod ID: 41403

ID 41403: Castor overall height 155 mm | 4 mounting holes with distance #\$\$ mm | Wheel with plain bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A | No trail highway drive, low deformation if rarely moved, wide range of temperat

## Product information


- Article code 2-054-25D
- SKU 41403
- EAN 3838461414039

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

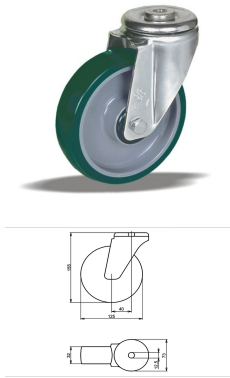

## Product description

stainless steel Swivel castor with an overall height of 155 mm

Wheel diameter x width: 125 x 32 mm

Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 73 mm

Wheel with ball bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A on polyamide.

### Approved and tested load capacity

Dynamic 200 kg

Static 250 kg

### Temperature range:

Continuous operation: -25 | +55°C

Short (10 min) exposure: -30 | +55°C

### Advantages of this No trail highway drive Swivel castor:

- ✓ deformation if rarely moved
- ✓ range of temperatures
- ✓ resistant

## LIV SYSTEMS stainless steel Swivel castor + injection-moulded polyurethane tread Ø125 x W32mm for 200kg Prod ID: 42195

ID 42195: Castor overall height 155 mm | 4 mounting holes with distance #\$\$ mm | Wheel with ball bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A | No trail highway drive, low deformation if rarely moved, wide range of temperatu

## Product information

- Article code 2-054-25K
- SKU 42195
- EAN 3838461421952


## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)



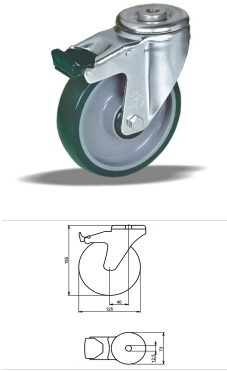

## Product description

stainless steel Swivel castor with brake with an overall height of 155 mm  
 Wheel diameter x width: 125 x 32 mm  
 Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 73 mm  
 Wheel with plain bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A on polyamide  
 the double brake system, brakes the turning of the wheel and the swivel rotation.

### Approved and tested load capacity

Dynamic 200 kg  
 Static 250 kg

### Temperature range:

Continious operation: -25 | +55°C  
 Short (10 min) exposure: -30 | +55°C

### Advantages of this No trail highway drive Swivel castor with brake:

- ✓ deformation if rarely moved
- ✓ range of temperatures
- ✓ resistant

## LIV SYSTEMS stainless steel Swivel castor with brake + injection-moulded polyurethane tread Ø125 x W32mm for 200kg Prod ID: 41414

ID 41414: Castor overall height 155 mm | 4 mounting holes with distance #\$\$ mm | Wheel with plain bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A | The double brake system, brakes the turning of the wheel and the swivel rotatio

## Product information


- Article code 2-055-25D
- SKU 41414
- EAN 3838461414145

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

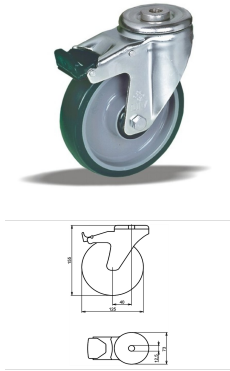

## Product description

stainless steel Swivel castor with brake with an overall height of 155 mm

Wheel diameter x width: 125 x 32 mm

Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 73 mm

Wheel with roller bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A on polyamide

the double brake system, brakes the turning of the wheel and the swivel rotation.

### Approved and tested load capacity

Dynamic 200 kg

Static 250 kg

### Temperature range:

Continious operation: -25 | +55°C

Short (10 min) exposure: -30 | +55°C

### Advantages of this No trail highway drive Swivel castor with brake:

- ✓ deformation if rarely moved
- ✓ range of temperatures
- ✓ resistant

## LIV SYSTEMS stainless steel Swivel castor with brake + injection-moulded polyurethane tread Ø125 x W32mm for 200kg Prod ID: 41413

ID 41413: Castor overall height 155 mm | 4 mounting holes with distance #\$\$ mm | Wheel with roller bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A | The double brake system, brakes the turning of the wheel and the swivel rotati

## Product information


- Article code 2-055-25V
- SKU 41413
- EAN 3838461414138

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

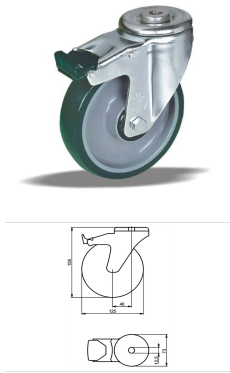

## Product description

stainless steel Swivel castor with brake with an overall height of 155 mm

Wheel diameter x width: 125 x 32 mm

Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 73 mm

Wheel with ball bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A on polyamide

the double brake system, brakes the turning of the wheel and the swivel rotation.

### Approved and tested load capacity

Dynamic 200 kg

Static 250 kg

### Temperature range:

Continious operation: -25 | +55°C

Short (10 min) exposure: -30 | +55°C

### Advantages of this No trail highway drive Swivel castor with brake:

- ✓ deformation if rarely moved
- ✓ range of temperatures
- ✓ resistant

## LIV SYSTEMS stainless steel Swivel castor with brake + injection-moulded polyurethane tread Ø125 x W32mm for 200kg Prod ID: 42213

ID 42213: Castor overall height 155 mm | 4 mounting holes with distance #\$\$ mm | Wheel with ball bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A | The double brake system, brakes the turning of the wheel and the swivel rotation

## Product information


- Article code 2-055-25K
- SKU 42213
- EAN 3838461422133

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

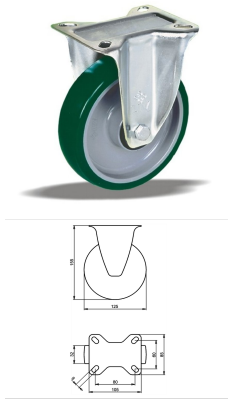

## Product description

stainless steel Fixed castor with an overall height of 155 mm

Wheel diameter x width: 125 x 32 mm

Top plate with 4 mounting holes of 9 mm, mounting hole distance 80x60 mm and top plate outer dimensions: 105x85 mm

Wheel with plain bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A on polyamide.

### Approved and tested load capacity

Dynamic 200 kg

Static 250 kg

### Temperature range:

Continuous operation: -25 | +55°C

Short (10 min) exposure: -30 | +55°C

### Advantages of this No trail highway drive Fixed castor:

- ✓ deformation if rarely moved
- ✓ range of temperatures
- ✓ resistant

## LIV SYSTEMS stainless steel Fixed castor + injection-moulded polyurethane tread Ø125 x W32mm for 200kg Prod

### ID: 41363

ID 41363: Castor overall height 155 mm | 4 mounting holes with distance 80x60 mm | Wheel with plain bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A | No trail highway drive, low deformation if rarely moved, wide range of temper

## Product information


- Article code 2-051-25D
- SKU 41363
- EAN 3838461413636

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

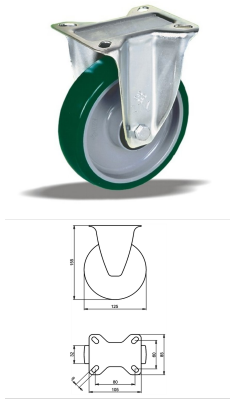

## Product description

stainless steel Fixed castor with an overall height of 155 mm

Wheel diameter x width: 125 x 32 mm

Top plate with 4 mounting holes of 9 mm, mounting hole distance 80x60 mm and top plate outer dimensions: 105x85 mm

Wheel with roller bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A on polyamide.

### Approved and tested load capacity

Dynamic 200 kg

Static 250 kg

### Temperature range:

Continuous operation: -25 | +55°C

Short (10 min) exposure: -30 | +55°C

### Advantages of this No trail highway drive Fixed castor:

- ✓ deformation if rarely moved
- ✓ range of temperatures
- ✓ resistant

## LIV SYSTEMS stainless steel Fixed castor + injection-moulded polyurethane tread Ø125 x W32mm for 200kg Prod

### ID: 41355

ID 41355: Castor overall height 155 mm | 4 mounting holes with distance 80x60 mm | Wheel with roller bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A | No trail highway drive, low deformation if rarely moved, wide range of tempe

## Product information


- Article code 2-051-25V
- SKU 41355
- EAN 3838461413551

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

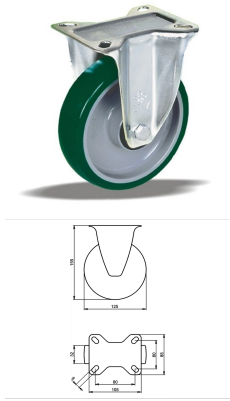

## Product description

stainless steel Fixed castor with an overall height of 155 mm

Wheel diameter x width: 125 x 32 mm

Top plate with 4 mounting holes of 9 mm, mounting hole distance 80x60 mm and top plate outer dimensions: 105x85 mm

Wheel with ball bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A on polyamide.

### Approved and tested load capacity

Dynamic 200 kg

Static 250 kg

### Temperature range:

Continuous operation: -25 | +55°C

Short (10 min) exposure: -30 | +55°C

### Advantages of this No trail highway drive Fixed castor:

- ✓ deformation if rarely moved
- ✓ range of temperatures
- ✓ resistant

## LIV SYSTEMS stainless steel Fixed castor + injection-moulded polyurethane tread Ø125 x W32mm for 200kg Prod

### ID: 42155

ID 42155: Castor overall height 155 mm | 4 mounting holes with distance 80x60 mm | Wheel with ball bearing and injection-moulded polyurethane tread with hardness 92 ° Shore A | No trail highway drive, low deformation if rarely moved, wide range of tempera

## Product information


- Article code 2-051-25K
- SKU 42155
- EAN 3838461421556

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

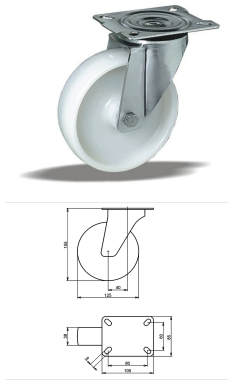

## Product description

stainless steel Swivel castor with an overall height of 155 mm

Wheel diameter x width: 125 x 38 mm

Top plate with 4 mounting holes of 9 mm, mounting hole distance 80x60 mm and top plate outer dimensions: 105x85 mm

Wheel with plain bearing and solid polyamide wheel with hardness 70±5 Shore D.

### Approved and tested load capacity

Dynamic 250 kg

Static 310 kg

### Temperature range:

Continuous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

### Advantages of this Steamy floor in Swivel castor:

✓ washing allowed

✓ shining

✓ hot and wet conditions

## LIV SYSTEMS stainless steel Swivel castor + solid polyamide wheel Ø125 x W38mm for 250kg Prod ID: 41285

ID 41285: Castor overall height 155 mm | 4 mounting holes with distance 80x60 mm | Wheel with plain bearing and solid polyamide wheel with hardness 70±5 Shore D | Steamy floor in, frequent washing allowed, always shining, for hot and wet conditions

## Product information


- Article code 2-672 ISO
- SKU 41285
- EAN 3838461412851

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

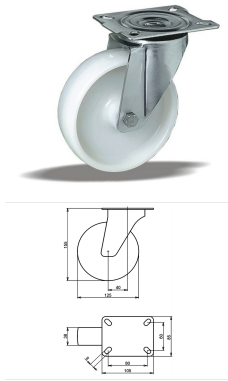

## Product description

stainless steel Swivel castor with an overall height of 155 mm

Wheel diameter x width: 125 x 38 mm

Top plate with 4 mounting holes of 9 mm, mounting hole distance 80x60 mm and top plate outer dimensions: 105x85 mm

Wheel with roller bearing and solid polyamide wheel with hardness 70±5 Shore D.

### Approved and tested load capacity

Dynamic 250 kg

Static 310 kg

### Temperature range:

Continuous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

### Advantages of this Steamy floor in Swivel castor:

✓ washing allowed

✓ shining

✓ hot and wet conditions

## LIV SYSTEMS stainless steel Swivel castor + solid polyamide wheel Ø125 x W38mm for 250kg Prod ID: 41284

ID 41284: Castor overall height 155 mm | 4 mounting holes with distance 80x60 mm | Wheel with roller bearing and solid polyamide wheel with hardness 70±5 Shore D | Steamy floor in, frequent washing allowed, always shining, for hot and wet conditions

## Product information

- Article code 2-662 ISO
- SKU 41284
- EAN 3838461412844


## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)



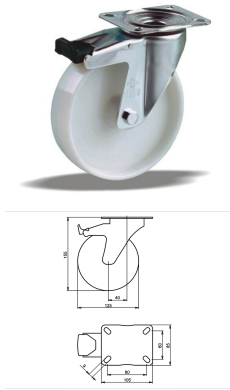

## Product description

stainless steel Swivel castor with brake with an overall height of 155 mm

Wheel diameter x width: 125 x 38 mm

Top plate with 4 mounting holes of 9 mm, mounting hole distance 80x60 mm and top plate outer dimensions: 105x85 mm

Wheel with plain bearing and solid polyamide wheel with hardness 70±5 Shore D

the double brake system, brakes the turning of the wheel and the swivel rotation.

### Approved and tested load capacity

Dynamic 250 kg

Static 310 kg

### Temperature range:

Continuous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

### Advantages of this Steamy floor in Swivel castor with brake:

- ✓ washing allowed
- ✓ shining
- ✓ hot and wet conditions

## LIV SYSTEMS stainless steel Swivel castor with brake + solid polyamide wheel Ø125 x W38mm for 250kg Prod ID: 41305

ID 41305: Castor overall height 155 mm | 4 mounting holes with distance 80x60 mm | Wheel with plain bearing and solid polyamide wheel with hardness 70±5 Shore D | The double brake system, brakes the turning of the wheel and the swivel rotation. | Steamy

## Product information


- Article code 2-684 A
- SKU 41305
- EAN 3838461413056

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

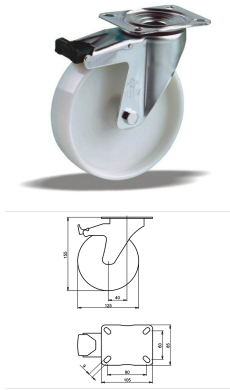

## Product description

stainless steel Swivel castor with brake with an overall height of 155 mm

Wheel diameter x width: 125 x 38 mm

Top plate with 4 mounting holes of 9 mm, mounting hole distance 80x60 mm and top plate outer dimensions: 105x85 mm

Wheel with roller bearing and solid polyamide wheel with hardness 70±5 Shore D

the double brake system, brakes the turning of the wheel and the swivel rotation.

### Approved and tested load capacity

Dynamic 250 kg

Static 310 kg

### Temperature range:

Continuous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

### Advantages of this Steamy floor in Swivel castor with brake:

- ✓ washing allowed
- ✓ shining
- ✓ hot and wet conditions

## LIV SYSTEMS stainless steel Swivel castor with brake + solid polyamide wheel Ø125 x W38mm for 250kg Prod ID: 41304

ID 41304: Castor overall height 155 mm | 4 mounting holes with distance 80x60 mm | Wheel with roller bearing and solid polyamide wheel with hardness 70±5 Shore D | The double brake system, brakes the turning of the wheel and the swivel rotation. | Steamy

## Product information


- Article code 2-723 A
- SKU 41304
- EAN 3838461413049

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

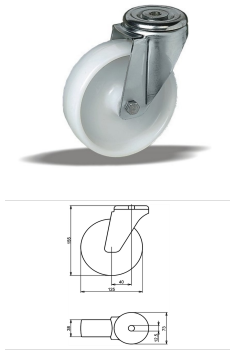

## Product description

stainless steel Swivel castor with an overall height of 155 mm

Wheel diameter x width: 125 x 38 mm

Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 73 mm

Wheel with plain bearing and solid polyamide wheel with hardness 70±5 Shore D.

### Approved and tested load capacity

Dynamic 250 kg

Static 310 kg

### Temperature range:

Continuous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

### Advantages of this Steamy floor in Swivel castor:

- ✓ washing allowed
- ✓ shining
- ✓ hot and wet conditions

## LIV SYSTEMS stainless steel Swivel castor + solid polyamide wheel Ø125 x W38mm for 250kg Prod ID: 41325

ID 41325: Castor overall height 155 mm | 4 mounting holes with distance #\$\$ mm | Wheel with plain bearing and solid polyamide wheel with hardness 70±5 Shore D | Steamy floor in, frequent washing allowed, always shining, for hot and wet conditions

## Product information


- Article code 2-767 L12
- SKU 41325
- EAN 3838461413254

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

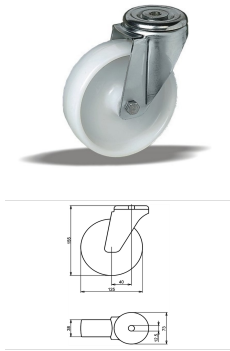

## Product description

stainless steel Swivel castor with an overall height of 155 mm

Wheel diameter x width: 125 x 38 mm

Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 73 mm

Wheel with roller bearing and solid polyamide wheel with hardness 70±5 Shore D.

### Approved and tested load capacity

Dynamic 250 kg

Static 310 kg

### Temperature range:

Continuous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

### Advantages of this Steamy floor in Swivel castor:

- ✓ washing allowed
- ✓ shining
- ✓ hot and wet conditions

## LIV SYSTEMS stainless steel Swivel castor + solid polyamide wheel Ø125 x W38mm for 250kg Prod ID: 41324

ID 41324: Castor overall height 155 mm | 4 mounting holes with distance #\$\$ mm | Wheel with roller bearing and solid polyamide wheel with hardness 70±5 Shore D | Steamy floor in, frequent washing allowed, always shining, for hot and wet conditions

## Product information


- Article code 2-757 L12
- SKU 41324
- EAN 3838461413247

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

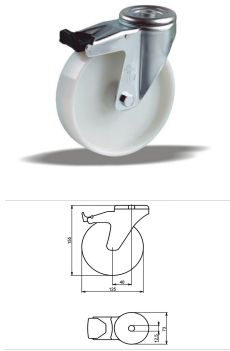

## Product description

stainless steel Swivel castor with brake with an overall height of 155 mm

Wheel diameter x width: 125 x 38 mm

Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 73 mm

Wheel with plain bearing and solid polyamide wheel with hardness 70±5 Shore D

the double brake system, brakes the turning of the wheel and the swivel rotation.

### Approved and tested load capacity

Dynamic 250 kg

Static 310 kg

### Temperature range:

Continious operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

### Advantages of this Steamy floor in Swivel castor with brake:

- ✓ washing allowed
- ✓ shining
- ✓ hot and wet conditions

## LIV SYSTEMS stainless steel Swivel castor with brake + solid polyamide wheel Ø125 x W38mm for 250kg Prod ID: 41345

ID 41345: Castor overall height 155 mm | 4 mounting holes with distance #\$\$ mm | Wheel with plain bearing and solid polyamide wheel with hardness 70±5 Shore D | The double brake system, brakes the turning of the wheel and the swivel rotation. | Steamy fl

## Product information


- Article code 2-795 L12
- SKU 41345
- EAN 3838461413452

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

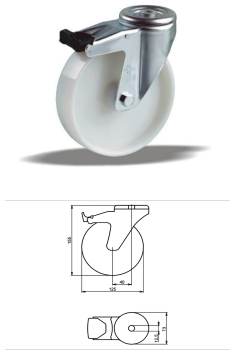

## Product description

stainless steel Swivel castor with brake with an overall height of 155 mm

Wheel diameter x width: 125 x 38 mm

Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 73 mm

Wheel with roller bearing and solid polyamide wheel with hardness 70±5 Shore D

the double brake system, brakes the turning of the wheel and the swivel rotation.

### Approved and tested load capacity

Dynamic 250 kg

Static 310 kg

### Temperature range:

Continious operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

### Advantages of this Steamy floor in Swivel castor with brake:

- ✓ washing allowed
- ✓ shining
- ✓ hot and wet conditions

## LIV SYSTEMS stainless steel Swivel castor with brake + solid polyamide wheel Ø125 x W38mm for 250kg Prod ID: 41344

ID 41344: Castor overall height 155 mm | 4 mounting holes with distance #\$\$ mm | Wheel with roller bearing and solid polyamide wheel with hardness 70±5 Shore D | The double brake system, brakes the turning of the wheel and the swivel rotation. | Steamy f

## Product information


- Article code 2-790 L12
- SKU 41344
- EAN 3838461413445

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

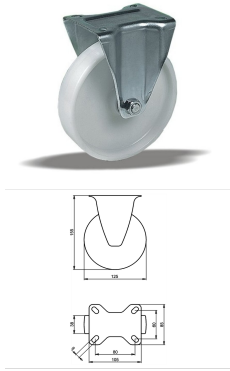

## Product description

stainless steel Fixed castor with an overall height of 155 mm

Wheel diameter x width: 125 x 38 mm

Top plate with 4 mounting holes of 9 mm, mounting hole distance 80x60 mm and top plate outer dimensions: 105x85 mm

Wheel with roller bearing and solid polyamide wheel with hardness 70±5 Shore D.

### Approved and tested load capacity

Dynamic 250 kg

Static 310 kg

### Temperature range:

Continuous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

### Advantages of this Steamy floor in Fixed castor:

- ✓ washing allowed
- ✓ shining
- ✓ hot and wet conditions

## LIV SYSTEMS stainless steel Fixed castor + solid polyamide wheel Ø125 x W38mm for 250kg Prod ID: 41264

ID 41264: Castor overall height 155 mm | 4 mounting holes with distance 80x60 mm | Wheel with roller bearing and solid polyamide wheel with hardness 70±5 Shore D | Steamy floor in, frequent washing allowed, always shining, for hot and wet conditions

## Product information


- Article code 2-667 ISO
- SKU 41264
- EAN 3838461412646

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

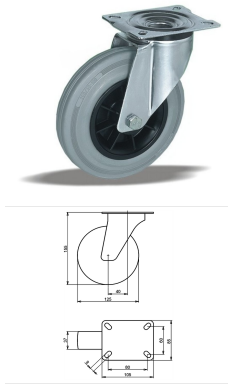

## Product description

stainless steel Swivel castor with an overall height of 155 mm

Wheel diameter x width: 125 x 37 mm

Top plate with 4 mounting holes of 9 mm, mounting hole distance 80x60 mm and top plate outer dimensions: 105x85 mm

Wheel with plain bearing and grey rubber tyre with hardness 83 ° shore A on polypropylene.

### Approved and tested load capacity

Dynamic 130 kg

Static 160 kg

### Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

### Advantages of this Floor floor turns Swivel castor:

- ✓ preservation
- ✓ and steam proof
- ✓ obstacle smooth pass

## LIV SYSTEMS stainless steel Swivel castor + grey rubber tyre Ø125 x W37mm for 130kg Prod ID: 41504

ID 41504: Castor overall height 155 mm | 4 mounting holes with distance 80x60 mm | Wheel with plain bearing and grey rubber tyre with hardness 83 ° shore A | Floor floor turns, floor preservation, wet and steam proof, low obstacle smooth pass

## Product information

- Article code 2-923 ISO
- SKU 41504
- EAN 3838461415043


## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)



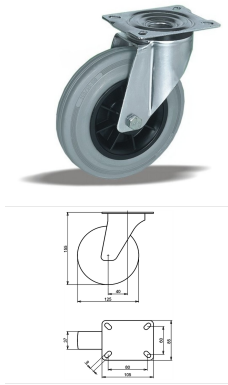

## Product description

stainless steel Swivel castor with an overall height of 155 mm

Wheel diameter x width: 125 x 37 mm

Top plate with 4 mounting holes of 9 mm, mounting hole distance 80x60 mm and top plate outer dimensions: 105x85 mm

Wheel with roller bearing and grey rubber tyre with hardness 83 ° shore A on polypropylene.

### Approved and tested load capacity

Dynamic 130 kg

Static 160 kg

### Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

### Advantages of this Floor floor turns Swivel castor:

- ✓ preservation
- ✓ and steam proof
- ✓ obstacle smooth pass

## LIV SYSTEMS stainless steel Swivel castor + grey rubber tyre Ø125 x W37mm for 130kg Prod ID: 41503

ID 41503: Castor overall height 155 mm | 4 mounting holes with distance 80x60 mm | Wheel with roller bearing and grey rubber tyre with hardness 83 ° shore A | Floor floor turns, floor preservation, wet and steam proof, low obstacle smooth pass

## Product information


- Article code 2-916 ISO
- SKU 41503
- EAN 3838461415036

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

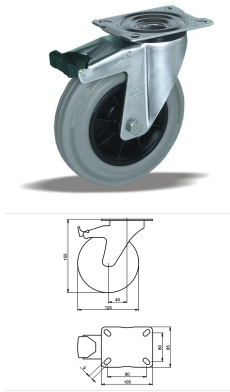

## Product description

stainless steel Swivel castor with brake with an overall height of 155 mm

Wheel diameter x width: 125 x 37 mm

Top plate with 4 mounting holes of 9 mm, mounting hole distance 80x60 mm and top plate outer dimensions: 105x85 mm

Wheel with plain bearing and grey rubber tyre with hardness 83 ° shore A on polypropylene

the double brake system, brakes the turning of the wheel and the swivel rotation.

### Approved and tested load capacity

Dynamic 130 kg

Static 160 kg

### Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

### Advantages of this Floor floor turns Swivel castor with brake:

- ✓ preservation
- ✓ and steam proof
- ✓ obstacle smooth pass

## LIV SYSTEMS stainless steel Swivel castor with brake + grey rubber tyre Ø125 x W37mm for 130kg Prod ID: 41524

ID 41524: Castor overall height 155 mm | 4 mounting holes with distance 80x60 mm | Wheel with plain bearing and grey rubber tyre with hardness 83 ° shore A | The double brake system, brakes the turning of the wheel and the swivel rotation. | Floor floor

## Product information


- Article code 2-937 ISO
- SKU 41524
- EAN 3838461415241

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

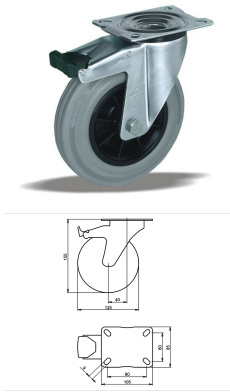

## Product description

stainless steel Swivel castor with brake with an overall height of 155 mm

Wheel diameter x width: 125 x 37 mm

Top plate with 4 mounting holes of 9 mm, mounting hole distance 80x60 mm and top plate outer dimensions: 105x85 mm

Wheel with roller bearing and grey rubber tyre with hardness 83 ° shore A on polypropylene  
the double brake system, brakes the turning of the wheel and the swivel rotation.

### Approved and tested load capacity

Dynamic 130 kg

Static 160 kg

### Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

### Advantages of this Floor floor turns Swivel castor with brake:

- ✓ preservation
- ✓ and steam proof
- ✓ obstacle smooth pass

## LIV SYSTEMS stainless steel Swivel castor with brake + grey rubber tyre Ø125 x W37mm for 130kg Prod ID: 41523

ID 41523: Castor overall height 155 mm | 4 mounting holes with distance 80x60 mm | Wheel with roller bearing and grey rubber tyre with hardness 83 ° shore A | The double brake system, brakes the turning of the wheel and the swivel rotation. | Floor floor

## Product information


- Article code 2-930 ISO
- SKU 41523
- EAN 3838461415234

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)



## Product description

stainless steel Swivel castor with an overall height of 155 mm

Wheel diameter x width: 125 x 37 mm

Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 73 mm

Wheel with plain bearing and grey rubber tyre with hardness 83 ° shore A on polypropylene.

### Approved and tested load capacity

Dynamic 130 kg

Static 160 kg

### Temperature range:

Continous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

### Advantages of this Floor floor turns Swivel castor:

- ✓ preservation
- ✓ and steam proof
- ✓ obstacle smooth pass

## LIV SYSTEMS stainless steel Swivel castor + grey rubber tyre Ø125 x W37mm for 130kg Prod ID: 41544

ID 41544: Castor overall height 155 mm | 4 mounting holes with distance #\$\$ mm | Wheel with plain bearing and grey rubber tyre with hardness 83 ° shore A | Floor floor turns, floor preservation, wet and steam proof, low obstacle smooth pass

## Product information


- Article code 2-974 L12
- SKU 41544
- EAN 3838461415449

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)



## Product description

stainless steel Swivel castor with an overall height of 155 mm

Wheel diameter x width: 125 x 37 mm

Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 73 mm

Wheel with roller bearing and grey rubber tyre with hardness 83 ° shore A on polypropylene.

### Approved and tested load capacity

Dynamic 130 kg

Static 160 kg

### Temperature range:

Continous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

### Advantages of this Floor floor turns Swivel castor:

- ✓ preservation
- ✓ and steam proof
- ✓ obstacle smooth pass

## LIV SYSTEMS stainless steel Swivel castor + grey rubber tyre Ø125 x W37mm for 130kg Prod ID: 41543

ID 41543: Castor overall height 155 mm | 4 mounting holes with distance #\$\$ mm | Wheel with roller bearing and grey rubber tyre with hardness 83 ° shore A | Floor floor turns, floor preservation, wet and steam proof, low obstacle smooth pass

## Product information


- Article code 2-967 L12
- SKU 41543
- EAN 3838461415432

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

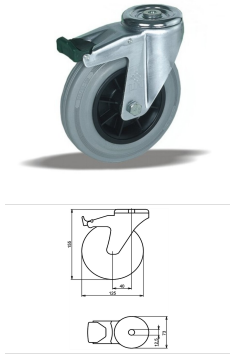

## Product description

stainless steel Swivel castor with brake with an overall height of 155 mm

Wheel diameter x width: 125 x 37 mm

Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 73 mm

Wheel with plain bearing and grey rubber tyre with hardness 83 ° shore A on polypropylene

the double brake system, brakes the turning of the wheel and the swivel rotation.

### Approved and tested load capacity

Dynamic 130 kg

Static 160 kg

### Temperature range:

Continious operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

### Advantages of this Floor floor turns Swivel castor with brake:

- ✓ preservation
- ✓ and steam proof
- ✓ obstacle smooth pass

## LIV SYSTEMS stainless steel Swivel castor with brake + grey rubber tyre Ø125 x W37mm for 130kg Prod ID: 41564

ID 41564: Castor overall height 155 mm | 4 mounting holes with distance #\$\$ mm | Wheel with plain bearing and grey rubber tyre with hardness 83 ° shore A | The double brake system, brakes the turning of the wheel and the swivel rotation. | Floor floor tu

## Product information


- Article code 2-988 L12
- SKU 41564
- EAN 3838461415647

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

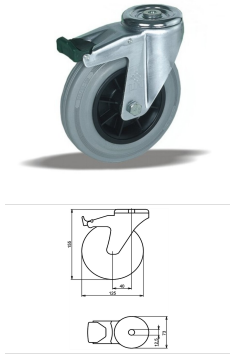

## Product description

stainless steel Swivel castor with brake with an overall height of 155 mm

Wheel diameter x width: 125 x 37 mm

Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 73 mm

Wheel with roller bearing and grey rubber tyre with hardness 83 ° shore A on polypropylene

the double brake system, brakes the turning of the wheel and the swivel rotation.

### Approved and tested load capacity

Dynamic 130 kg

Static 160 kg

### Temperature range:

Continious operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

### Advantages of this Floor floor turns Swivel castor with brake:

- ✓ preservation
- ✓ and steam proof
- ✓ obstacle smooth pass

## LIV SYSTEMS stainless steel Swivel castor with brake + grey rubber tyre Ø125 x W37mm for 130kg Prod ID: 41563

ID 41563: Castor overall height 155 mm | 4 mounting holes with distance #\$\$ mm | Wheel with roller bearing and grey rubber tyre with hardness 83 ° shore A | The double brake system, brakes the turning of the wheel and the swivel rotation. | Floor floor t

## Product information


- Article code 2-981 L12
- SKU 41563
- EAN 3838461415630

## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

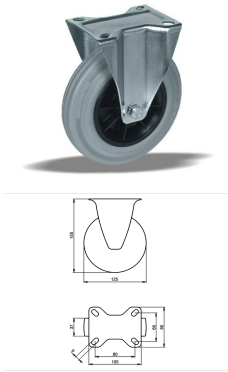

## Product description

stainless steel Fixed castor with an overall height of 155 mm

Wheel diameter x width: 125 x 37 mm

Top plate with 4 mounting holes of 9 mm, mounting hole distance 80x60 mm and top plate outer dimensions: 105x85 mm

Wheel with plain bearing and grey rubber tyre with hardness 83 ° shore A on polypropylene.

### Approved and tested load capacity

Dynamic 130 kg

Static 160 kg

### Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

### Advantages of this Floor floor turns Fixed castor:

- ✓ preservation
- ✓ and steam proof
- ✓ obstacle smooth pass

## LIV SYSTEMS stainless steel Fixed castor + grey rubber tyre Ø125 x W37mm for 130kg Prod ID: 41484

ID 41484: Castor overall height 155 mm | 4 mounting holes with distance 80x60 mm | Wheel with plain bearing and grey rubber tyre with hardness 83 ° shore A | Floor floor turns, floor preservation, wet and steam proof, low obstacle smooth pass

## Product information

- Article code 2-960 ISO
- SKU 41484
- EAN 3838461414848


## Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)



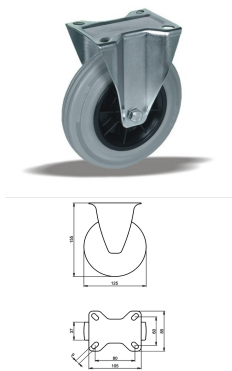

## Product description

stainless steel Fixed castor with an overall height of 155 mm

Wheel diameter x width: 125 x 37 mm

Top plate with 4 mounting holes of 9 mm, mounting hole distance 80x60 mm and top plate outer dimensions: 105x85 mm

Wheel with roller bearing and grey rubber tyre with hardness 83 ° shore A on polypropylene.

### Approved and tested load capacity

Dynamic 130 kg

Static 160 kg

### Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

### Advantages of this Floor floor turns Fixed castor:

- ✓ preservation
- ✓ and steam proof
- ✓ obstacle smooth pass

## LIV SYSTEMS stainless steel Fixed castor + grey rubber tyre Ø125 x W37mm for 130kg Prod ID: 41483

ID 41483: Castor overall height 155 mm | 4 mounting holes with distance 80x60 mm | Wheel with roller bearing and grey rubber tyre with hardness 83 ° shore A | Floor floor turns, floor preservation, wet and steam proof, low obstacle smooth pass

## Product information

- Article code 2-953 ISO
- SKU 41483
- EAN 3838461414831

**Алматы** (7273)495-231  
**Ангарск** (3955)60-70-56  
**Архангельск** (8182)63-90-72  
**Астрахань** (8512)99-46-04  
**Барнаул** (3852)73-04-60  
**Белгород** (4722)40-23-64  
**Благовещенск** (4162)22-76-07  
**Брянск** (4832)59-03-52  
**Владивосток** (423)249-28-31  
**Владикавказ** (8672)28-90-48  
**Владимир** (4922)49-43-18  
**Волгоград** (844)278-03-48  
**Вологда** (8172)26-41-59  
**Воронеж** (473)204-51-73  
**Екатеринбург** (343)384-55-89

**Иваново** (4932)77-34-06  
**Ижевск** (3412)26-03-58  
**Иркутск** (395)279-98-46  
**Казань** (843)206-01-48  
**Калининград** (4012)72-03-81  
**Калуга** (4842)92-23-67  
**Кемерово** (3842)65-04-62  
**Киров** (8332)68-02-04  
**Коломна** (4966)23-41-49  
**Кострома** (4942)77-07-48  
**Краснодар** (861)203-40-90  
**Красноярск** (391)204-63-61  
**Курск** (4712)77-13-04  
**Курган** (3522)50-90-47  
**Липецк** (4742)52-20-81

**Магнитогорск** (3519)55-03-13  
**Москва** (495)268-04-70  
**Мурманск** (8152)59-64-93  
**Набережные Челны** (8552)20-53-41  
**Нижний Новгород** (831)429-08-12  
**Новокузнецк** (3843)20-46-81  
**Ноябрьск** (3496)41-32-12  
**Новосибирск** (383)227-86-73  
**Омск** (3812)21-46-40  
**Орел** (4862)44-53-42  
**Оренбург** (3532)37-68-04  
**Пенза** (8412)22-31-16  
**Петрозаводск** (8142)55-98-37  
**Псков** (8112)59-10-37  
**Пермь** (342)205-81-47

**Ростов-на-Дону** (863)308-18-15  
**Рязань** (4912)46-61-64  
**Самара** (846)206-03-16  
**Санкт-Петербург** (812)309-46-40  
**Саратов** (845)249-38-78  
**Севастополь** (8692)22-31-93  
**Саранск** (8342)22-96-24  
**Симферополь** (3652)67-13-56  
**Смоленск** (4812)29-41-54  
**Сочи** (862)225-72-31  
**Ставрополь** (8652)20-65-13  
**Сургут** (3462)77-98-35  
**Сыктывкар** (8212)25-95-17  
**Тамбов** (4752)50-40-97  
**Тверь** (4822)63-31-35

**Тольятти** (8482)63-91-07  
**Томск** (3822)98-41-53  
**Тула** (4872)33-79-87  
**Тюмень** (3452)66-21-18  
**Ульяновск** (8422)24-23-59  
**Улан-Удэ** (3012)59-97-51  
**Уфа** (347)229-48-12  
**Хабаровск** (4212)92-98-04  
**Чебоксары** (8352)28-53-07  
**Челябинск** (351)202-03-61  
**Череповец** (8202)49-02-64  
**Чита** (3022)38-34-83  
**Якутск** (4112)23-90-97  
**Ярославль** (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(7172)727-132

Киргизия +996(312)96-26-47

<https://liv.nt-rt.ru/> || [vis@nt-rt.ru](mailto:vis@nt-rt.ru)