

Product description

stainless steel Swivel castor with brake with an overall height of 106 mm
 Wheel diameter x width: 80 x 35 mm
 Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #5% mm and top plate outer dimensions: 73 mm
 Wheel with plain bearing and solid polyamide wheel with hardness 70±5 Shore D
 the double brake system, brakes the turning of the wheel and the swivel rotation.

Approved and tested load capacity

Dynamic 150 kg
 Static 180 kg

Temperature range:

Continuous operation: -25 | +80°C
 Short (10 min) exposure: -30 | +110°C

Advantages of this Steamy floor in Swivel castor with brake:

- ✓ washing allowed
- ✓ shining
- ✓ hot and wet conditions

LIV SYSTEMS stainless steel Swivel castor with brake + solid polyamide wheel Ø80 x W35mm for 150kg Prod ID: 41334

ID 41334: Castor overall height 106 mm | 4 mounting holes with distance #5% mm | Wheel with plain bearing and solid polyamide wheel with hardness 70±5 Shore D | The double brake system, brakes the turning of the wheel and the swivel rotation. | Steamy fl

Product information

- Article code 2-793 L12
- SKU 41334
- EAN 3838461413346

Алматы (7273)495-231
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35


Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(7172)727-132

Киргизия +996(312)96-26-47

<https://liv.nt-rt.ru/> || vis@nt-rt.ru

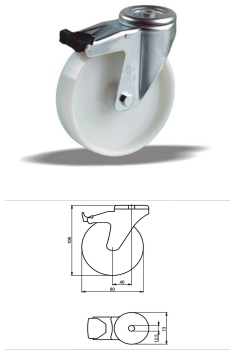

Product description

stainless steel Swivel castor with brake with an overall height of 106 mm

Wheel diameter x width: 80 x 35 mm

Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 73 mm

Wheel with plain bearing and solid polyamide wheel with hardness 70±5 Shore D

the double brake system, brakes the turning of the wheel and the swivel rotation.

Approved and tested load capacity

Dynamic 150 kg

Static 180 kg

Temperature range:

Continious operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

Advantages of this Steamy floor in Swivel castor with brake:

- ✓ washing allowed
- ✓ shining
- ✓ hot and wet conditions

LIV SYSTEMS stainless steel Swivel castor with brake + solid polyamide wheel Ø80 x W35mm for 150kg Prod ID: 41334

ID 41334: Castor overall height 106 mm | 4 mounting holes with distance #\$\$ mm | Wheel with plain bearing and solid polyamide wheel with hardness 70±5 Shore D | The double brake system, brakes the turning of the wheel and the swivel rotation. | Steamy fl

Product information


- Article code 2-793 L12
- SKU 41334
- EAN 3838461413346

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

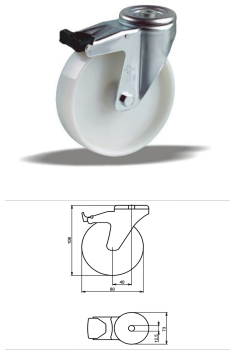

Product description

stainless steel Swivel castor with brake with an overall height of 106 mm

Wheel diameter x width: 80 x 35 mm

Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 73 mm

Wheel with roller bearing and solid polyamide wheel with hardness 70±5 Shore D

the double brake system, brakes the turning of the wheel and the swivel rotation.

Approved and tested load capacity

Dynamic 150 kg

Static 180 kg

Temperature range:

Continious operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

Advantages of this Steamy floor in Swivel castor with brake:

- ✓ washing allowed
- ✓ shining
- ✓ hot and wet conditions

LIV SYSTEMS stainless steel Swivel castor with brake + solid polyamide wheel Ø80 x W35mm for 150kg Prod ID: 41333

ID 41333: Castor overall height 106 mm | 4 mounting holes with distance #\$\$ mm | Wheel with roller bearing and solid polyamide wheel with hardness 70±5 Shore D | The double brake system, brakes the turning of the wheel and the swivel rotation. | Steamy f

Product information


- Article code 2-788 L12
- SKU 41333
- EAN 3838461413339

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

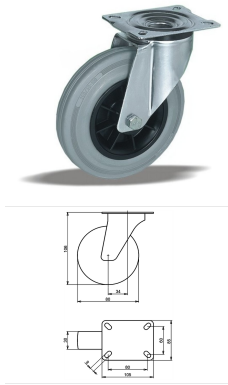

Product description

stainless steel Swivel castor with an overall height of 106 mm

Wheel diameter x width: 80 x 30 mm

Top plate with 4 mounting holes of 9 mm, mounting hole distance 80x60 mm and top plate outer dimensions: 105x85 mm

Wheel with plain bearing and grey rubber tyre with hardness 83 ° shore A on polypropylene.

Approved and tested load capacity

Dynamic 65 kg

Static 80 kg

Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

Advantages of this Floor floor turns Swivel castor:

- ✓ preservation
- ✓ and steam proof
- ✓ obstacle smooth pass

LIV SYSTEMS stainless steel Swivel castor + grey rubber tyre Ø80 x W30mm for 65kg Prod ID: 41493

ID 41493: Castor overall height 106 mm | 4 mounting holes with distance 80x60 mm | Wheel with plain bearing and grey rubber tyre with hardness 83 ° shore A | Floor floor turns, floor preservation, wet and steam proof, low obstacle smooth pass

Product information


- Article code 2-921 ISO
- SKU 41493
- EAN 3838461414930

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

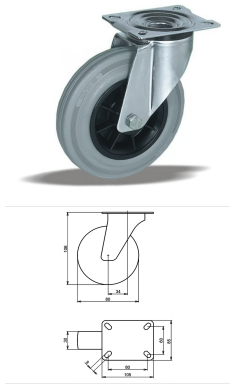

Product description

stainless steel Swivel castor with an overall height of 106 mm

Wheel diameter x width: 80 x 30 mm

Top plate with 4 mounting holes of 9 mm, mounting hole distance 80x60 mm and top plate outer dimensions: 105x85 mm

Wheel with roller bearing and grey rubber tyre with hardness 83 ° shore A on polypropylene.

Approved and tested load capacity

Dynamic 65 kg

Static 80 kg

Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

Advantages of this Floor floor turns Swivel castor:

- ✓ preservation
- ✓ and steam proof
- ✓ obstacle smooth pass

LIV SYSTEMS stainless steel Swivel castor + grey rubber tyre Ø80 x W30mm for 65kg Prod ID: 41485

ID 41485: Castor overall height 106 mm | 4 mounting holes with distance 80x60 mm | Wheel with roller bearing and grey rubber tyre with hardness 83 ° shore A | Floor floor turns, floor preservation, wet and steam proof, low obstacle smooth pass

Product information


- Article code 2-914 ISO
- SKU 41485
- EAN 3838461414855

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

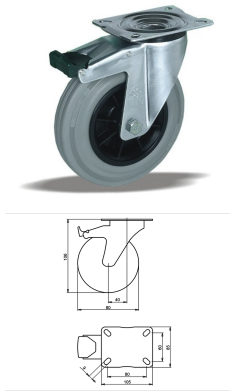

Product description

stainless steel Swivel castor with brake with an overall height of 106 mm

Wheel diameter x width: 80 x 30 mm

Top plate with 4 mounting holes of 9 mm, mounting hole distance 80x60 mm and top plate outer dimensions: 105x85 mm

Wheel with plain bearing and grey rubber tyre with hardness 83 ° shore A on polypropylene
the double brake system, brakes the turning of the wheel and the swivel rotation.

Approved and tested load capacity

Dynamic 65 kg

Static 80 kg

Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

Advantages of this Floor floor turns Swivel castor with brake:

- ✓ preservation
- ✓ and steam proof
- ✓ obstacle smooth pass

LIV SYSTEMS stainless steel Swivel castor with brake + grey rubber tyre Ø80 x W30mm for 65kg Prod ID: 41513

ID 41513: Castor overall height 106 mm | 4 mounting holes with distance 80x60 mm | Wheel with plain bearing and grey rubber tyre with hardness 83 ° shore A | The double brake system, brakes the turning of the wheel and the swivel rotation. | Floor floor

Product information


- Article code 2-935 ISO
- SKU 41513
- EAN 3838461415135

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)



Product description

stainless steel Swivel castor with an overall height of 106 mm

Wheel diameter x width: 80 x 30 mm

Top plate with 4 mounting holes of 12,5 mm, mounting hole distance 73 mm and top plate outer dimensions: 73 mm

Wheel with plain bearing and grey rubber tyre with hardness 83 ° shore A on polypropylene.

Approved and tested load capacity

Dynamic 65 kg

Static 80 kg

Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

Advantages of this Floor floor turns Swivel castor:

- ✓ preservation
- ✓ and steam proof
- ✓ obstacle smooth pass

LIV SYSTEMS stainless steel Swivel castor + grey rubber tyre Ø80 x W30mm for 65kg Prod ID: 41533

ID 41533: Castor overall height 106 mm | 4 mounting holes with distance 73 mm | Wheel with plain bearing and grey rubber tyre with hardness 83 ° shore A | Floor floor turns, floor preservation, wet and steam proof, low obstacle smooth pass

Product information


- Article code 2-972 L12
- SKU 41533
- EAN 3838461415333

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

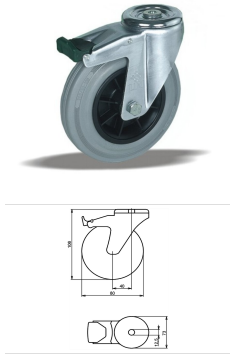

Product description

stainless steel Swivel castor with brake with an overall height of 106 mm
 Wheel diameter x width: 80 x 30 mm
 Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 73 mm
 Wheel with plain bearing and grey rubber tyre with hardness 83 ° shore A on polypropylene
 the double brake system, brakes the turning of the wheel and the swivel rotation.

Approved and tested load capacity

Dynamic 65 kg
 Static 80 kg

Temperature range:

Continious operation: -20 | +70°C
 Short (10 min) exposure: -30 | +80°C

Advantages of this Floor floor turns Swivel castor with brake:

- ✓ preservation
- ✓ and steam proof
- ✓ obstacle smooth pass

LIV SYSTEMS stainless steel Swivel castor with brake + grey rubber tyre Ø80 x W30mm for 65kg Prod ID: 41553

ID 41553: Castor overall height 106 mm | 4 mounting holes with distance #\$\$ mm | Wheel with plain bearing and grey rubber tyre with hardness 83 ° shore A | The double brake system, brakes the turning of the wheel and the swivel rotation. | Floor floor tu

Product information


- Article code 2-986 L12
- SKU 41553
- EAN 3838461415531

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

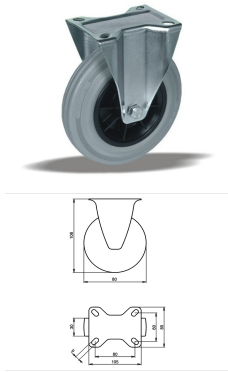

Product description

stainless steel Fixed castor with an overall height of 106 mm

Wheel diameter x width: 80 x 30 mm

Top plate with 4 mounting holes of 9 mm, mounting hole distance 80x60 mm and top plate outer dimensions: 105x85 mm

Wheel with plain bearing and grey rubber tyre with hardness 83 ° shore A on polypropylene.

Approved and tested load capacity

Dynamic 65 kg

Static 80 kg

Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

Advantages of this Floor floor turns Fixed castor:

- ✓ preservation
- ✓ and steam proof
- ✓ obstacle smooth pass

LIV SYSTEMS stainless steel Fixed castor + grey rubber tyre Ø80 x W30mm for 65kg Prod ID: 41473

ID 41473: Castor overall height 106 mm | 4 mounting holes with distance 80x60 mm | Wheel with plain bearing and grey rubber tyre with hardness 83 ° shore A | Floor floor turns, floor preservation, wet and steam proof, low obstacle smooth pass

Product information


- Article code 2-958 ISO
- SKU 41473
- EAN 3838461414732

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

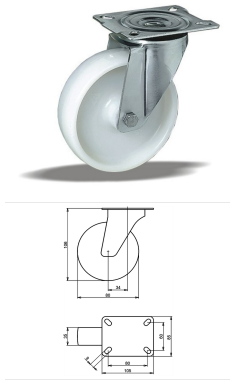

Product description

stainless steel Swivel castor with an overall height of 106 mm

Wheel diameter x width: 80 x 35 mm

Top plate with 4 mounting holes of 9 mm, mounting hole distance 80x60 mm and top plate outer dimensions: 105x85 mm

Wheel with plain bearing and solid polyamide wheel with hardness 70±5 Shore D.

Approved and tested load capacity

Dynamic 150 kg

Static 180 kg

Temperature range:

Continuous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

Advantages of this Steamy floor in Swivel castor:

- ✓ washing allowed
- ✓ shining
- ✓ hot and wet conditions

LIV SYSTEMS stainless steel Swivel castor + solid polyamide wheel Ø80 x W35mm for 150kg Prod ID: 41274

ID 41274: Castor overall height 106 mm | 4 mounting holes with distance 80x60 mm | Wheel with plain bearing and solid polyamide wheel with hardness 70±5 Shore D | Steamy floor in, frequent washing allowed, always shining, for hot and wet conditions

Product information


- Article code 2-670 ISO
- SKU 41274
- EAN 3838461412745

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

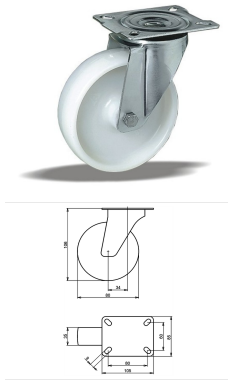

Product description

stainless steel Swivel castor with an overall height of 106 mm

Wheel diameter x width: 80 x 35 mm

Top plate with 4 mounting holes of 9 mm, mounting hole distance 80x60 mm and top plate outer dimensions: 105x85 mm

Wheel with roller bearing and solid polyamide wheel with hardness 70±5 Shore D.

Approved and tested load capacity

Dynamic 150 kg

Static 180 kg

Temperature range:

Continuous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

Advantages of this Steamy floor in Swivel castor:

- ✓ washing allowed
- ✓ shining
- ✓ hot and wet conditions

LIV SYSTEMS stainless steel Swivel castor + solid polyamide wheel Ø80 x W35mm for 150kg Prod ID: 41273

ID 41273: Castor overall height 106 mm | 4 mounting holes with distance 80x60 mm | Wheel with roller bearing and solid polyamide wheel with hardness 70±5 Shore D | Steamy floor in, frequent washing allowed, always shining, for hot and wet conditions

Product information


- Article code 2-660 ISO
- SKU 41273
- EAN 3838461412738

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

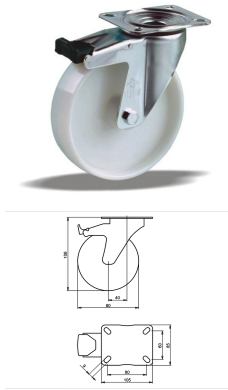

Product description

stainless steel Swivel castor with brake with an overall height of 106 mm

Wheel diameter x width: 80 x 35 mm

Top plate with 4 mounting holes of 9 mm, mounting hole distance 80x60 mm and top plate outer dimensions: 105x85 mm

Wheel with plain bearing and solid polyamide wheel with hardness 70±5 Shore D

the double brake system, brakes the turning of the wheel and the swivel rotation.

Approved and tested load capacity

Dynamic 150 kg

Static 180 kg

Temperature range:

Continuous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

Advantages of this Steamy floor in Swivel castor with brake:

- ✓ washing allowed
- ✓ shining
- ✓ hot and wet conditions

LIV SYSTEMS stainless steel Swivel castor with brake + solid polyamide wheel Ø80 x W35mm for 150kg Prod ID: 41294

ID 41294: Castor overall height 106 mm | 4 mounting holes with distance 80x60 mm | Wheel with plain bearing and solid polyamide wheel with hardness 70±5 Shore D | The double brake system, brakes the turning of the wheel and the swivel rotation. | Steamy

Product information


- Article code 2-286 A
- SKU 41294
- EAN 3838461412943

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

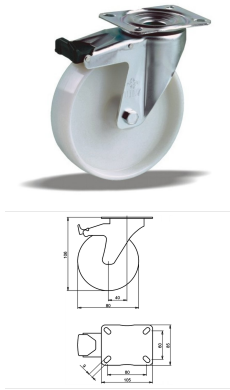

Product description

stainless steel Swivel castor with brake with an overall height of 106 mm

Wheel diameter x width: 80 x 35 mm

Top plate with 4 mounting holes of 9 mm, mounting hole distance 80x60 mm and top plate outer dimensions: 105x85 mm

Wheel with roller bearing and solid polyamide wheel with hardness 70±5 Shore D
the double brake system, brakes the turning of the wheel and the swivel rotation.

Approved and tested load capacity

Dynamic 150 kg

Static 180 kg

Temperature range:

Continuous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

Advantages of this Steamy floor in Swivel castor with brake:

- ✓ washing allowed
- ✓ shining
- ✓ hot and wet conditions

LIV SYSTEMS stainless steel Swivel castor with brake + solid polyamide wheel Ø80 x W35mm for 150kg Prod ID: 41293

ID 41293: Castor overall height 106 mm | 4 mounting holes with distance 80x60 mm | Wheel with roller bearing and solid polyamide wheel with hardness 70±5 Shore D | The double brake system, brakes the turning of the wheel and the swivel rotation. | Steamy

Product information


- Article code 2-721 ISO
- SKU 41293
- EAN 3838461412936

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

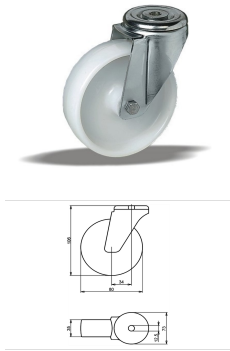

Product description

stainless steel Swivel castor with an overall height of 106 mm

Wheel diameter x width: 80 x 35 mm

Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 73 mm

Wheel with plain bearing and solid polyamide wheel with hardness 70±5 Shore D.

Approved and tested load capacity

Dynamic 150 kg

Static 180 kg

Temperature range:

Continuous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

Advantages of this Steamy floor in Swivel castor:

- ✓ washing allowed
- ✓ shining
- ✓ hot and wet conditions

LIV SYSTEMS stainless steel Swivel castor + solid polyamide wheel Ø80 x W35mm for 150kg Prod ID: 41314

ID 41314: Castor overall height 106 mm | 4 mounting holes with distance #\$\$ mm | Wheel with plain bearing and solid polyamide wheel with hardness 70±5 Shore D | Steamy floor in, frequent washing allowed, always shining, for hot and wet conditions

Product information


- Article code 2-765 L12
- SKU 41314
- EAN 3838461413148

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

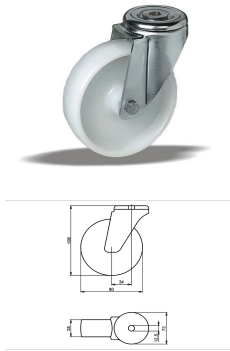

Product description

stainless steel Swivel castor with an overall height of 106 mm

Wheel diameter x width: 80 x 35 mm

Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 73 mm

Wheel with roller bearing and solid polyamide wheel with hardness 70±5 Shore D.

Approved and tested load capacity

Dynamic 150 kg

Static 180 kg

Temperature range:

Continuous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

Advantages of this Steamy floor in Swivel castor:

✓ washing allowed

✓ shining

✓ hot and wet conditions

LIV SYSTEMS stainless steel Swivel castor + solid polyamide wheel Ø80 x W35mm for 150kg Prod ID: 41313

ID 41313: Castor overall height 106 mm | 4 mounting holes with distance #\$\$ mm | Wheel with roller bearing and solid polyamide wheel with hardness 70±5 Shore D |

Steamy floor in, frequent washing allowed, always shining, for hot and wet conditions

Product information


- Article code 2-755 L12
- SKU 41313
- EAN 3838461413131

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

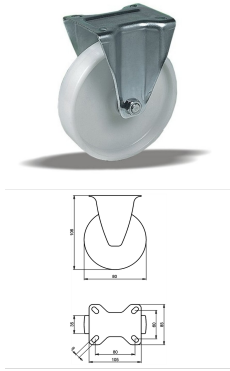

Product description

stainless steel Fixed castor with an overall height of 106 mm

Wheel diameter x width: 80 x 35 mm

Top plate with 4 mounting holes of 9 mm, mounting hole distance 80x60 mm and top plate outer dimensions: 105x85 mm

Wheel with plain bearing and solid polyamide wheel with hardness 70±5 Shore D.

Approved and tested load capacity

Dynamic 150 kg

Static 180 kg

Temperature range:

Continuous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

Advantages of this Steamy floor in Fixed castor:

- ✓ washing allowed
- ✓ shining
- ✓ hot and wet conditions

LIV SYSTEMS stainless steel Fixed castor + solid polyamide wheel Ø80 x W35mm for 150kg Prod ID: 41254

ID 41254: Castor overall height 106 mm | 4 mounting holes with distance 80x60 mm | Wheel with plain bearing and solid polyamide wheel with hardness 70±5 Shore D | Steamy floor in, frequent washing allowed, always shining, for hot and wet conditions

Product information


- Article code 2-675 ISO
- SKU 41254
- EAN 3838461412547

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

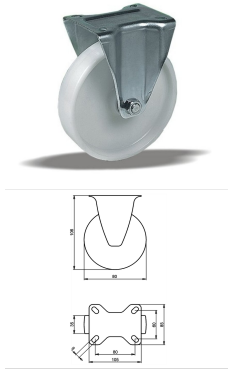

Product description

stainless steel Fixed castor with an overall height of 106 mm

Wheel diameter x width: 80 x 35 mm

Top plate with 4 mounting holes of 9 mm, mounting hole distance 80x60 mm and top plate outer dimensions: 105x85 mm

Wheel with roller bearing and solid polyamide wheel with hardness 70±5 Shore D.

Approved and tested load capacity

Dynamic 150 kg

Static 180 kg

Temperature range:

Continuous operation: -25 | +80°C

Short (10 min) exposure: -30 | +110°C

Advantages of this Steamy floor in Fixed castor:

- ✓ washing allowed
- ✓ shining
- ✓ hot and wet conditions

LIV SYSTEMS stainless steel Fixed castor + solid polyamide wheel Ø80 x W35mm for 150kg Prod ID: 41253

ID 41253: Castor overall height 106 mm | 4 mounting holes with distance 80x60 mm | Wheel with roller bearing and solid polyamide wheel with hardness 70±5 Shore D | Steamy floor in, frequent washing allowed, always shining, for hot and wet conditions

Product information


- Article code 2-655 ISO
- SKU 41253
- EAN 3838461412530

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

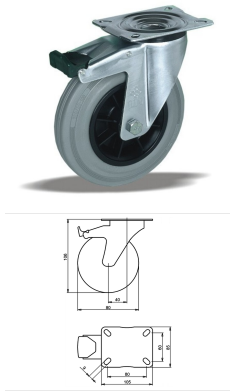

Product description

stainless steel Swivel castor with brake with an overall height of 106 mm
 Wheel diameter x width: 80 x 30 mm
 Top plate with 4 mounting holes of 9 mm, mounting hole distance 80x60 mm and top plate outer dimensions: 105x85 mm
 Wheel with roller bearing and grey rubber tyre with hardness 83 ° shore A on polypropylene
 the double brake system, brakes the turning of the wheel and the swivel rotation.

Approved and tested load capacity

Dynamic 65 kg
 Static 80 kg

Temperature range:

Continuous operation: -20 | +70°C
 Short (10 min) exposure: -30 | +80°C

Advantages of this Floor floor turns Swivel castor with brake:

- ✓ preservation
- ✓ and steam proof
- ✓ obstacle smooth pass

LIV SYSTEMS stainless steel Swivel castor with brake + grey rubber tyre Ø80 x W30mm for 65kg Prod ID: 41505

ID 41505: Castor overall height 106 mm | 4 mounting holes with distance 80x60 mm | Wheel with roller bearing and grey rubber tyre with hardness 83 ° shore A | The double brake system, brakes the turning of the wheel and the swivel rotation. | Floor floor

Product information


- Article code 2-928 ISO
- SKU 41505
- EAN 3838461415050

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)



Product description

stainless steel Swivel castor with an overall height of 106 mm

Wheel diameter x width: 80 x 30 mm

Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 73 mm

Wheel with roller bearing and grey rubber tyre with hardness 83 ° shore A on polypropylene.

Approved and tested load capacity

Dynamic 65 kg

Static 80 kg

Temperature range:

Continous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

Advantages of this Floor floor turns Swivel castor:

- ✓ preservation
- ✓ and steam proof
- ✓ obstacle smooth pass

LIV SYSTEMS stainless steel Swivel castor + grey rubber tyre Ø80 x W30mm for 65kg Prod ID: 41525

ID 41525: Castor overall height 106 mm | 4 mounting holes with distance #\$\$ mm | Wheel with roller bearing and grey rubber tyre with hardness 83 ° shore A | Floor floor turns, floor preservation, wet and steam proof, low obstacle smooth pass

Product information


- Article code 2-965 L12
- SKU 41525
- EAN 3838461415258

Specifications

The result of our quality is maximum performance!

[Close](#)

[Close](#)

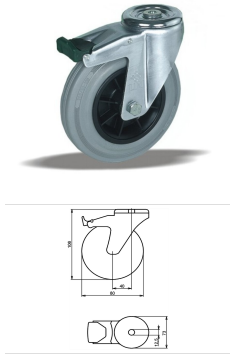

Product description

stainless steel Swivel castor with brake with an overall height of 106 mm
 Wheel diameter x width: 80 x 30 mm
 Top plate with 4 mounting holes of 12,5 mm, mounting hole distance #\$\$ mm and top plate outer dimensions: 73 mm
 Wheel with roller bearing and grey rubber tyre with hardness 83 ° shore A on polypropylene
 the double brake system, brakes the turning of the wheel and the swivel rotation.

Approved and tested load capacity

Dynamic 65 kg
 Static 80 kg

Temperature range:

Continious operation: -20 | +70°C
 Short (10 min) exposure: -30 | +80°C

Advantages of this Floor floor turns Swivel castor with brake:

- ✓ preservation
- ✓ and steam proof
- ✓ obstacle smooth pass

LIV SYSTEMS stainless steel Swivel castor with brake + grey rubber tyre Ø80 x W30mm for 65kg Prod ID: 41545

ID 41545: Castor overall height 106 mm | 4 mounting holes with distance #\$\$ mm | Wheel with roller bearing and grey rubber tyre with hardness 83 ° shore A | The double brake system, brakes the turning of the wheel and the swivel rotation. | Floor floor t


Product information

- Article code 2-979 L12
- SKU 41545
- EAN 3838461415456

Specifications

The result of our quality is maximum performance!

[Close](#)
[Close](#)

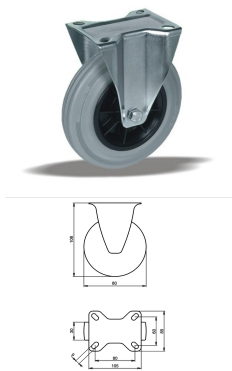

Product description

stainless steel Fixed castor with an overall height of 106 mm

Wheel diameter x width: 80 x 30 mm

Top plate with 4 mounting holes of 9 mm, mounting hole distance 80x60 mm and top plate outer dimensions: 105x85 mm

Wheel with roller bearing and grey rubber tyre with hardness 83 ° shore A on polypropylene.

Approved and tested load capacity

Dynamic 65 kg

Static 80 kg

Temperature range:

Continuous operation: -20 | +70°C

Short (10 min) exposure: -30 | +80°C

Advantages of this Floor floor turns Fixed castor:

- ✓ preservation
- ✓ and steam proof
- ✓ obstacle smooth pass

LIV SYSTEMS stainless steel Fixed castor + grey rubber tyre Ø80 x W30mm for 65kg Prod ID: 41465

ID 41465: Castor overall height 106 mm | 4 mounting holes with distance 80x60 mm | Wheel with roller bearing and grey rubber tyre with hardness 83 ° shore A | Floor floor turns, floor preservation, wet and steam proof, low obstacle smooth pass

Product information

- Article code 2-951 ISO
- SKU 41465
- EAN 3838461414657

Алматы (7273)495-231
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новаябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(7172)727-132

Киргизия +996(312)96-26-47

<https://liv.nt-rt.ru/> || vis@nt-rt.ru